Coastal and Hydraulics Laboratory

**US Army Corps
of Engineers**®
Engineer Research and
Development Center

ERDC
INNOVATIVE SOLUTIONS
for a safer, better world

Coastal Inlets Research Program

Tidal Analysis and Arrival Process Mining Using Automatic Identification System (AIS) Data

Brandan M. Scully

January 2017

The U.S. Army Engineer Research and Development Center (ERDC) solves the nation's toughest engineering and environmental challenges. ERDC develops innovative solutions in civil and military engineering, geospatial sciences, water resources, and environmental sciences for the Army, the Department of Defense, civilian agencies, and our nation's public good. Find out more at www.erdc.usace.army.mil.

To search for other technical reports published by ERDC, visit the ERDC online library at http://acwc.sdp.sirsi.net/client/default.

Tidal Analysis and Arrival Process Mining Using Automatic Identification System (AIS) Data

Brandan M. Scully

Coastal and Hydraulics Laboratory
U.S. Army Engineer Research and Development Center
3909 Halls Ferry Road
Vicksburg, Mississippi 39180-6199

Final report

Abstract

This work presents a method for extracting vessel arrival times and arrival
processes from Automatic Identification System (AIS) data. This work
employs the methodology presented by Mitchell and Scully (2014) for
inferring tidal elevation at the time of vessel movement and calculating the
tidal dependence (TD) parameter to 23 U.S. port areas for the years 2012–
2014. Tidal prediction stations and observation reference lines are
catalogued for considered ports. AIS data obtained from the U.S. Coast
Guard, and 6-minute tide predictions, obtained from the National
Oceanographic and Atmospheric Administration, are used to rank relative
tidal dependence for arriving cargo and tank vessel traffic in studied
locations. Results include relevant tide range and elevation threshold
observations for each year and location studied. AIS-derived arrival
processes, including arrival frequency, arrival rate, and interarrival time are
visualized using several techniques with comparative discussion between
ports to highlight implications for understanding seasonal traffic trends or
port resiliency. The ports with the highest and lowest TD value, Portland,
ME, and Los Angeles, CA, respectively, are discussed with regard to weekly
arrival patterns and interarrival time. Cargo composition and value
obtained through the Channel Portfolio Tool is also considered.

Contents

Figures and Tables

Figures

Tables

Preface

Unit Conversion Factors

Multiply	By	To Obtain
feet	0.3048	meters
knots	0.5144444	meters per second
knots	1.68781	feet per second

1   Introduction

Background

The U.S. Army Corps of Engineers (USACE) is responsible for planning, constructing, and maintaining a vast nation-wide network of navigation channel infrastructure in coastal and riverine systems. Environmental conditions vary widely across the network, specifically with regard to tidally driven water surface elevations. Tidal regimes include diurnal, semidiurnal, and mixed systems with virtually no tidally driven water surface changes (e.g., on the Great Lakes and inland rivers) to tidal ranges that approach 30 feet (ft) (e.g., parts of Alaska). Fluctuation of the water surface resulting from tide is significant at projects that experience the phenomenon. Vessel operators may take advantage of tidally driven water surface changes to sail with drafts larger than could otherwise be achieved without additional tidal height.

Recent examples of planning feasibility studies including harbor deepening at Savannah, GA, Charleston, SC, and the Port of New York and New Jersey, among others, demonstrate that each project considers the unique impacts of tidally varying depth when planning for project expansion. Despite the variety and importance of tidal fluctuations within the portfolio of navigation projects, a comprehensive evaluation of tidal influence across the network has not been undertaken. Possible reasons for the lack of a comprehensive evaluation include lack of access to data, lack of an objective and repeatable methodology, and the sheer scope of the problem.

Objective

The objective of this report is to capitalize on the emergence of Automatic Identification System (AIS) technology as a remote sensing tool for vessels operating within the USACE navigation project portfolio. Due to the expansive use of AIS by vessels within the coastal portion of the navigation portfolio, an opportunity exists to undertake an evaluation of navigating vessel behaviors, including those related to tidally driven water surface fluctuations, in a large sample of USACE projects.

Generally, AIS data cover most large commercial ships transiting coastal and inland navigation projects within the USACE portfolio. Coastal data

acquisition and dissemination is performed by the U.S. Coast Guard (USCG). AIS coverage for inland waterways is generally less robust than for coastal projects. Inland data coverage is expanding, with collection performed by the USACE. Once collected, data from inland regions are incorporated into the larger USCG data store. Scully and Mitchell (2015) provide insight into potential uses, interpretation, and availability of AIS data.

In the course of investigating the role of tide during vessel arrivals, it was further recognized that due to the nature of the tidal analysis performed in this study, arrival processes can be easily mined from AIS data as a byproduct of the tidal analysis information. Both tidal considerations and traffic volume and frequency estimation are identified in USACE engineering manuals as important navigation study inputs (USACE 2006). Vessel arrival processes, including arrival time, interarrival time, and arrival frequency are commonly used as inputs to USACE navigation feasibility study models. Arrival processes are normally derived from data after aggregating a variety of sources, including vessel pilot and terminal operations logs, into one dataset. The availability of a method that relies on AIS data allows for simplification and standardization.

This report is organized as follows. Chapter 2 describes the data that was used in this investigation and how data can be obtained. The methods for performing tidal analysis and determining vessel arrival processes are described in Chapter 3. Analysis results are presented in Chapter 4. Chapter 5 contains discussion of the results and their implications for waterway managers. Conclusions drawn from the investigation are presented in Chapter 6.

2   Data Description and Sources

This investigation relies on data from two primary sources. AIS data was requested manually in full resolution from the USCG via the agency's Nationwide AIS (NAIS) system. The NAIS system is designed to enhance maritime domain awareness within continental United States and territorial waters. Archived NAIS data are available from the program's historic data request page: www.navcen.uscg.gov/?pageName=dataRequest& dataRequest=aisHistoricalRequestForm. AIS data archives are also available from commercial vendors or may be collected with the use of an AIS receiver with archival capability. Water surface elevation information was requested automatically through the National Oceanographic and Atmospheric Administration (NOAA) tides and currents applications program interface (API): http://tidesandcurrents.noaa.gov/api/.

AIS data

AIS data formatting is specified by the International Telecommunication Union (ITU 2014). The data contained in position report messages include a time stamp, latitude, longitude, and course over ground. Message type 5 contains vessel particulars, including vessel and cargo type code. These four data dimensions were used in this study. The time stamp is provided in Coordinated Universal Time (UTC). Position information is provided relative to the World Geodetic Survey (WGS) 1984 datum. Time stamp and position information, both referred to as dynamic information, are automatically generated by electronic navigation systems onboard vessels using AIS technology. Position reports, contained in message types 1, 2, and 3, are generated at varying frequencies that depend on vessel behavior, ranging from 2 to 180 seconds (sec) as described in Table 2. The vessel and cargo type dimension, referred to as static since it changes very infrequently, is manually generated. This is a two-digit code, described in the ITU technical specification. Several authors, including the commonly cited work by Harati-Mokhtari et al. (2007), describe considerations that must be given to ensure AIS data quality is sufficient for specific use cases.

Water surface elevation data

NOAA predicts water surface elevation data at several frequencies for locations that are influenced by the tide. NOAA also collects water surface elevation information, which can be compared to predictions. This study

relied on water surface predictions generated at 6-minute (min) intervals for major stations within the ports of interest. Water surface elevation data is referenced to mean lower low water (MLLW) elevation datum, and prediction times are in UTC. Water surface predictions, instead of verified water surface elevations, are used for three general reasons. First, it is most likely that tide-reliant vessels planning transits will rely on predictions to plan transits, and verified information will be unavailable for planning. Second, verified information includes the effects of atmospheric and hydrologic influence that are most likely well beyond the ability of NOAA to predict accurately. Third, operational limitations including loss of tidal station measurement function may result in data gaps within the study period.

3 Methods

Scully and Mitchell (2013) and Mitchell and Scully (2014) outline a method for interpretation of water vessel surface elevation information at the time of vessel arrival. This technical report expands the level of detailed methodology provided by the authors.

Observation location selection

A reference observation line is required to investigate tidal influence. A line crossing a waterway, defined by two latitude and longitude pairs, should be selected at the location of interest. This line will be used to count the number of vessels crossing the line and to document the time of vessel crossing. Both are key methodological inputs.

Observation reference lines should be carefully selected and based on known navigation channel locations. Alternatively, reference location selection may be made using geographical features such as coastal inlets or exploratory plotting of AIS data to identify vessel position report clusters. AIS information is carried over very high frequency (VHF) radio signals, which are limited to line-of-sight transmission. Geographical features, including bridges, valleys, dense urban structures, or anything conceivably capable of interfering with AIS transmission or reception, should be avoided when selecting reference locations. Sample reference lines and tidal stations used in this study are shown for Seattle and Tacoma, WA; New York and New Jersey; Los Angeles and Long Beach, CA; and Corpus Christi, TX, in Figure 1. A reference line for each port is shown in Appendix A.

Consideration should be given to the types of vessels that are likely to use the waterway being investigated. Reference lines should be selected to capture the vessel population of interest. Challenges may be encountered in locations with complex channel network components such as loops or branches. Locations with clustered terminals and short-range shipping routes may also require further assessment of reference selection.

Figure 1. Example tide station and reference line arrangement.

This study prioritized capture of the greatest fraction possible of large commercial vessel traffic by focusing on coastal inlets to port areas. The observation reference lines used in this study are listed in Table 1.

Table 1. Port areas, reference line coordinates, and NOAA (2013a) tide stations.

Port Area Entrance	Tide Station Number	Line Beginning Coordinate	Line Ending Coordinate
Anacortes, WA	9444900	(-122.7080, 48.4792)	(-122.7109, 48.5482)
Baltimore, MD	8574680	(-76.5651, 39.2375)	(-76.5493, 39.2562)
Boston, MA	8443970	(-71.0064, 42.3192)	(-71.0080, 42.3504)
Charleston, SC	8665530	(-79.8546, 32.7592)	(-79.8703, 32.7363)
Columbia River, OR	9439040	(-124.0860, 46.2644)	(-124.0750, 46.2331)
Delaware Bay, DE	8537121	(-75.4122, 39.2619)	(-75.3200, 39.3253)
Freeport, TX	8772447	(-95.2930, 28.9296)	(-95.2898, 28.9329)
Honolulu, HI	1612340	(-157.8656, 21.2955)	(-157.8741, 21.3020)
Jacksonville, FL	8720218	(-81.4214, 30.4094)	(-81.4216, 30.3976)
Long Beach, CA	9410660	(-118.1932, 33.7230)	(-118.1726, 33.7226)
Los Angeles, CA	9410660	(-118.2544, 33.7080)	(-118.2370, 33.7134)

Port Area Entrance	Tide Station Number	Line Beginning Coordinate	Line Ending Coordinate
Mobile, AL	8737048	(-88.0447, 30.6889)	(-88.0301, 30.6923)
New Haven, CT	8465705	(-72.9348, 41.2603)	(-72.9018, 41.2480)
New York and New Jersey	8531680	(-74.0554, 40.6036)	(-74.0348, 40.6096)
Norfolk, VA	8638610	(-76.3150, 36.9513)	(-76.3595, 37.0049)
Pascagoula, MS	8741533	(-88.5698, 30.3296)	(-88.5033, 30.3202)
Port Everglades, FL	8723214	(-80.1050, 26.0960)	(-80.1055, 26.0925)
Portland, ME	8418150	(-70.2390, 43.6662)	(-70.2238, 43.6521)
San Francisco Bay, CA	9414290	(-122.4770, 37.8094)	(-122.4800, 37.8268)
San Juan, PR	9755371	(-66.1361, 18.4718)	(-66.1234, 18.4708)
Savannah, GA	8670870	(-80.8863, 32.0150)	(-80.8913, 32.0684)
Seattle-Tacoma, WA	9447130	(-122.4064, 47.6535)	(-122.5190, 47.6602)
Tampa, FL	8726384	(-82.7348, 27.6224)	(-82.7394, 27.5337)

Interpret water surface threshold elevations

This study used high-, mid-, and low-tide segments of the tidal cycle (Scully and Mitchell 2013). High tide and low tide are defined as the upper and lower time-based quartile of water surface elevations, respectively. Mid-tide is defined as the time-based interquartile range of tidal elevations. Each year's record of predicted tidal elevation (87,600 predictions at 6 min intervals for a standard year) was ordered by elevation. The 25th quartile elevation is the threshold between low and mid tide and represents the elevation below which tidal elevations occurred 25% of the year. Similarly, the 75th quartile elevation is the threshold between mid and high tide and represents the elevation above which tidal elevations occurred 25% of the year. The mid tides occurred 50% of the year between the high and low thresholds. Thresholds for each location are determined independently for each of the years 2012, 2013, and 2014.

Vessel filtering, transit generation, and water surface at time of crossing

AIS data includes many dimensions for data filtering (ITU 2014; Scully and Mitchell 2015). Filtering for this study was applied to static and dynamic data components. Data were initially received from the USCG as a collection of 1-month-increment, comma-separated value files, organized by location. The data were processed using the Python programming language (van Rossum and Drake 2001), the Pandas data analysis package

(McKinney 2012), or the developmental version of USACE AIS Analysis
Package (AISIAP) software.

Individual vessels are defined in this study as those having a unique
Maritime Mobile Service Identifier (MMSI) number. Several authors have
written about the potential complications of this approach (Harati-
Mokhtari et al. 2007). By eliminating or verifying duplicate, vague, or
incorrect MMSI numbers, most of these complications can be mitigated.
For high-accuracy applications, comparing MMSI data to verified
authoritative vessel information is recommended.

Vessels were filtered in this study based on the static "ship and cargo type"
dimension, contained in Message 5 (again, subject to human error
implications). Vessels with ship- and cargo-type codes that began with
only "7" (cargo ships) or "8" (tankers) were included. Vessels were also
filtered on the dynamic temporal, spatial, and heading dimensions,
primarily derived from Messages 1, 2, or 3.

Vessels using Class A AIS transceivers report their position according to
the reporting frequencies defined by the ITU (2014) and shown in Table 2.
A simple approach for identifying unique transits is to identify gaps in the
position report sequence that exceed normal report intervals.

Table 2. Class A AIS vessel reporting intervals (ITU 2014, Table 1).

Ship's Dynamic Conditions	Nominal Reporting Interval
Ship at anchor or moored and not moving faster than 3 knots	3 min
Ship at anchor or moored and moving faster than 3 knots	10 sec
Ship 0–14 knots	10 sec
Ship 0–14 knots and changing course	3 1/3 sec
Ship 14–23 knots	6 sec
Ship 14–23 knots and changing course	2 sec
Ship > 23 knots	2 sec
Ship > 23 knots and changing course	2 sec

Transits were defined by identifying gaps in the position report sequence
that exceed 360 sec (Scully and Mitchell 2013). This duration is chosen to
ensure that vessels reporting their position at the lowest specified frequency
(i.e., a "ship at anchor or moored and not moving faster than 3 knots") will
have at least one position identified if it is reporting normally and its signal

is unobstructed. These vessels are not generally of interest when assessing water surface elevation during transit. Ships moving with speed between 0 and 14 knots report at the next most frequent interval, one report every 10 sec. Vessels moving with speeds in this range will have ample position reports to construct a transit. Vessel reports that have been smoothed to a frequency lower than one report per 3 min will require a longer gap length or different transit generation method to reliably treat the data.

Vessel transits are limited by spatial filters. First, a 5,000 ft buffer was applied to either side of each observation reference line. Minimum bounding envelope geometry was applied to buffered areas to create regularly arranged rectangles for filtering. Vessels crossing each reference line are expected to transit on the order of 10,000 ft across the local study area.

The shortest report duration is specified as one report every 2 sec for vessels transiting at speeds greater than 23 knots. A vessel moving at 23 knots (38.8196 ft/sec) will sail 10,000 ft in approximately 258 sec and report its position approximately 129 times. This buffer distance ensures that transiting vessels among the population of interest will generate at least two position reports within each study area, ensuring transit generation.

Vessels were classified as either transiting inbound or outbound based on the heading data dimension. To facilitate this classification, an inbound direction vector was arbitrarily defined as being approximately normal to each observation reference line and pointing away from the open ocean and toward the port area of interest. Vessels were classified as inbound if the course over ground values of each transit were within +/- 90° of the cartographic direction of the inbound definition vector, and outbound otherwise. For example, if the inbound direction vector is defined to have a cartographic heading of 300°, then inbound vessels are those with course over ground ranging from 210° to 360° and from 0° to 30°. Only inbound vessels were included in this study.

To summarize the filtering scheme, only unique tanker and cargo vessels (based on unique identifying information and ship and cargo type code contained in AIS), heading away from the open ocean and toward selected ports (based on AIS embedded course over ground information) were considered. Vessels were selected from conservative buffer regions around

observation reference lines chosen to capture deep-draft vessel traffic. Analysis was performed for each location discretely in 2012, 2013, and 2014. Aside from this filtering, data were not thoroughly controlled for quality owing to the large quantity of data. This induces the risk that a fraction of the vessel population is missing or incorrectly classified within the AIS record. In all, over 120,000 vessel transits were generated to assess tidal influence.

Linear interpolation is used to determine the time at which vessels cross observation reference lines. The nearest position report to either side of the reference line is selected, and the time difference between reports is calculated. The distance between these two positions, and the distance from the earlier position report to the observation reference line, are also determined. The vessel-crossing offset is computed as the proportion of the reference line distance to the total distance. The offset is then multiplied by the time difference between position reports and added to the time of the earlier position report, yielding the time of vessel crossing.

Interpret water surface elevation at time of vessel crossing

The water level at the time each vessel crossed a reference line is linearly interpolated from the water level record using the time of vessel crossing and assigned to that transit. Vessels in transit generally move faster laterally than the tide can rise or fall over short periods of time. The most extreme tides in the world, at the Bay of Fundy, have been documented to experience changes in water surface elevation of 56 ft in approximately 12.42 hours (hr) (NOAA 2013b). The water surface elevation changes at a rate of 1.3×10^{-3} ft/sec (7.4×10^{-4} knots). A vessel reporting its position every 3 min would observe a change in water surface elevation of approximately 0.3 ft at that location. Since most vessels of interest to this study report their position every 10 sec, and the tidal variations at study locations are much less than the example (Seattle had the greatest tidal range at 16.71 ft), it is assumed the resulting errors in water surface elevation at time of vessel crossing are negligible.

It was further assumed that errors in water surface interpolation resulting from hydraulic friction loss over the distance between prediction location and observation location were negligible. For instance, the tidal prediction station at the port of Anacortes, WA, provides high- and low-tide predictions, based on the harmonic tidal observing station 9444900 at Port Townshend, WA, but does not provide 6 min water level predictions.

The Port Townshend station is approximately 28 miles from the observation line used to analyze Anacortes traffic. The Anacortes prediction station provides a time and elevation offset to the harmonic station. High tides at the Anacortes are predicted to occur 22 min later than at Port Townshend, and the tidal height is approximately 96% of the high-tide height. Low tide occurs approximately 33 min later at Anacortes than Port Townshend, and the low-tide heights are approximately equal.

The difference in high-tide height between Anacortes and Port Townshend is less than 6 inches (in.), or 3.9% of the observed tidal range. The diurnal tide range for Port Townshend is 9 ft, and the tidal period is approximately 12.42 hr, meaning a normal tide celerity of 0.72 ft per hr. A 33 min lag would result in approximately 5 in. in tide differential. The combined tide height and time lag errors amount to approximately 1 ft of the observed average tide range of 12.98 ft, which amounts to approximately 7.7% error. Because the observation reference line for Anacortes is closer to the Port Townshend harmonic station than the Anacortes prediction station, it can be expected that induced errors will be smaller.

Calculate tide sector traffic percentages and tidal dependence metric

After assigning the water level to each observed transit, compare water level transits to tide thresholds to apportion traffic to tidal cycle segments. The proportion of vessels assigned water surface elevations below the low-tide threshold is T_{25}. The proportion of vessels transiting above the high-tide threshold is T_{75}. T_{50}, the portion of traffic transiting during mid-tide, can be calculated as $1 - (T_{25} + T_{75})$.

The tidal dependence (TD) metric (Mitchell and Scully 2014) is calculated as

$$TD = \left(T_{75} - T_{25}\right) / T_{50} \tag{1}$$

The refined tidal dependence metric is intuitive. It is formulated such that vessel traffic uniformly distributed across the tidal cycle will result in a TD value of unity. Traffic regimes with dominant high-tide traffic will result in positive TD values whereas low-tide dominated ports will be negative. Mid-tide traffic acts to scale the value—as the mid-tide proportion of transits increases the TD parameter approaches zero. As the mid-tide proportion of transits decreases, the balance of high-tide vs. low-tide traffic becomes more

apparent, driving the value toward +/- ∞ asymptotically until the mid-tide portion equals 0.

Arrival process mining

Linear interpolation of the time of vessel arrival was demonstrated for single vessels in the previous section "Vessel filtering, transit generation, and water surface at time of crossing." The time of vessel arrival is a critical input to port feasibility studies and is a fundamental input to arrival rate and interarrival process mining. Vessel arrival time is a required input to models that seek to quantify the impacts to changes in navigation infrastructure. Aggregating individual arrival times for a vessel population at the reach or port level results in the arrival frequency distribution of the navigation feature, which describes larger operations.

Arrival processes of general interest to USACE navigation planners and operators alike include the arrival rate and the interarrival time of vessels calling in a port or reach. The arrival rate is a measure of vessel arrivals per unit time. This measure is derived by dividing the number of arrivals by the unit time of interest. Vessels per day or month are commonly used as benchmark indicators of vessel activity. Long-term averages of vessel arrival rates can be compared to short-term arrival rates to identify peaks and lulls in vessel activity. Interarrival time is calculated by ordering vessel arrivals chronologically and calculating the time between arrivals to find the distribution.

4 Results

The methods described in the preceding section facilitate tidal analysis and arrival process extraction between geographically separated locations with differing tidal patterns. Table 3 summarizes the overall description of investigated port areas and includes the distance from tide stations to observation lines and observed tidal patterns. Values averaged over the years 2012, 2013, and 2014 include mean threshold elevations, tidal range, and the number of arriving vessels included in the analysis.

Table 3. Port area tidal information.

Port Area Entrance	Distance from Tide Station (miles)	Tidal Pattern	Mean 25th Percentile Elevation (ft)	Mean 75th Percentile Elevation (ft)	Avg. Tide Range (ft)	Avg. Number. Arriving Vessels
Anacortes, WA	28.2	mixed	3.19	7.05	12.98	473
Baltimore, MD	1.8	semi-diurnal	0.43	1.16	2.71	953
Boston, MA	2.8	semi-diurnal	1.99	8.41	14.43	719
Charleston, SC	4.3	semi-diurnal	1.11	4.69	8.29	1978
Columbia River, OR	15.3	mixed	2.43	6.73	12.53	1572
Delaware Bay, DE	2.8	semi-diurnal	1.07	4.92	8.86	2161
Freeport, TX	1.1	mixed	0.60	1.37	3.12	797
Honolulu, HI	0.7	mixed	0.36	1.25	3.11	1014
Jacksonville, FL	0.7	semi-diurnal	0.94	4.02	7.50	1541
Long Beach, CA	5.1	mixed	1.69	3.99	8.88	2003
Los Angeles, CA	1.6	mixed	1.69	3.99	8.88	2320
Mobile, AL	1.3	diurnal	0.43	1.20	2.98	690
New Haven, CT	2.1	semi-diurnal	1.26	5.37	9.13	138
New York and New Jersey	9.8	semi-diurnal	1.03	4.11	7.78	4608
Norfolk, VA	2.3	semi-diurnal	0.52	2.17	4.11	3989
Pascagoula, MS	3.3	diurnal	0.36	1.14	3.00	764
Port Everglades, FL	25.1	semi-diurnal	0.44	1.76	3.66	3083
Portland, ME	0.7	semi-diurnal	1.75	8.11	13.84	269
San Francisco Bay, CA	1.1	mixed	1.87	4.48	8.94	3143
San Juan, PR	1.2	mixed	0.41	1.12	2.62	1233
Savannah, GA	0.8	semi-diurnal	1.49	6.12	10.48	2471
Seattle-Tacoma, WA	6.8	mixed	4.30	9.36	16.71	1821
Tampa, FL	11.6	mixed	0.71	1.64	3.75	1007

Tidal analysis

Figure 2 shows the average of 2012, 2013, and 2014 tidal segment traffic percentages for each studied port, ordered by increasing low-tide traffic percentage. Portland, ME, had the greatest percentage of vessel traffic, 33.5%, moving above the high-tide threshold. New Haven, CT, and Anacortes, WA, stand out as having a relatively high portion of high-tide traffic. Los Angeles, CA, had the lowest percentage of vessel traffic, 20.1%, transiting above the high-tide threshold. Los Angeles, CA, and Long Beach, CA, both stand out as having a relatively high proportion (29%) of traffic arriving below the low-tide threshold. Portland had the lowest fraction of traffic arriving below the low-tide threshold, at 13%.

Figure 2. Average 2012–2014 low-, high-, and mid-tide traffic distributions.
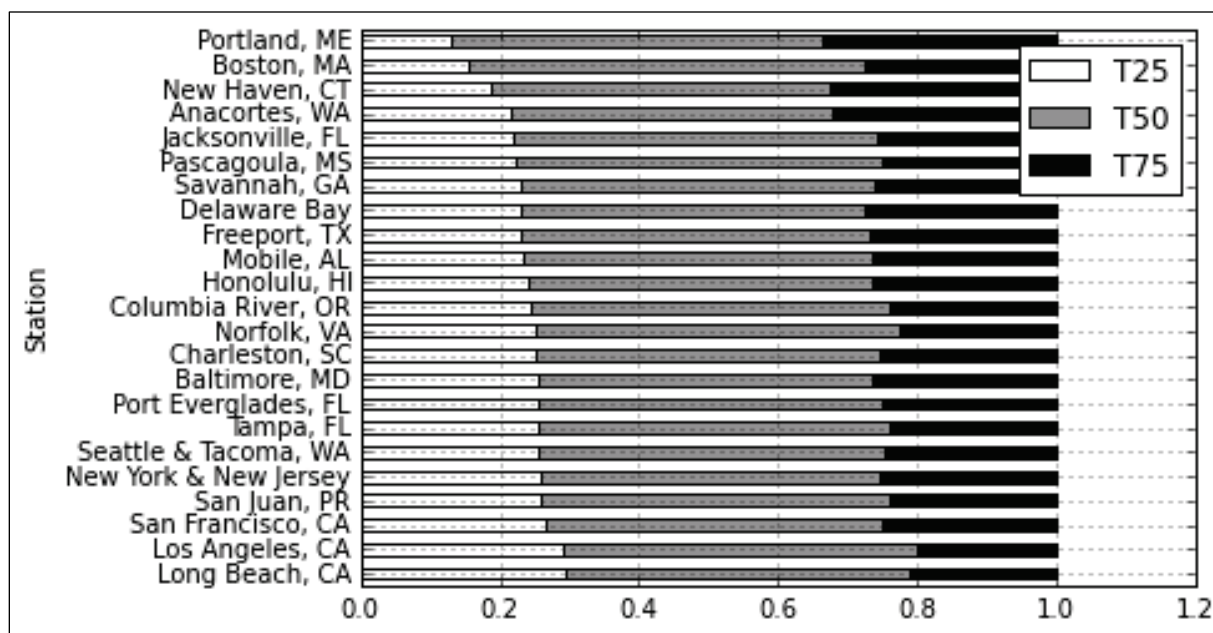
Average traffic percentages and TD values are summarized for each port in Table 4. The fraction of traffic moving on the ends of the tidal range for Portland, ME, is 46%, compared to Los Angeles, which is 49%. While these two ports show the greatest tidal imbalances, they are not the ports with the greatest fraction of traffic moving above or below the respective high- and low-tide thresholds. Anacortes saw the highest proportion of traffic, at 54%, move outside of mid-tide. Boston saw the lowest fraction of traffic moving outside of mid-tide, at 43%. The variable range of traffic in point terms was similar for all segments: 16 for low tide, 11 for mid tide, and 13 for high tide.

Table 4. Average 2012–2014 T_{25}, T_{50}, T_{75}, and TD values.

Port Area Entrance	T_{25} (mean)	T_{50} (mean)	T_{75} (mean)	TD (mean)
Anacortes, WA	0.22	0.46	0.32	0.24
Baltimore, MD	0.25	0.48	0.26	0.02
Boston, MA	0.16	0.57	0.28	0.21
Charleston, SC	0.25	0.49	0.26	0.01
Columbia River, OR	0.25	0.53	0.23	-0.01
Delaware Bay, DE	0.23	0.50	0.27	0.10
Freeport, TX	0.23	0.50	0.27	0.07
Honolulu, HI	0.24	0.50	0.26	0.05
Jacksonville, FL	0.22	0.52	0.26	0.07
Long Beach, CA	0.29	0.50	0.21	-0.17
Los Angeles, CA	0.29	0.51	0.20	-0.18
Mobile, AL	0.23	0.50	0.26	0.06
New Haven, CT	0.19	0.49	0.33	0.29
New York and New Jersey	0.26	0.49	0.25	-0.01
Norfolk, VA	0.25	0.52	0.23	-0.05
Pascagoula, MS	0.22	0.53	0.25	0.05
Port Everglades, FL	0.26	0.50	0.25	-0.01
Portland, ME	0.13	0.53	0.33	0.39
San Francisco Bay, CA	0.27	0.49	0.25	-0.03
San Juan, PR	0.26	0.50	0.24	-0.04
Savannah, GA	0.23	0.51	0.26	0.06
Seattle-Tacoma, WA	0.26	0.50	0.25	-0.02
Tampa, FL	0.26	0.51	0.24	-0.04

Figure 3 shows the TD value of each port in descending order. This plot can be interpreted to identify where preference for traffic moving in a particular tide segment exists. Portland traffic can be said to demonstrate a preference for high tide whereas Los Angeles can be said to exhibit low-tide preference. Charleston, SC, and Columbia River, OR, can be said to show weak tidal preference. It is interesting to note that Boston and Anacortes, the ports with the least and most traffic moving in any tidal segment, respectively, both show a relatively high preference for high-tide transits.

Figure 3. Average (2012-2014) TD value for inbound cargo and tanker vessels.
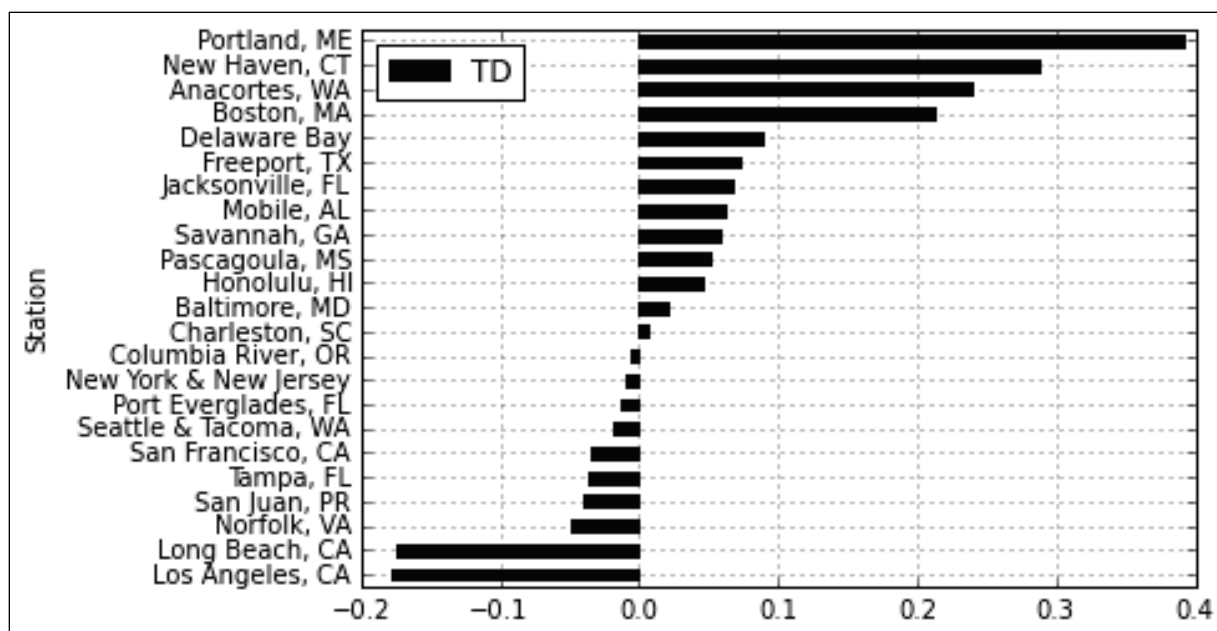
Arrival processes

The number of vessels arriving at each port per day, calculated as the total number of observed arrivals per year divided by the number of days in that year, provides an indication of potential traffic congestion within the port. Arrival process mining from AIS data results in the arrival rates displayed in Figure 4. The majority of studied ports have fewer than 10 vessel arrivals per day. New York and New Jersey had the highest arrival rate with an average of 12.6 vessels per day. New Haven had the lowest arrival rate (0.4 arrivals per day). The ports of Los Angeles and Long Beach had a combined arrival rate of 11.9 vessels per day, ranking it as the second busiest port area in the study, ahead of Norfolk with a rate of 10.9 arrivals per day.

Figure 4. Daily arrivals at studied ports, 2012-2014.

Average Arrivals Per Day, 2012-2014

Port	Arrivals per Day
Tampa, FL	2.8
Seattle & Tacoma, WA	5.0
Savannah, GA	6.8
San Juan, PR	3.4
San Francisco, CA	8.6
Port Everglades, FL	8.4
Portland, ME	0.7
Pascagoula, MS	2.1
New York & New Jersey	12.6
Norfolk, VA	10.9
New Haven, CT	0.4
Mobile, AL	1.9
Los Angeles, CA	6.4
Long Beach, CA	5.5
Jacksonville, FL	4.2
Honolulu, HI	2.8
Freeport, TX	2.2
Delaware Bay	5.9
Columbia River, OR	4.3
Charleston, SC	5.4
Boston, MA	2.0
Baltimore, MD	2.6
Anacortes, WA	1.3

Figure 5 shows the relative percentage of vessel arrivals per day of the week at Los Angeles, CA, and Portland, ME, the two most tidally influenced ports identified through this analysis. The frequency distributions are similar, generally declining from Monday through Sunday. This observation was common in many ports and suggests that the previous arrivals-per-day measure under-reports arrivals Monday through Friday and over-reports arrivals on Saturday and Sunday. Los Angeles traffic was observed to peak on Monday and Wednesday with 17% of traffic arriving each of those days. Portland traffic was observed to arrive with peak frequencies on Monday, Thursday, and Friday, each with approximately 15% of traffic on each of those days. The least frequent arrival day in both cases was Sunday, with arrivals of 10% and 13% of traffic arriving that day in Los Angeles and Portland, respectively.

Figure 5. Vessel arrival frequencies are similarly distributed at Los Angeles, CA, and Portland, ME.
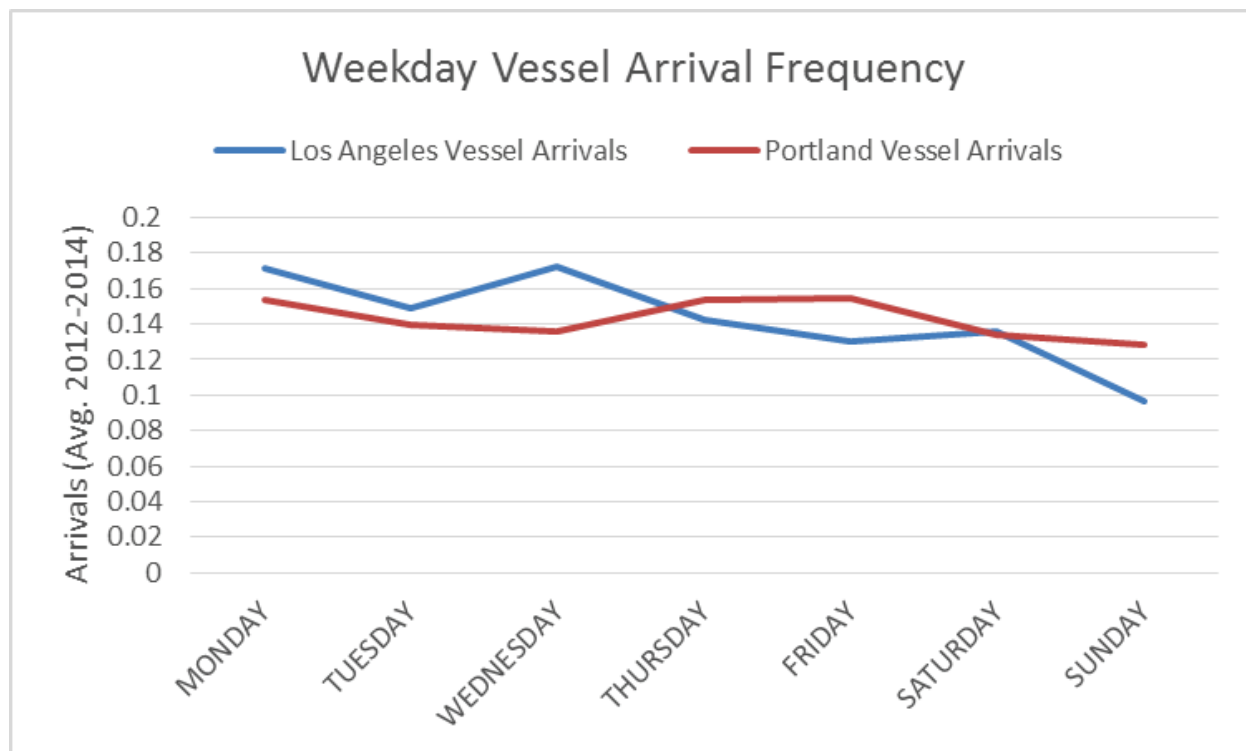
Greater detail of vessel arrival patterns is available from the AIS-derived vessel arrival data. Figure 6 shows the number of vessels observed to arrive at the ports of Los Angeles, CA, and Portland, ME, in 2012 by day of the week and hour of the day. It is evident from this mapping that seemingly similar traffic distributions have very different daily patterns. Portland demonstrates weak clustering of vessel arrivals whereas Los Angeles demonstrates strong arrival clusters Monday through Saturday, centered around 1200 (UTC) and 2200 (UTC).

Figure 7 shows the interarrival times for cargo and tanker vessels calling at Los Angeles, CA, and Portland, ME, binned in 1 hr increments. The time between arrivals at Los Angeles follows a negative exponential distribution. Fully 35% of arrivals at Los Angeles are followed by another arrival within 1 hr. These arrival processes can be informative when drawing conclusions or making decisions related to vessel traffic within a port. For instance, interarrival time distributions may be used to inform discussions regarding the time required to recover from traffic disruptions.

Figure 6. Daily vessel arrivals by hour for Portland and Los Angeles, 2012.

Vessel Call Frequency, Portland, ME, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	1	0	1	0	1	4	2	2	2	3	3	2	7	2	2	0	1	4	0	4	3	2	2	3
TUE	1	0	2	1	1	1	1	1	2	0	3	0	4	2	2	5	0	3	2	2	3	4	1	0
WED	2	1	0	2	2	2	1	0	1	2	3	2	1	3	4	3	0	4	0	2	4	1	0	0
THU	4	0	1	1	1	2	1	2	1	0	1	0	2	3	2	3	2	2	0	2	2	2	4	3
FRI	3	1	6	0	1	2	0	0	1	1	2	5	1	4	3	3	4	3	1	3	3	2	1	1
SAT	2	1	0	1	1	0	0	0	0	1	1	2	2	1	1	5	2	5	1	1	3	2	2	1
SUN	2	1	0	2	1	2	3	2	1	2	0	2	1	1	0	0	0	0	2	2	1	2	1	0

Hour (UTC)

Vessel Call Frequency, Los Angeles, CA, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	7	9	2	6	3	4	0	7	9	15	53	49	12	10	4	5	4	2	2	14	53	72	36
TUE	12	13	7	2	5	1	6	2	2	4	12	36	35	13	1	4	2	3	5	4	19	59	42	21
WED	15	13	8	2	6	2	6	2	3	3	9	37	54	33	8	2	2	2	3	7	8	27	55	40
THU	22	20	7	2	6	0	5	3	1	1	2	13	38	31	7	3	5	2	2	5	5	13	23	20
FRI	14	5	8	5	4	3	4	0	1	2	3	49	35	16	7	4	5	4	5	2	11	36	30	22
SAT	13	7	6	4	3	0	1	3	1	0	1	17	52	31	2	2	2	3	2	3	14	16	20	11
SUN	3	7	2	3	3	3	2	2	1	1	2	8	15	11	8	2	3	3	2	2	3	45	27	12

Hour (UTC)

Figure 7. Interarrival times show differing levels of congestion at Los Angeles, CA, and Portland, ME, in 2012.

2012 Interarrival Times, Cargo and Tanker Vessels

Los Angeles, CA (1938) — Portland, ME (287)
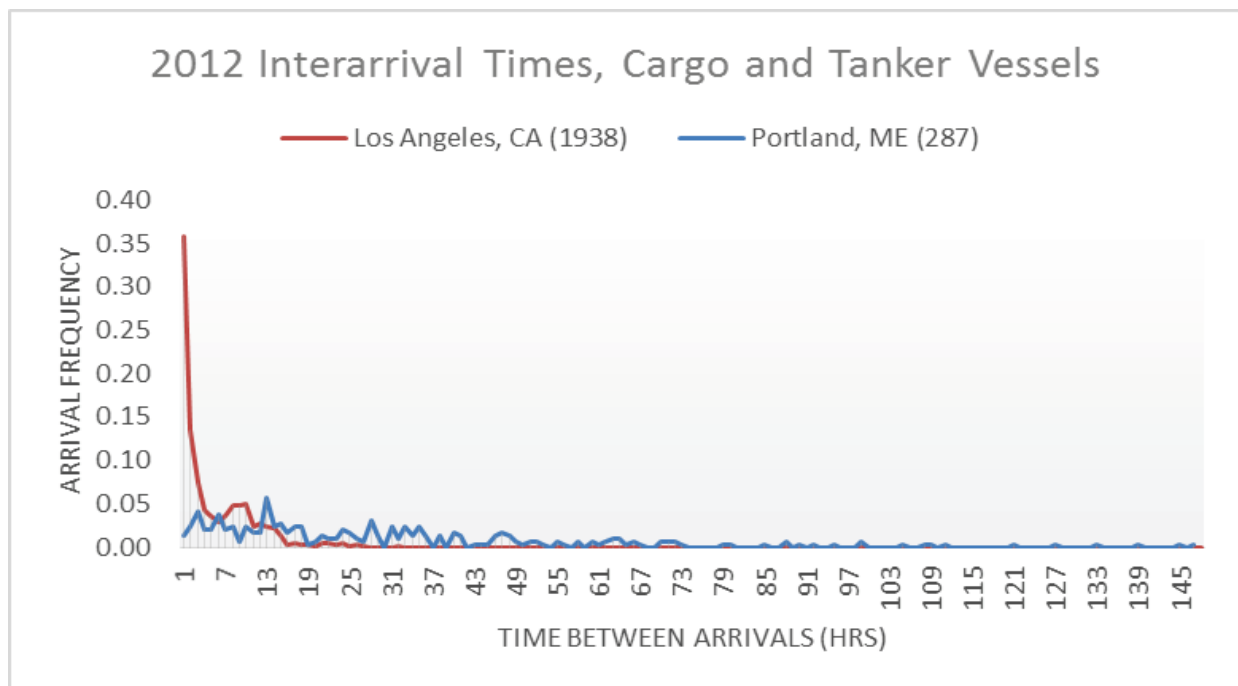
Monthly arrival rates can be mined from AIS data to help identify larger traffic patterns if they exist within a port. For example, this analysis of AIS data suggests a spring peak in vessel arrivals in Tampa in 2012–2014, shown in Figure 8(a), and a summer peak in arrivals in the Columbia River in 2012 and 2013, shown in Figure 8(b). The frequency range of monthly arrivals may serve as a metric for variability of port traffic. The Columbia River had the greatest range of arrival frequency (13.3%), while Seattle and Tacoma, shown in Figure 8(c), had the narrowest range (2.0%).

A complete set of results for each port is provided in Appendix A. Results for each port include

- general arrangement of the tide station and observation reference line
- tidal station information
- yearly summary for water surface thresholds and observed tidal range
- yearly summary for number of vessel arrivals, vessel interarrival time, and arrival frequency
- yearly summary for tide segment traffic percentages
- yearly distributions of vessel arrival by water surface elevation.

Figure 8.Monthly arrivals at (a) Tampa and (b) Columbia River showing seasonal increases in vessel arrivals. Columbia River had the widest range of monthly arrival frequencies. (c) Seattle and Tacoma had the narrowest range of arrival frequencies

(c)

Seattle & Tacoma Arrivals Per Month, 2012-2014
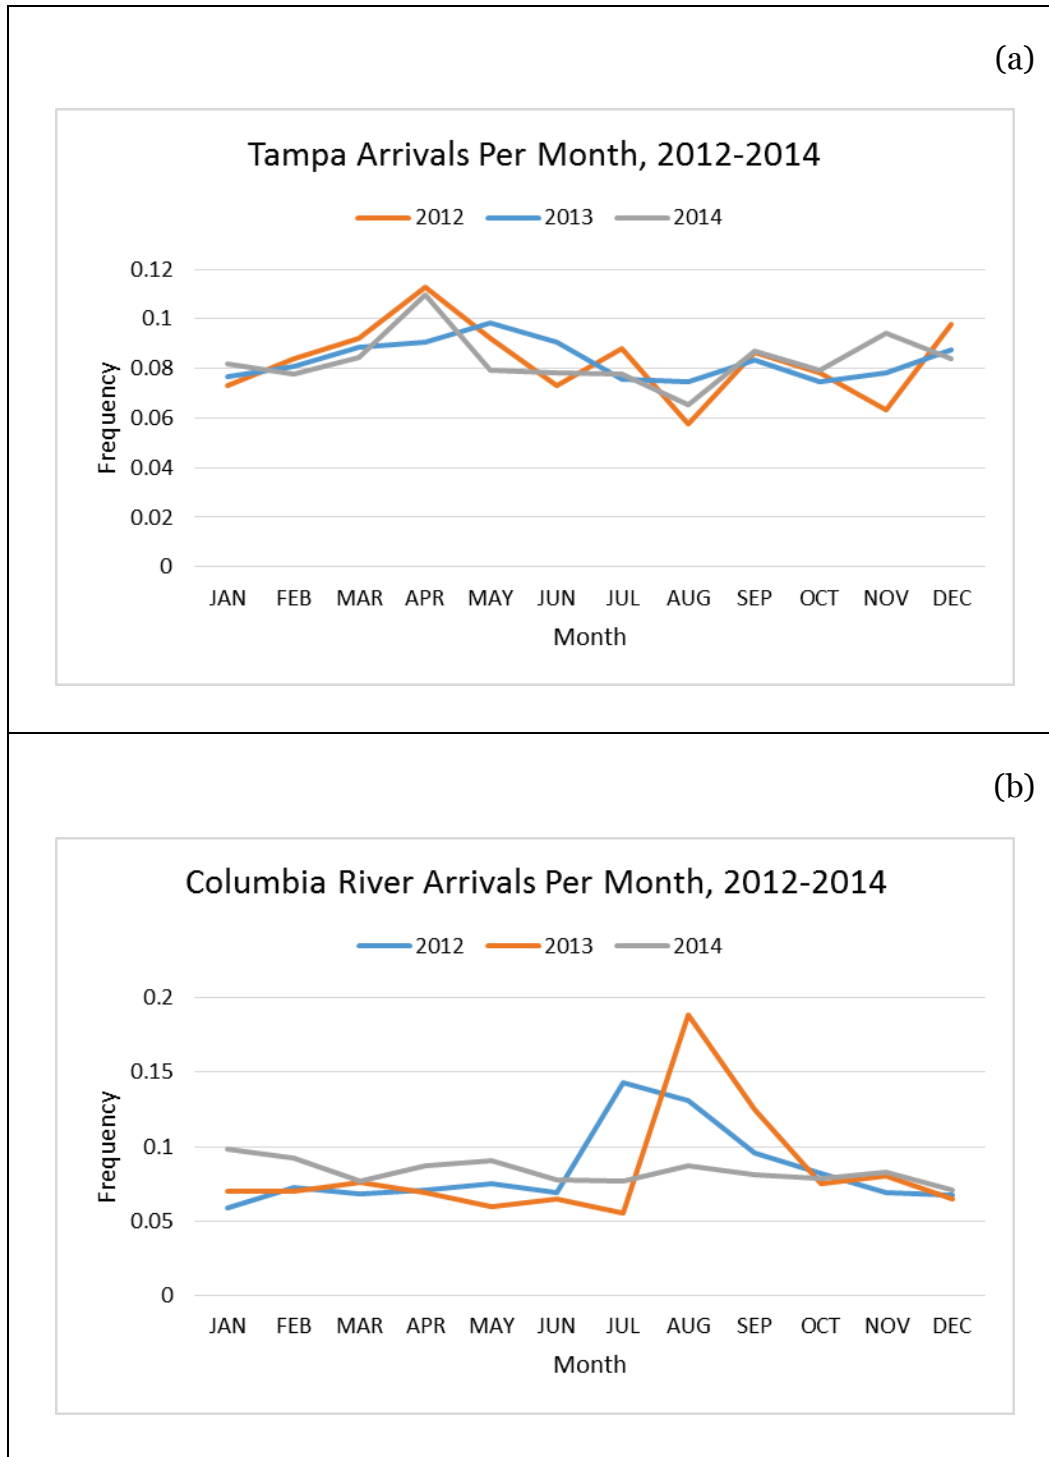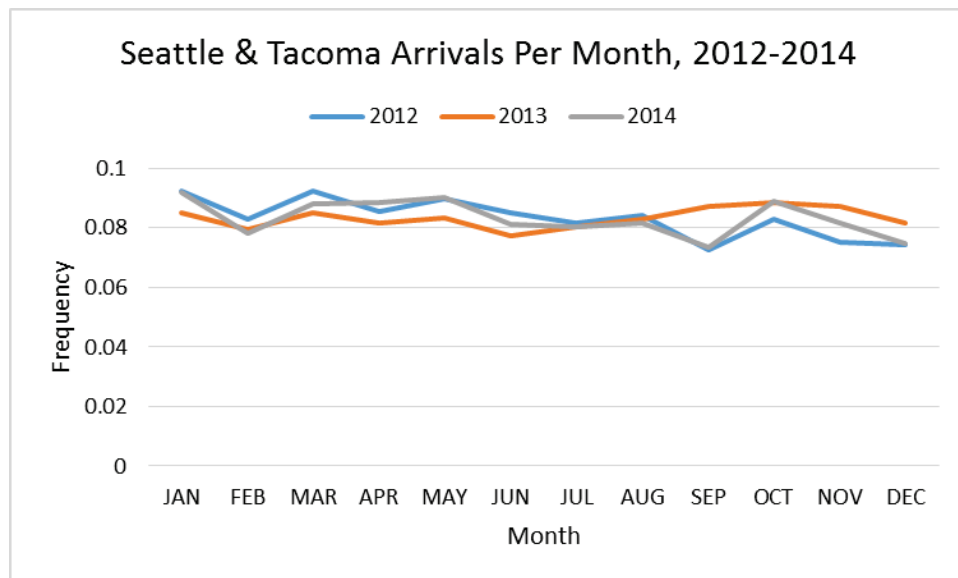
5   Discussion

Prior to the availability of AIS data, a multiport analysis of this scope and detail was impractical. USACE typically analyzes vessel movement data provided from third parties such as shipping terminal operators or harbor pilots in the course of feasibility studies when considering harbor improvement. These sources may report vessel movement only as they apply to their operations. For example, a terminal operator may report the time a vessel arrives but would have limited information regarding the path taken by a vessel or the duration of its transit. Similarly, pilots may log only the time they embark a vessel. Data generally do not refer to the physical location of a vessel in transit but instead refer to the times of arrival or departure at a particular landmark. Each port has many potential sources, which must be consulted to obtain a complete picture of harbor operations. There is no standard format for compiling or reporting this information, which must be painstakingly gathered and organized for detailed analysis.

Recently, the Channel Portfolio Tool (CPT) (Mitchell 2012) has improved the ability to investigate the use of navigation channels in support of commodity movement. This tool relies on proprietary dock-level waterborne commerce data and uses spatial-join and shortest-path algorithms to aggregate and attribute cargo tonnage and dollar-value totals to the respective transited reaches. However, since the tool is based on annualized reported statistics, it does not incorporate the actual behavior of vessels while in transit. AIS data are available in real time and document the actual paths taken by vessels but lack the cargo details available from waterborne commerce data though CPT. Thus, the arrival process mining techniques discussed in this report serve to complement the CPT for providing USACE practitioners highly detailed project-specific vessel traffic information. Together, CPT- and AIS-derived information help to complete the waterfront operational picture.

AIS data provide a practical alternative to some traditional vessel observation methods as spatial and temporal information is captured in a single technology platform and avoids some problems encountered with traditional observation techniques (Scully and Mitchell 2015). Winkler et al. (2003), Briggs et al. (2004), and Maynord (2007) are examples of field collection efforts that would benefit from use of AIS data. For determining vessel arrival patterns and other behaviors, benefits over standard practice arise from the high granularity, standard format, automated collection,

lower acquisition cost, and centralized aggregation of AIS data. Operational benefits include continued collection in low visibility, darkness, and situations when vessels appear at differing locations with the channel, all of which were challenges described by Maynord (2007). Primarily, the decreased cost and increased scope of data availability that enable nationwide investigation of relevant topics are demonstrated here. AIS technology overcomes most environmental-related limitations arising from adverse weather conditions or poor visibility. However, AIS data collection is limited in some cases by line-of-sight obstruction from vessel broadcast and shore-side receiving stations, which must be considered when using AIS data for detailed analysis.

When arrivals are visualized as shown in Figure 6, periods of higher (or lower) use within a single port become obvious. Differences in usage patterns between ports also become obvious when these distributions are compared. Arrival frequency distributions may provide insight that enables port managers to make better informed decisions in support of operations.

The automated nature of AIS data broadcast and collection allows for automated repetition of desired analyses according to project-specific or programmatic goals. Data for an entire port can be obtained from a single source by employing methods described in this report. Consider that this type of tidal analysis could be performed year over year to monitor changes in vessel behavior. Alternatively, tidal analysis could be performed after harbor improvements to validate assumptions made regarding the use of available water levels, which would inform future design efforts.

By investigating the distribution of vessel transits with regard to tidal elevation, it becomes possible to attempt grouping and categorizing ports based on the usage patterns of incident vessels. For instance, Figure 9 depicts the proportion of vessels calling above each port's respective high-tide threshold versus the percentage of vessels calling below that port's low-tide threshold. While the average of the fraction of low-tide traffic is similar across regions, Atlantic ports have a range of T_{25} values triple that of Gulf ports and nearly double that of Pacific ports. Similar observations may be made with regard to the range of T_{75} values. Given that vessels arriving anywhere are in theory free to call at any tidal stage, the cause and meaning of these observations require further study to be determined.

Figure 9. Visualization of fraction of vessels arriving above vs. below respective tidal elevation thresholds by region. Much more variation is evident at Atlantic and Pacific ports than at Gulf ports.
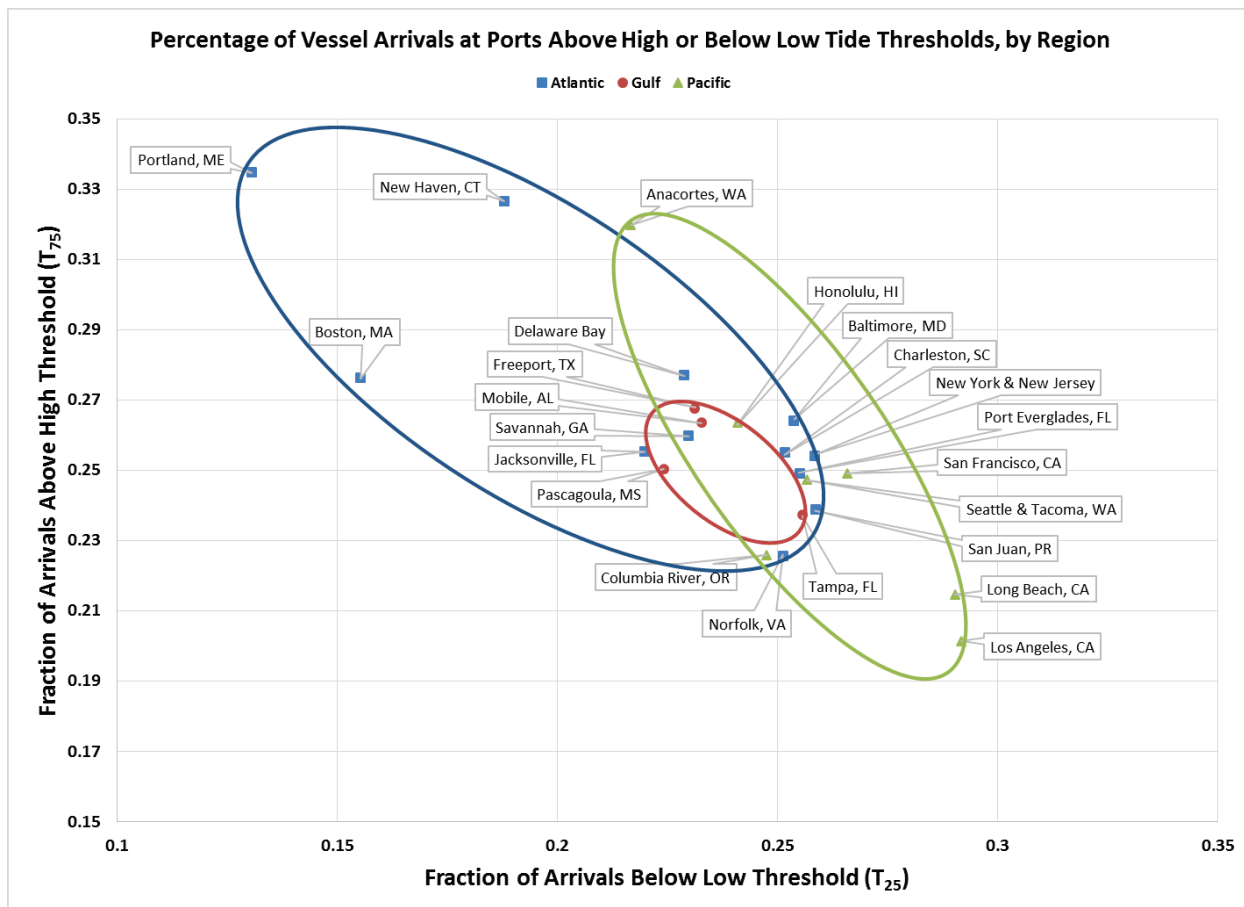
Figure 10 highlights the possibility of using the tidal dependence metric to monitor changes in vessel distribution across the tidal cycle. Emergent trends may be used to inform decisions related to maintenance or expansion investment priorities. For instance, Savannah, GA, shows an increasing trend in TD values over this 3-year sample. This is too brief a record from which to draw strong conclusions, but Savannah is presently undergoing harbor deepening; the port is well documented as being visited more frequently by vessels that are tidally constrained due to large drafts relative to available depth. The decreasing trends in TD value at Portland and Los Angeles, on either end of the spectrum, are also interesting. Further conclusions of the relevance or stability of these trends can only be made by expanding the temporal scope of investigation.

Figure 10. TD values by port and year visualized for year-over-year stability.

	TD Value by Port and Year		
	2012	2013	2014
Los Angeles, CA	-0.16	-0.18	-0.19
Long Beach, CA	-0.11	-0.20	-0.20
Norfolk, VA	-0.05	-0.08	-0.02
San Juan, PR	-0.02	-0.05	-0.05
Tampa, FL	-0.05	-0.04	-0.02
San Francisco,CA	-0.02	-0.05	-0.04
Seattle & Tacoma, WA	0.00	-0.03	-0.03
Port Everglades, FL	0.01	-0.03	-0.02
New York & New Jersey	-0.04	0.00	0.01
Columbia River, OR	-0.04	0.02	0.00
Charleston, SC	0.05	-0.03	0.01
Baltimore, MD	-0.04	0.04	0.05
Honolulu, HI	0.09	0.04	0.01
Pascagoula, MS	0.04	0.09	0.02
Savannah, GA	0.00	0.07	0.11
Mobile, AL	0.08	0.02	0.09
Delaware Bay, DE	0.03	0.16	0.10
Jacksonville, FL	0.10	0.10	0.01
Freeport, TX	0.10	0.06	0.07
Boston, MA	0.23	0.16	0.25
Anacortes, WA	0.52	0.08	0.11
New Haven, CT	0.41	0.19	0.26
Portland, ME	0.55	0.42	0.21

Figure 11 shows the solution space of the TD metric for all values of T_{25}, T_{50}, and T_{75}. This figure makes it clear that the metric is highly sensitive to reductions in mid-tide traffic, especially when the T50 fraction approaches 10% of the total traffic population. Below 10% of vessels operating at mid tide, the TD metric is increasingly sensitive to imbalances between the high- and low-tide traffic fractions. Within the full range of possible T_{50} values, the raw T_{25} and T_{75} values inform cases where high and low tide are approximately equal.

Figure 11. Numerical solution for possible of TD. All ports investigated for this work fall within the range of $0.3 \leq T_{50} \leq 0.6$.
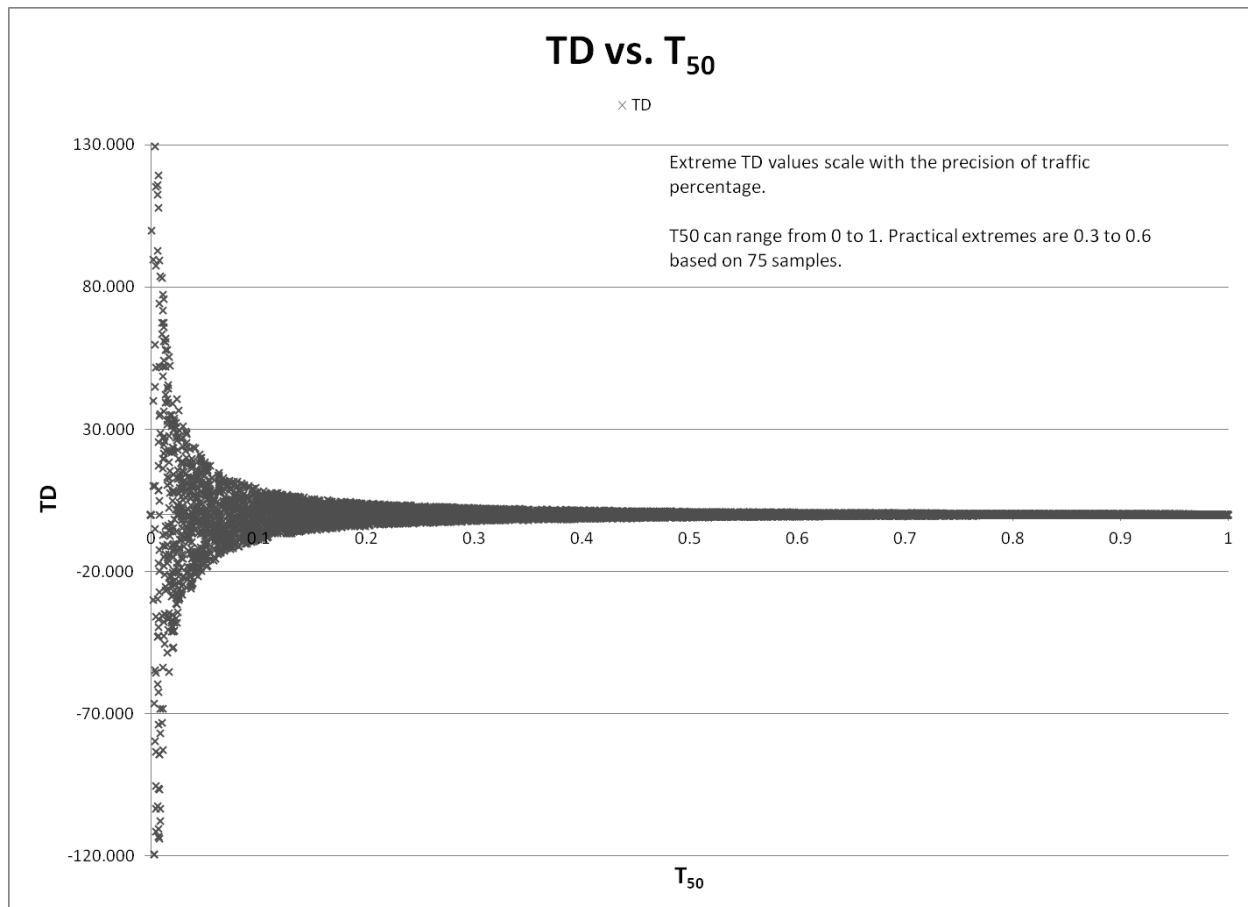
Among the observed ports, the mid-tide portion of traffic ranged from 0.46 at Anacortes, WA, to 0.57 at Boston, MA. Within this range of mid-tide percentage, the maximum expected magnitude of TD values range from +/- 1.17 to +/- 0.75. The minimum and maximum calculated values, -0.20 at Long Beach, CA (2013 and 2014), and 0.55, at Portland, ME (2012), respectively, fall within this range. The TD metric as currently formulated is limited by the fact that the variability of resultant values is perhaps too narrow to make meaningful comparisons across ports with T50 values near 0.5, especially when T25 and T50 values are approximately equal.

Note the vessel arrival behavior with regard to the value of the TD metric. The maximum individual and average values (0.55 and 0.39, respectively) were observed at Portland, ME. Portland has nearly triple the volume of arrivals above the 75th percentile water elevation (33%) compared to arrivals below the 25th (13%) on average. Conversely, Los Angeles, CA,

demonstrated the lowest average TD value of -0.18 and had only 45% more low-tide calls (29%) compared to arrivals at high tide (20%). Long Beach, CA, had the lowest individual TD value of -0.20 with traffic composition similar to Los Angeles. Mid-tide calls were nearly evenly distributed at Portland and Los Angeles, with 53% and 51%, respectively, while Long Beach had 50% traffic during mid-tides.

The arrival frequency at Los Angeles and Portland, shown in Figure 6, indicates that temporal clustering is much stronger at Los Angeles than at Portland. As average tidal frequency and the 24 hr day are unequal, it is expected that vessels taking advantage of high tide would show weak clustering behavior due to the shifting time of tidal events compared to regular daily schedules. Instead, vessel arrival patterns would mimic the occurrence pattern of high-tide events. At Los Angeles, where call clustering is strongly apparent and indicative of regular daily operations, low- and high-tide arrivals are much more balanced. This is to be expected, again because tidal frequency is out of sync with a 24 hr daily schedule. The interarrival time distribution, shown in Figure 4, indicates that vessel calls are spread out at Portland and are very rapid at Los Angeles (which had approximately nine times as much traffic). This further suggests a relationship between traffic volume, temporal clustering, and the TD value. Still, the preference for low tide at Los Angeles is curious given the strong clustering pattern.

It is likely that the variation in vessel arrival behavior is related to the vessel types and the drafts at which those vessels arrive. Figure 12 displays the fractional value of cargo moved through Portland, ME, and Los Angeles, CA, from 2012 through 2014 with respect to draft, as reported in Waterborne Commerce Statistics Data accessed via CPT. The volume of throughput is substantially larger at Los Angeles (60 million tons, annually) than at Portland, (11 million tons, annually). Los Angeles has an authorized entrance channel depth of 53 ft below MLLW but logged vessel arrivals with maximum drafts of 57 ft. Portland, with an authorized entrance channel depth of 45 ft below MLLW, logged vessel arrivals with maximum drafts of 52 ft during the study period.

Figure 12.Vessel traffic at Portland, ME, has a significant value of cargo moving with vessels at its deepest drafts. At Los Angeles, CA, the value of cargo transported at the deepest drafts reported in the harbor is marginal.
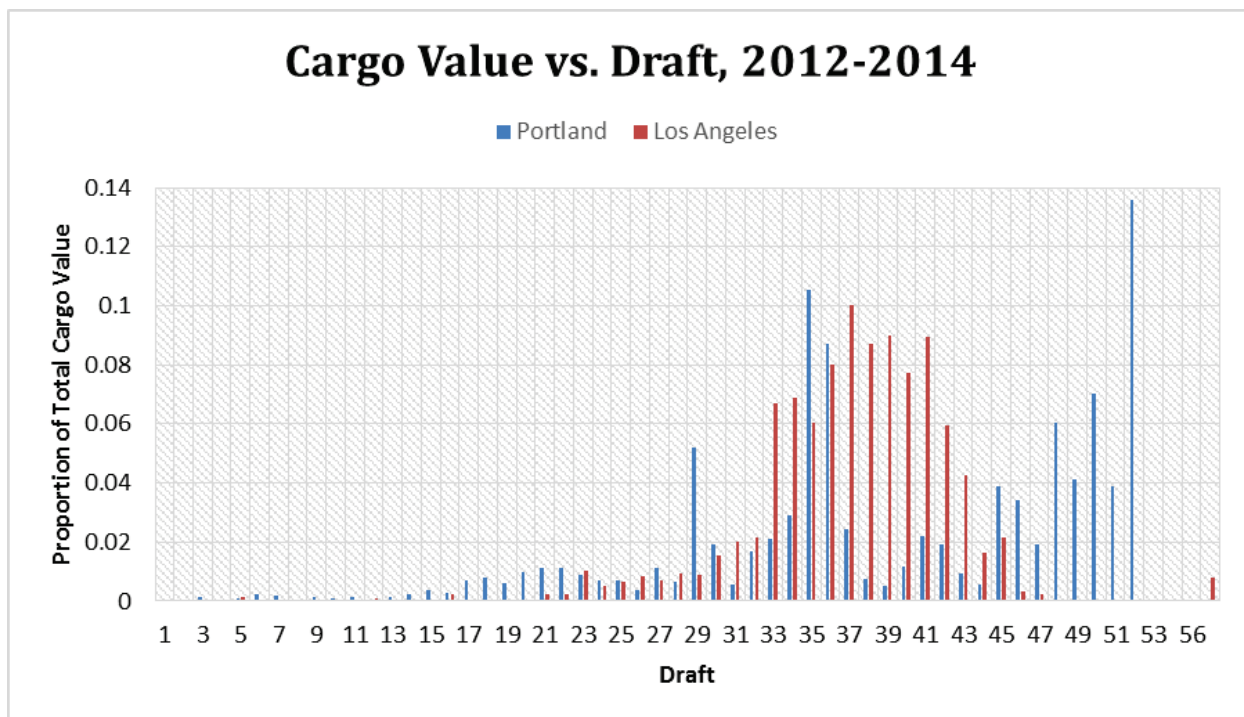
In both cases, commodity data include vessels with drafts greater than the respective authorized channel depths, indicating reliance on additional channel depth, very likely resulting from tidal water level fluctuations. The average range of tidal predictions for 2012–2014 was 8.88 ft in Los Angeles and 13.84 ft in Portland. In Los Angeles, additional depth from tide accounts for 16.8% of the authorized channel depth. In Portland, tidal depth provides an additional 30.8% beyond authorized depth.

The draft of shipments in excess of project depth, 4 ft at Los Angeles and 7 ft at Portland, represents 7.5% and 15.6% of authorized depth, respectively. The draft in excess of project depth represented 45% of the observed range of tidal predictions at Los Angeles and 51% at Portland.

Portland's cargo is predominantly bulk products (99% by tonnage, Figure 13) and is heavily weighted toward its deepest drafting vessels. Approximately 40% of cargo value moves at drafts larger than the authorized project depth, indicating that in all likelihood it transited when water levels were above MLLW. However, less than 1% of cargo value at Los Angeles, which is predominantly containerized products (77% by tonnage, Figure 14), moves on vessels with drafts larger than the authorized project depth. Based on AIS data, on average, 33% of traffic

moved above the 75th percentile predicted tidal elevation at Portland. At
Los Angeles, only 20% of traffic moved above the 75th percentile predicted
tidal elevation. While each port is using approximately half of the available
tidal depth, Portland's increased channel depth as a fraction of authorized
channel depth is approximately twice that of Los Angeles. The benefit of
using that additional depth is much higher, in tonnage and value terms at
Portland than at Los Angeles.

The preference for any tide stage may have multiple interpretations. For
example, the preference for higher tide elevations at Portland may reflect
opportunism on the part of vessel operations incented to land the
maximum draft possible there. Given that more than 50% of traffic in
Portland moves during mid-tide elevations, this interpretation seems more
likely than the alternative interpretation that bulk cargo vessel operators
might prefer to avoid tidal currents associated with mid-tide elevations. In
Los Angeles temporal clustering, low traffic density during high tide and
limited value of cargo moved at drafts in excess of authorized project
depth may mean that vessel schedule and crane productivity dominates
vessel arrival behavior with available water depth being generally less
important. However, detailed analysis of the motivating factors underlying
these general observations are beyond the scope of this investigation.

Figure 13.Portland, ME, cargo is predominantly bulk commodities. On average, nearly 14% of cargo moved at
52 ft of draft, the deepest recorded during this period.
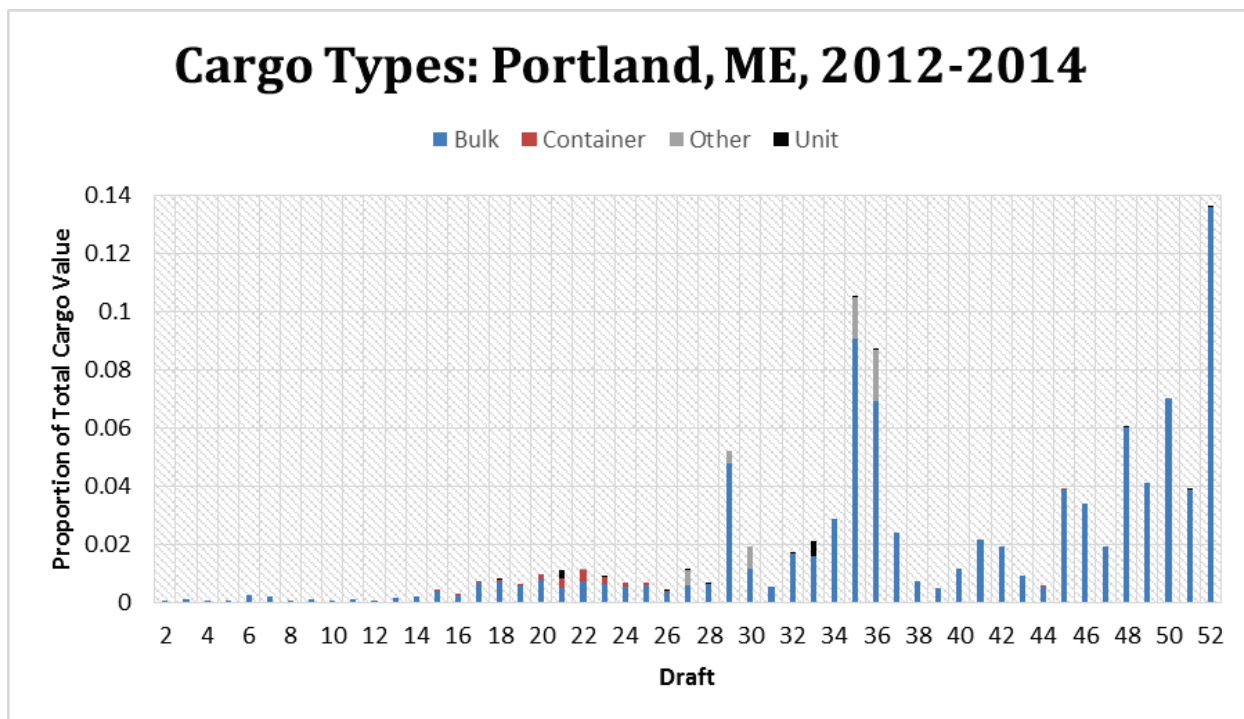
Figure 14. Los Angeles, CA, cargo is predominantly containerized. Approximately 1% of cargo on average moved at the deepest recorded draft of 57 ft during this period.
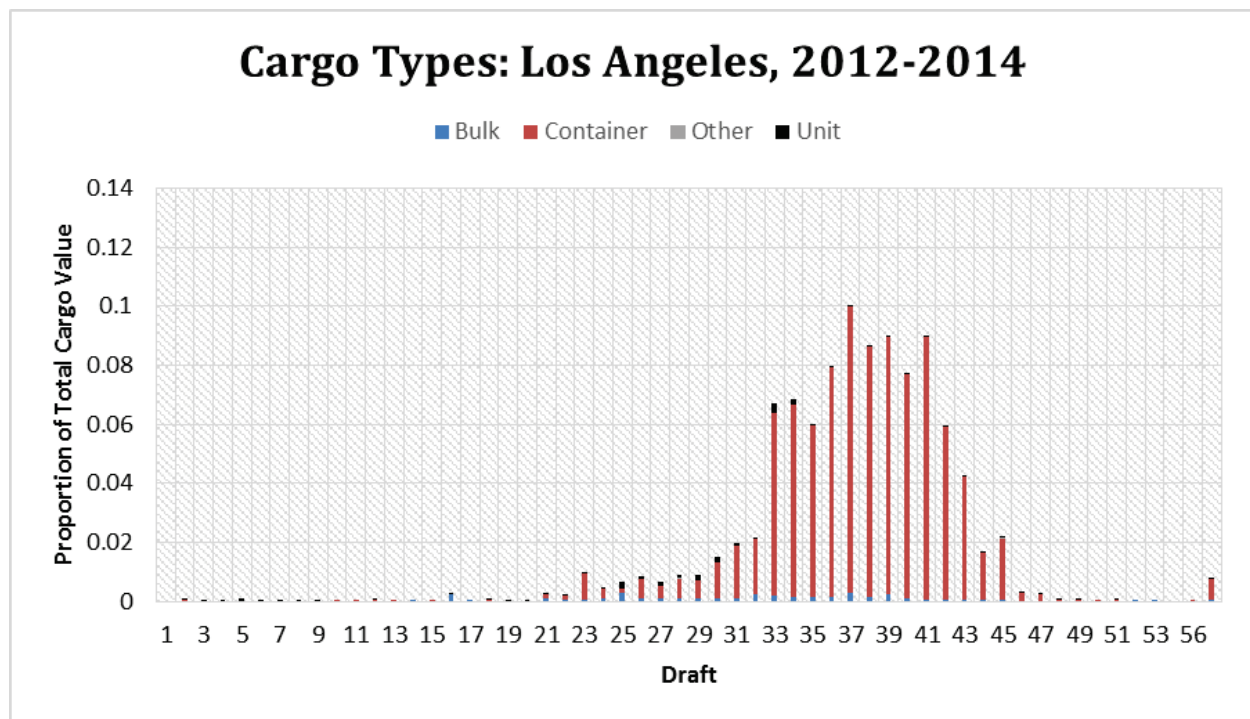
6   Conclusion

This investigation has identified AIS data as an information source valuable for collection of vessel-related movement information. Provided that vessels of interest can be validated through authoritative means, AIS provides a far-reaching remote-sensing platform that will enable practitioners to efficiently analyze vessels in transit. The high dimensionality of AIS data provides numerous methods for filtering data, making it possible to analyze vessel movements precisely at an unprecedented breadth of scope.

This investigation further demonstrated the TD metric methodology as a simple and intuitive measure of vessel performance within USACE-maintained navigation entrance channels when vessel TD imbalances are present. It provided a relative ranking of ports within the USACE navigation portfolio based on when vessels arrive with respect to predicted tidal elevation. When extreme (high or low) tidal preference is present but balanced, the traffic fractions T_{25}, T_{50}, T_{75}, are more informative.

The fusion of AIS data with tidal predictions demonstrates one of many potential analyses coupling vessel and environmental forcing data. AIS is an important data source to consider when investigating other navigation-related topics, especially when the behavior of vessels in transit is relevant to the problem under consideration.

Finally, the spatio-temporal nature and high granularity of AIS data make further integration of vessel transit information with commerce and channel condition data a worthwhile area for future research and development. In the case of Portland, ME, the highest observed TD value was associated with a substantial value of port cargo being moved at vessel drafts in excess of authorized channel depths. In Los Angeles, the lowest observed TD value was associated with temporally clustered vessel arrivals. While both observations are interesting in their own right, it was demonstrated that AIS analysis methods serve to complement existing tools, such as CPT, in providing USACE practitioners with richly detailed information that helps to complete the picture of navigation operations and that may assist waterway managers in making complex channel design and maintenance decisions.

References

Briggs, M. J., S. T. Maynord, C. R. Nickles, and T. N. Waller. 2004. *Charleston harbor ship motion data collection and squat analysis.* ERDC/CHL CHETN-IX-14. Vicksburg, MS: U.S. Army Engineer Research and Development Center.

Harati-Mokhtari, A., A. Wall, P. Brooks, and J. Wang. 2007 Automatic identification system (AIS): Data reliability and human error implications. *The Journal of Navigation* 60: 373–389. doi:10.1017/S0373463307004298

International Telecommunication Union (ITU). 2014. *Technical characteristics for an automatic identification system using time-division multiple access in the VHF maritime mobile band.* ITU-R M.1371.5. Geneva, Switzerland.

Maynord, S. T. 2007. *Ship forces on the shoreline of the Savannah Harbor project.* ERDC/CHL TR-07-7. Vicksburg, MS: U.S. Army Engineer Research and Development Center. http://acwc.sdp.sirsi.net/client/search/asset/1000785

McKinney, W. 2012. *Python for data analysis.* Sebastopol, CA: O'Reilly Media, Inc.

Mitchell, K. N. April. 2012. *A review of coastal navigation asset management efforts within the coastal inlets research program (CIRP) part 2: The channel portfolio tool.* ERDC/CHL CHETN-IX-29. Vicksburg, MS: U.S. Army Engineer Research and Development Center. http://acwc.sdp.sirsi.net/client/search/asset/1006662

Mitchell, K. N., and B. M. Scully. 2014. Waterway performance monitoring via automatic identification system (AIS) data. *Transportation Research Record: Journal of the Transportation Research Board* 2426: 20–26.

National Oceanic and Atmospheric Administration (NOAA). 2013a. Station selection – NOAA tides and currents. http://tidesandcurrents.noaa.gov/stations.html?type=Water+Levels

NOAA. 2013b. FAQ – Tide predictions and data – NOAA tides and currents. http://www.co-ops.nos.noaa.gov/faq2.html#27

Scully, B. M., and K. N. Mitchell. 2013. AIS history and future improvements in waterway management. In *Proceedings of the conference, "PORTS 2013,"* Seattle, WA, August 2013.

Scully, B., and K. N. Mitchell. 2015. *Archival automatic identification system (AIS) data for navigation project performance evaluation.* ERDC/CHL CHETN-IX-40. Vicksburg, MS: U.S. Army Engineer Research and Development Center. http://chl.erdc.usace.army.mil/chetn

U.S. Army Corps of Engineers (USACE). 2006. *Hydraulic design of deep-draft navigation projects.* EM 1110-2-1613. Washington, DC: U.S. Army Corps of Engineers.

van Rossum, G., and F. L. Drake, eds. 2001. *Python reference manual.* Virginia: PythonLabs. https://docs.python.org/2.0/ref/ref.html

Winkler, M. F., R. T. Wooley, and B. C. Barker. 2003. *Monitoring navigation using time-lapse video recorders*. ERDC/CHL CHETN-IX-13. Vicksburg, MS: U.S. Army Engineer Research and Development Center. http://acwc.sdp.sirsi.net/client/search/asset/1000473

Appendix A: Port Reference Lines

Anacortes

Legend
- ⭐ Port of Interest
- 🔺 NOAA Tide Station
- — Observation Reference

Anacortes, WA

Port Townsend, WA

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors

Port of Interest:	**Anacortes, WA**
Tide Station Number:	9444900

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	13.13	3.13	7.11	0.19	0.41	0.40	0.52	358
2013	13.01	3.20	7.04	0.24	0.48	0.28	0.08	513
2014	12.79	3.23	7.01	0.22	0.50	0.28	0.11	549

Tide Cycle, NOAA Station 9444900, January 1, 2012

Vessel Call Frequency, Anacortes, WA, 2012
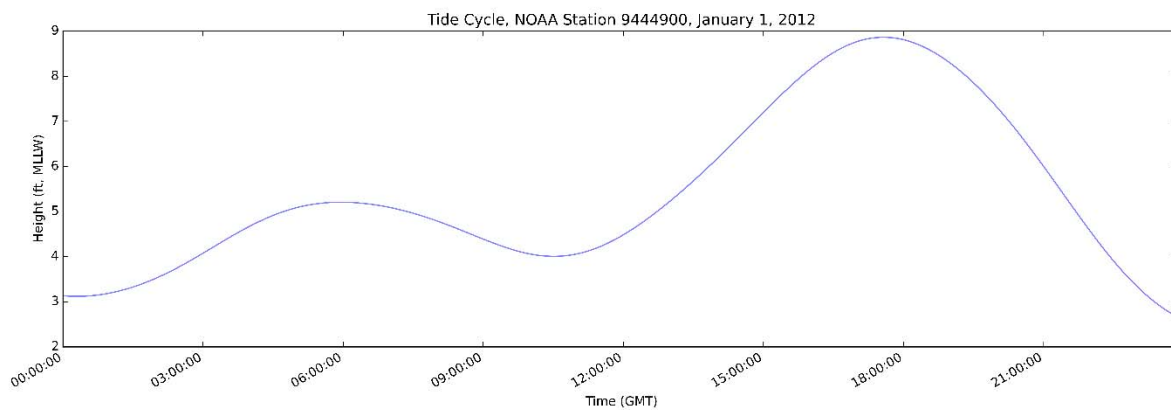
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	6	3	2	6	2	2	0	1	1	2	2	2	0	2	0	1	2	2	3	2	2	6	2	2
TUE	1	4	3	1	4	3	4	1	1	2	3	0	2	2	2	1	7	6	2	2	5	4	3	0
WED	2	0	2	1	0	0	0	6	0	1	0	3	3	1	2	1	2	1	8	7	2	6	2	3
THU	0	2	0	0	5	2	1	1	1	1	1	0	0	1	0	1	1	3	4	3	2	4	4	3
FRI	6	1	2	2	2	2	2	2	1	3	3	2	3	2	2	2	2	2	10	6	2	1	3	2
SAT	3	1	3	1	3	0	1	4	0	0	2	0	0	0	0	3	2	4	1	1	3	3	2	2
SUN	0	4	1	2	1	2	1	0	0	2	0	2	0	4	0	2	3	4	2	3	2	5	5	0

Hour (UTC)

Vessel Call Frequency, Anacortes, WA, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	3	1	2	2	1	1	3	2	1	0	1	3	1	1	3	0	8	15	6	3	2	8	7	4
TUE	2	7	3	4	4	1	0	4	4	1	0	1	0	0	1	3	7	5	6	4	9	6	5	4
WED	6	4	2	2	2	3	1	3	1	3	2	2	0	0	2	2	6	18	8	15	6	7	5	8
THU	4	4	5	2	1	1	3	0	4	1	0	2	0	0	1	0	1	6	5	10	5	5	4	3
FRI	8	11	3	1	5	1	0	3	0	1	2	5	0	1	1	1	2	16	11	14	3	7	7	4
SAT	5	7	1	1	1	3	3	1	0	1	0	2	1	0	2	0	3	1	2	3	3	4	1	1
SUN	3	0	1	0	1	1	0	1	1	2	1	1	1	2	1	1	0	2	3	0	2	0	0	2

Hour (UTC)

Vessel Call Frequency, Anacortes, WA, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	0	1	1	1	1	2	0	3	2	3	0	2	2	1	1	1	7	22	10	10	9	3	7	4
TUE	1	3	5	7	4	2	6	1	1	2	0	1	0	0	2	3	5	5	9	3	8	8	6	6
WED	4	3	2	4	3	2	2	1	2	0	1	2	3	0	4	4	3	19	11	11	9	6	6	11
THU	6	2	4	3	1	3	1	3	2	1	0	1	2	2	2	3	5	4	10	7	3	7	7	4
FRI	8	6	3	1	4	1	5	0	0	1	1	0	0	1	5	1	5	14	9	11	7	7	7	1
SAT	3	0	1	2	2	0	2	1	1	2	0	0	0	0	0	2	4	4	3	2	1	1	2	5
SUN	2	1	3	2	2	0	0	2	0	0	1	0	2	1	0	0	4	4	3	3	1	0	4	1

Hour (UTC)

Anacortes, WA Interarrival Times
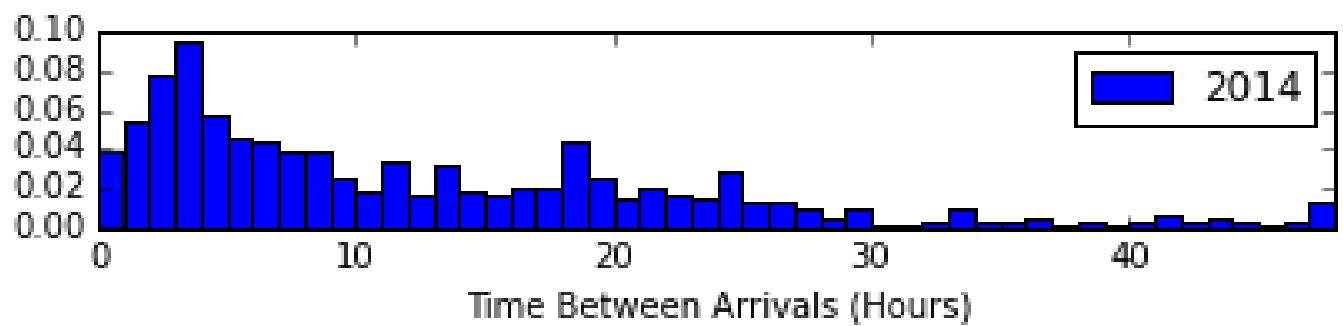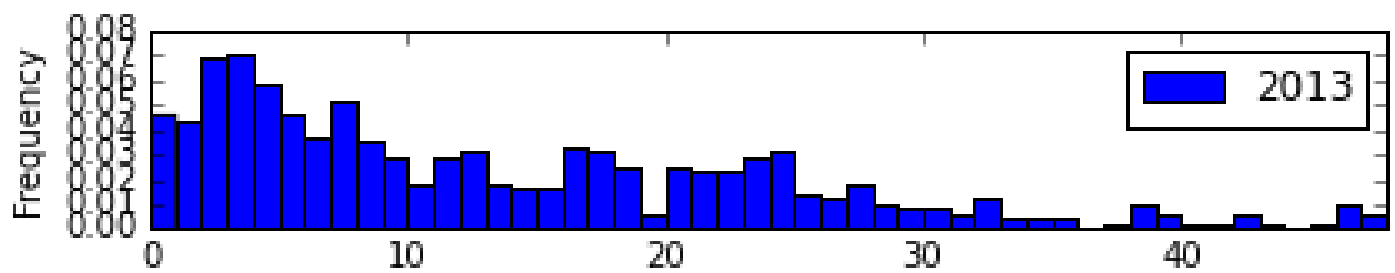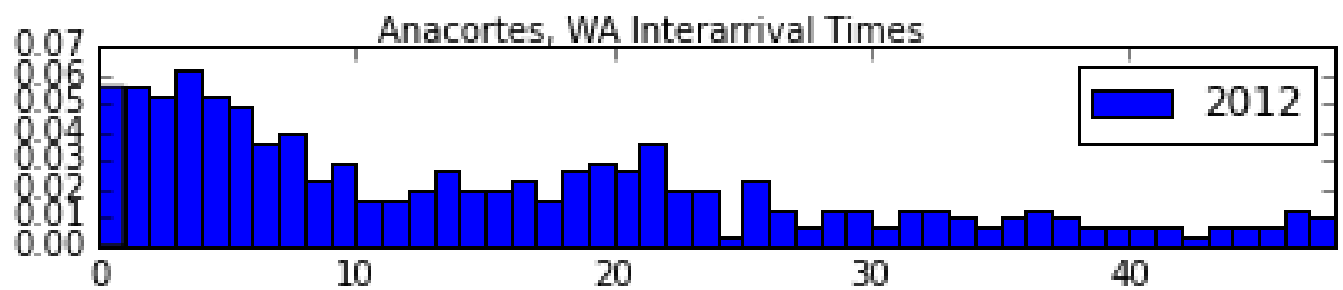
Anacortes, WA Vessel Arrival Water Surface Elevation
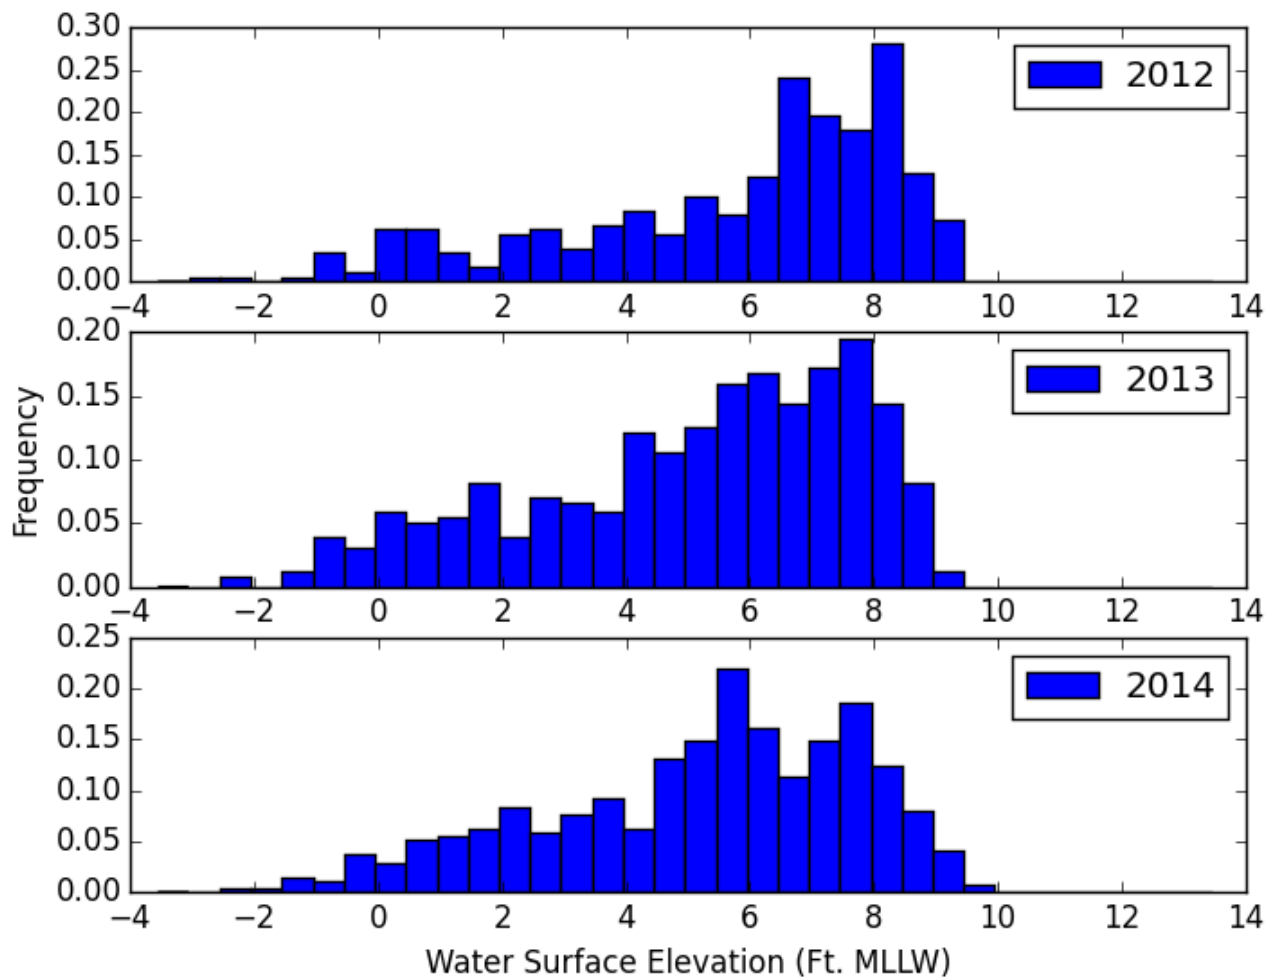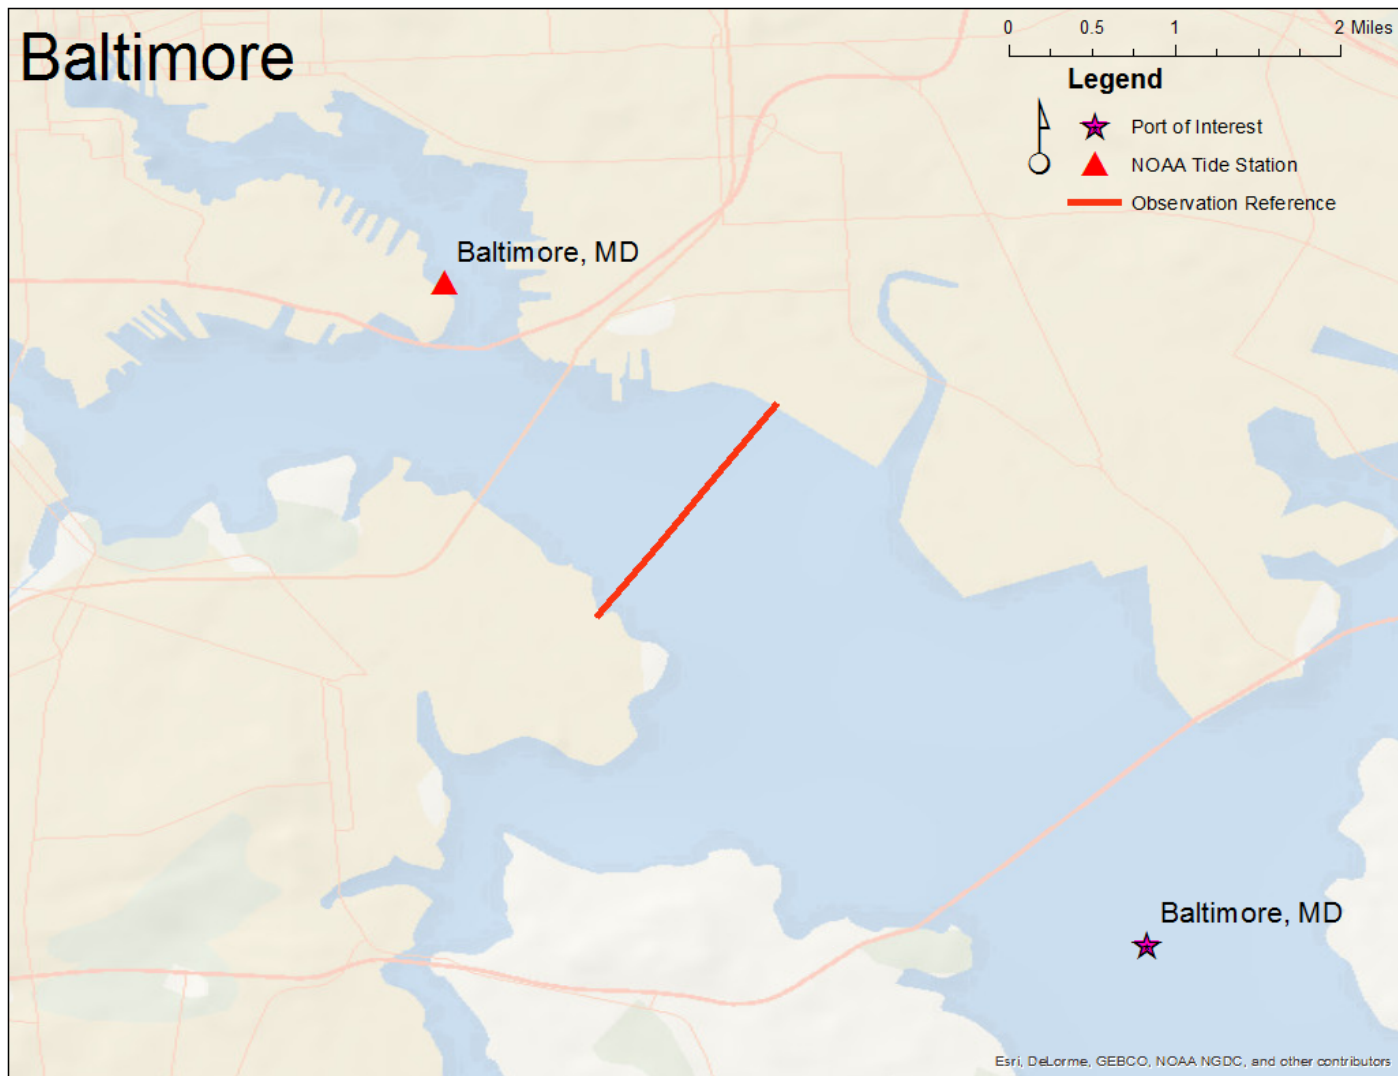
Baltimore

Port of Interest: Baltimore, MD
Tide Station Number: 8574680

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	2.72	0.43	1.16	0.28	0.46	0.26	-0.04	872
2013	2.75	0.43	1.17	0.24	0.50	0.26	0.04	936
2014	2.67	0.43	1.17	0.24	0.49	0.27	0.05	1052

Vessel Call Frequency, Baltimore, MD, 2012
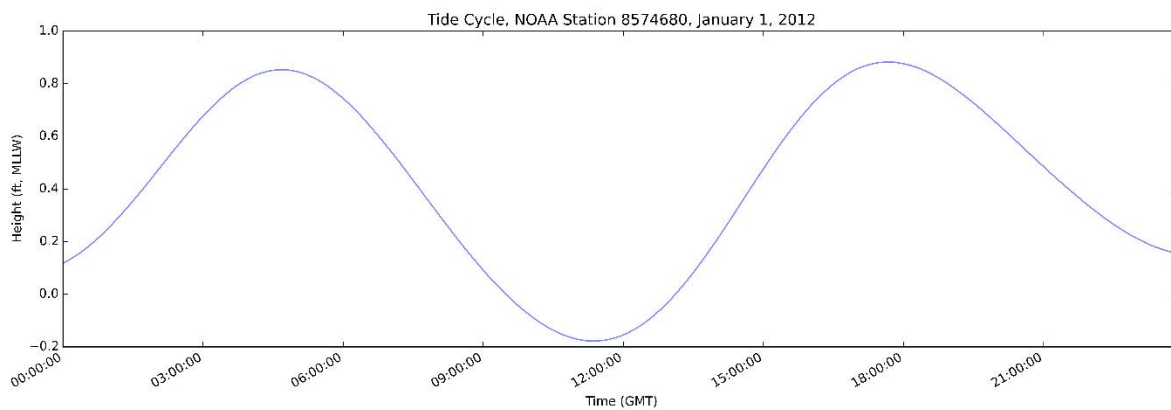
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	2	2	4	5	3	4	4	6	13	11	5	4	1	4	5	2	4	3	4	3	3	6	11	7
TUE	3	7	7	4	7	5	8	6	10	3	3	7	5	2	6	5	5	5	4	2	5	5	7	12
WED	4	4	5	4	4	4	4	8	15	11	10	9	4	7	2	4	4	4	3	6	0	6	8	8
THU	11	1	12	4	7	9	4	5	15	11	12	7	7	7	1	1	4	4	4	3	5	7	7	6
FRI	6	0	4	7	1	6	7	6	12	9	5	4	4	3	4	6	3	7	3	2	3	8	9	5
SAT	5	7	3	4	2	3	3	1	7	7	6	3	3	4	4	4	4	4	3	7	5	2	2	
SUN	2	0	5	6	13	5	3	3	3	8	10	0	4	7	4	3	3	2	5	4	2	7	8	3

Hour (UTC)

Vessel Call Frequency, Baltimore, MD, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	6	6	2	2	3	1	3	4	10	16	9	3	1	4	2	5	5	2	4	3	4	10	18	15
TUE	10	3	5	4	2	5	9	4	9	9	7	4	5	2	5	4	6	2	3	4	3	10	7	8
WED	6	6	8	9	6	7	6	4	9	14	13	5	5	3	5	5	2	6	1	2	2	7	11	11
THU	9	4	8	11	15	9	10	3	9	9	10	10	4	3	4	6	6	1	2	1	11	16	7	12
FRI	8	6	4	3	1	4	2	8	11	6	4	8	6	3	1	1	5	3	3	3	1	8	9	14
SAT	6	3	6	9	8	5	1	5	8	5	12	4	4	1	2	1	3	3	4	6	2	6	6	5
SUN	3	3	4	2	5	3	2	3	8	4	8	3	2	3	3	2	1	3	3	8	5	9	6	5

Hour (UTC)

Vessel Call Frequency, Baltimore, MD, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	9	5	2	1	6	2	3	7	14	16	9	2	5	3	6	7	3	6	2	5	5	5	8	12
TUE	5	6	2	8	6	3	5	7	10	14	11	5	6	2	1	4	3	5	4	4	6	7	14	10
WED	9	9	8	6	14	5	3	9	5	15	13	4	7	4	4	1	8	5	5	1	4	5	6	20
THU	9	13	5	7	7	14	4	8	9	12	17	10	3	5	5	6	5	8	6	2	6	7	11	7
FRI	7	8	3	7	8	8	4	11	15	14	13	5	7	4	0	2	4	2	3	2	6	11	10	10
SAT	9	1	4	9	3	7	6	2	10	10	8	1	4	4	2	3	1	5	6	6	2	7	4	9
SUN	10	0	9	4	3	3	2	5	5	5	8	7	4	2	0	2	5	0	3	7	5	6	12	11

Hour (UTC)

Baltimore, MD Interarrival Times
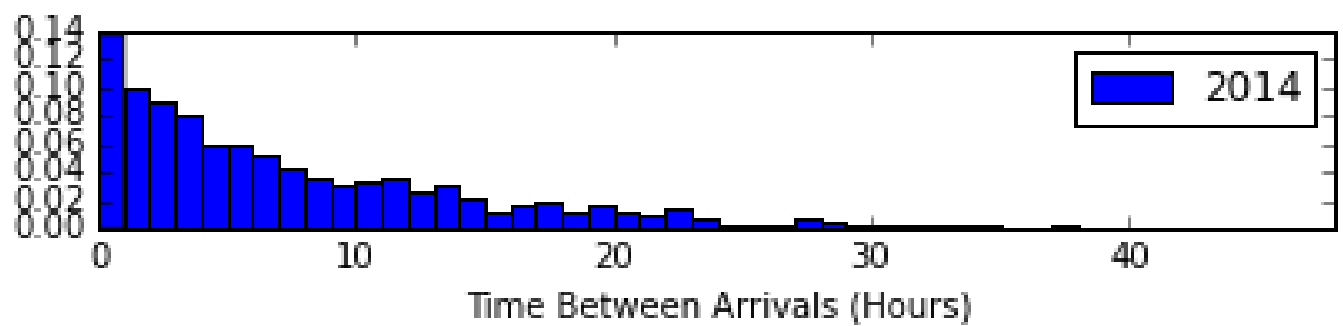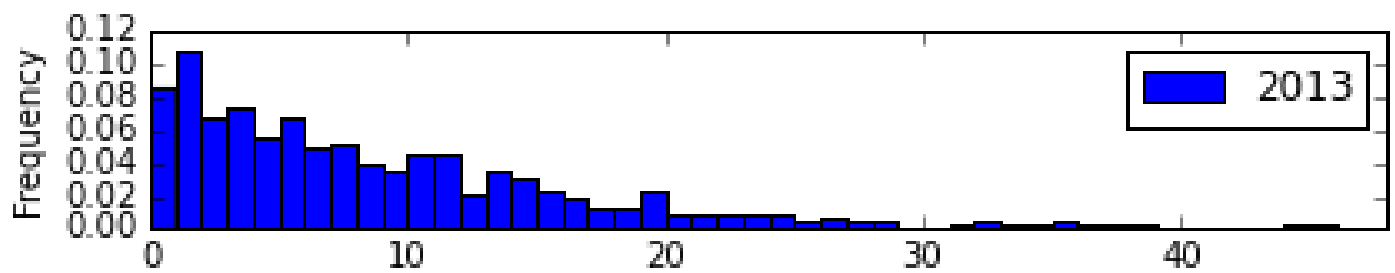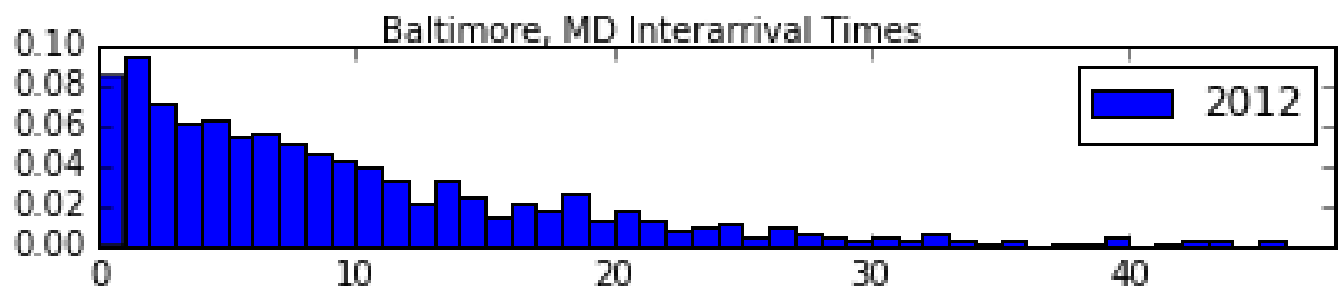
Baltimore, MD Vessel Arrival Water Surface Elevation

Boston

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors

Legend

⭐ Port of Interest
🔺 NOAA Tide Station
▬▬ Observation Reference
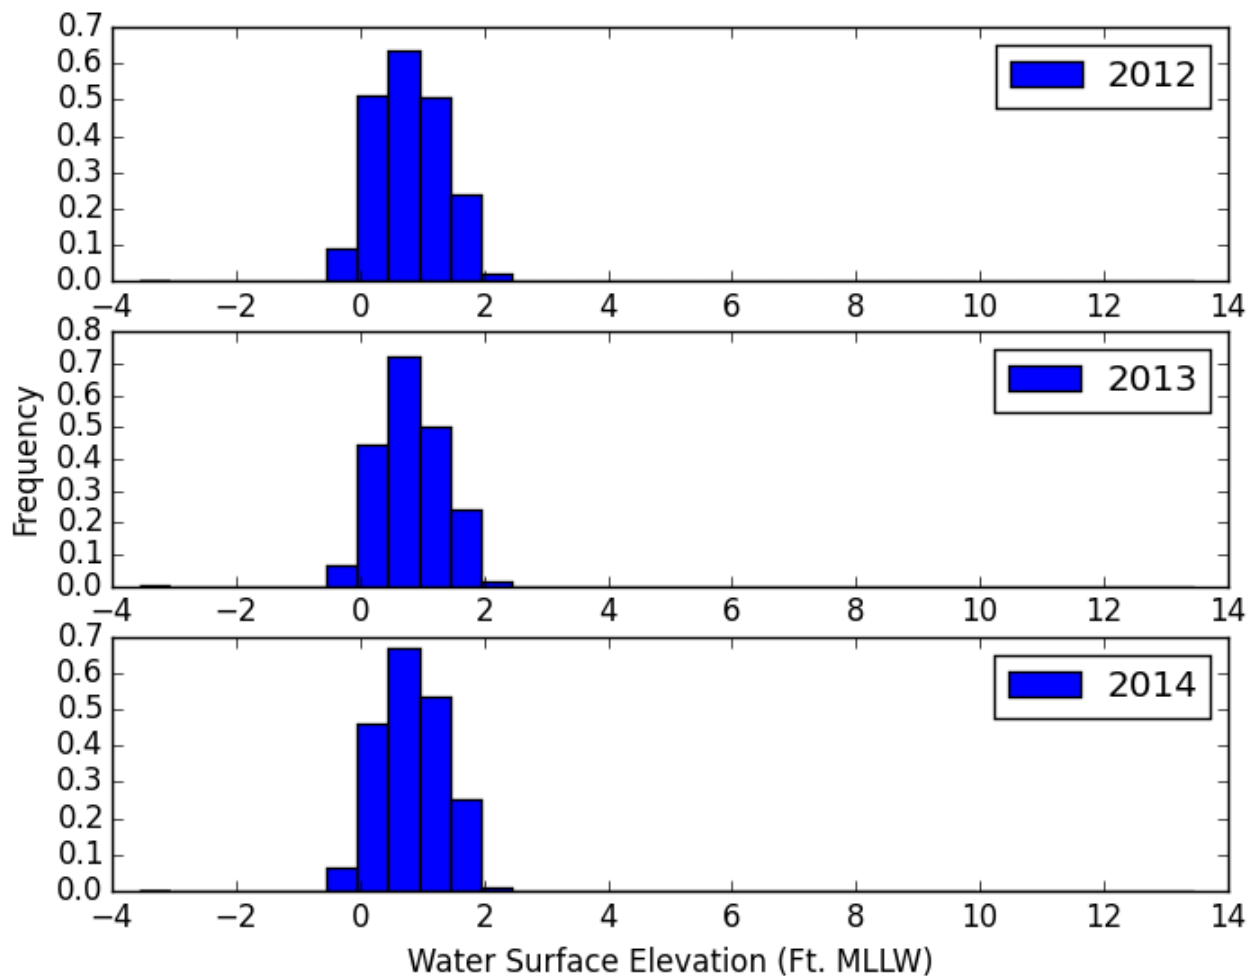
Port of Interest:	**Boston, MA**
Tide Station Number:	8443970

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	14.49	2.03	8.36	0.14	0.59	0.27	0.23	732
2013	14.31	1.99	8.41	0.18	0.55	0.27	0.16	697
2014	14.49	1.95	8.46	0.15	0.56	0.29	0.25	727

Tide Cycle, NOAA Station 8443970, January 1, 2012

Vessel Call Frequency, Boston, MA, 2012
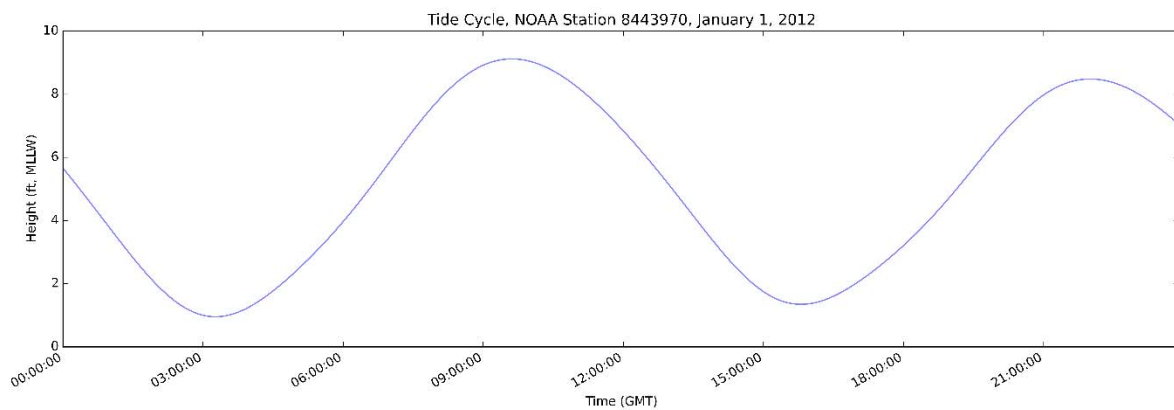
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	4	0	1	4	2	5	1	1	8	8	4	5	5	7	9	3	9	5	1	2	1	3	1	3
TUE	1	6	2	2	2	0	1	6	10	13	7	5	4	4	3	4	4	2	7	3	7	2	2	3
WED	1	1	2	2	3	1	1	2	6	9	10	4	5	4	5	5	5	4	3	7	7	3	4	4
THU	2	2	4	1	2	3	3	4	11	11	12	8	4	8	1	2	4	5	7	3	5	2	9	3
FRI	5	7	2	8	1	3	2	3	11	9	13	8	3	9	7	5	9	6	1	6	4	4	5	2
SAT	5	1	3	6	4	4	1	7	7	8	2	6	7	4	4	4	3	2	3	4	3	3	3	3
SUN	0	3	1	4	0	2	1	3	2	11	8	8	2	11	9	3	8	6	3	2	2	1	3	3

Hour (UTC)

Vessel Call Frequency, Boston, MA, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	0	1	1	1	0	1	0	0	3	12	8	5	7	8	6	6	3	1	3	7	3	2	2	7
TUE	3	1	1	1	1	1	0	1	6	12	6	7	3	9	10	5	2	5	1	4	2	0	4	3
WED	0	6	1	4	2	1	2	4	5	10	13	10	7	8	8	9	4	4	6	5	4	6	2	3
THU	2	3	5	1	2	2	4	3	7	23	11	8	7	6	6	8	5	4	0	3	2	3	3	6
FRI	4	5	7	4	4	3	4	6	6	7	12	11	6	5	4	8	2	3	0	3	2	2	4	0
SAT	1	2	6	2	2	0	0	4	7	9	10	7	4	5	2	4	6	5	3	4	2	2	2	1
SUN	1	3	1	0	2	2	2	1	4	4	2	5	7	1	5	3	5	5	3	2	9	2	3	0

Hour (UTC)

Vessel Call Frequency, Boston, MA, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	2	2	5	3	2	0	4	0	11	13	9	6	6	7	8	5	5	1	6	3	7	1	3	3
TUE	2	2	2	1	4	2	5	3	7	14	5	10	7	6	9	3	6	8	5	5	3	2	4	1
WED	1	2	2	2	0	3	1	2	7	9	7	6	7	2	5	3	6	3	2	1	8	2	3	1
THU	1	1	5	3	3	2	2	1	4	13	6	2	10	14	2	4	3	8	5	2	3	6	4	5
FRI	4	5	4	6	2	2	1	4	6	15	7	10	5	5	4	5	6	7	5	2	5	3	2	2
SAT	4	3	3	2	1	2	2	1	5	12	7	6	7	8	3	6	6	4	5	3	4	5	1	3
SUN	1	0	4	1	3	0	2	5	5	7	7	10	8	8	5	3	5	2	3	0	2	0	3	1

Hour (UTC)

Boston, MA Interarrival Times
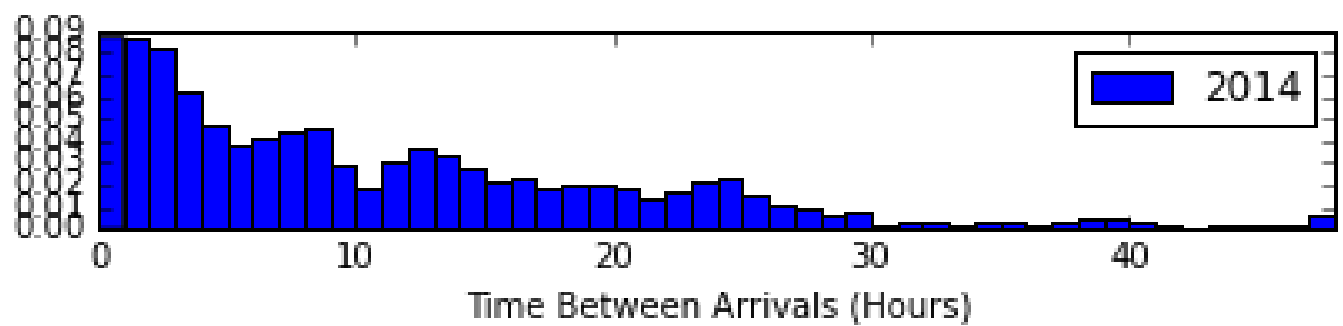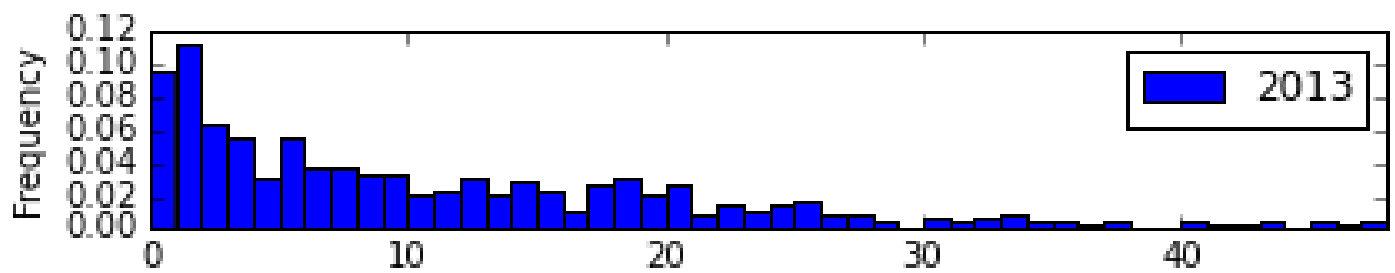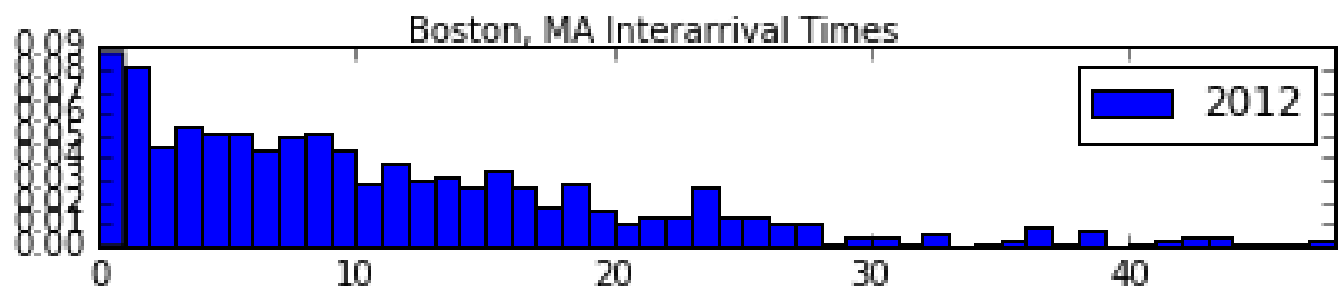
Boston, MA Vessel Arrival Water Surface Elevation

Charleston

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors

Legend
- ★ Port of Interest
- ▲ NOAA Tide Station
- ▬ Observation Reference
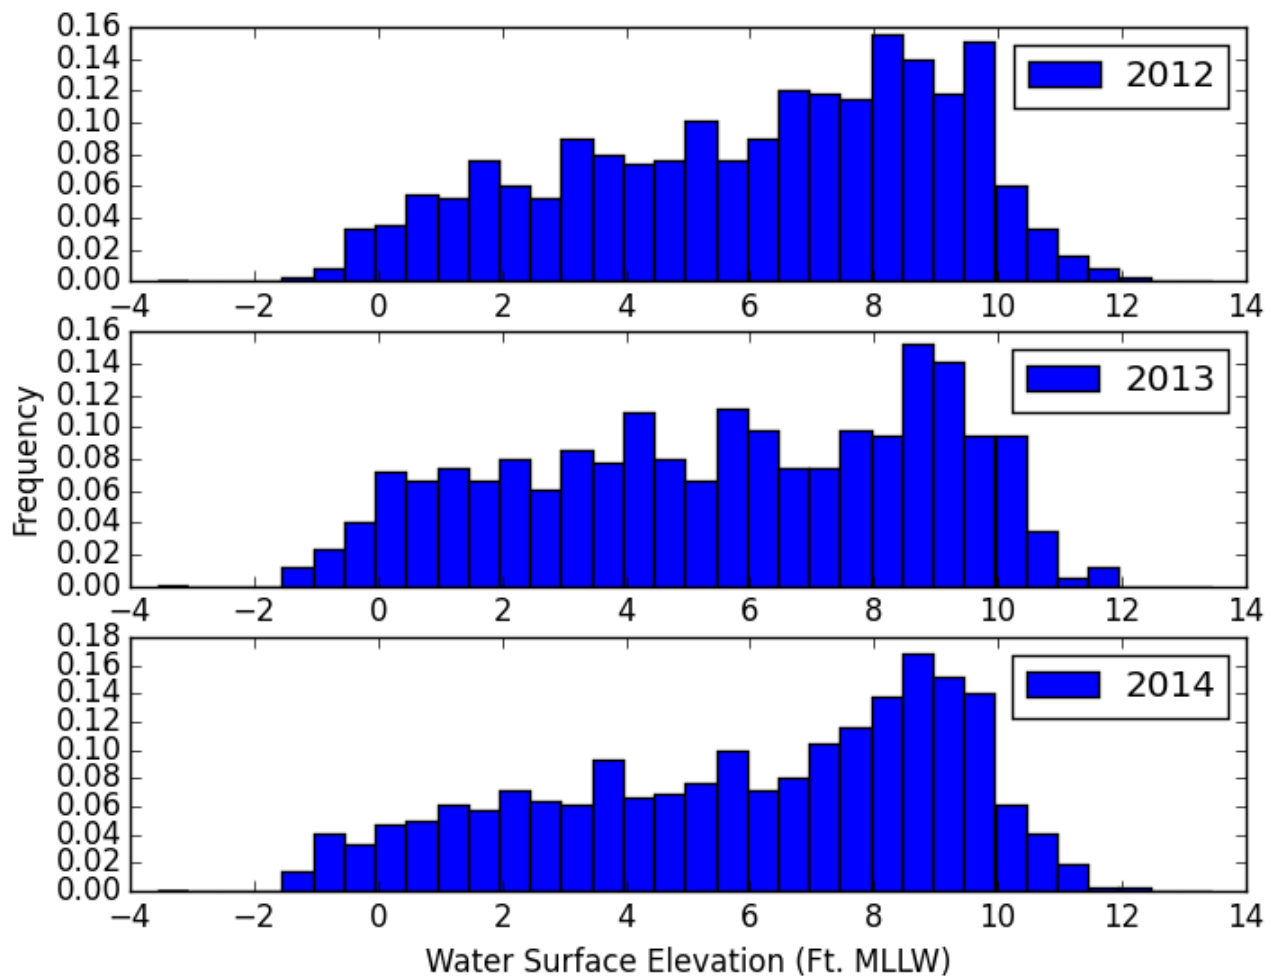
Port of Interest:	Charleston, SC
Tide Station Number:	8665530

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	8.24	1.13	4.66	0.25	0.48	0.27	0.05	1992
2013	8.17	1.12	4.69	0.26	0.50	0.24	-0.04	1854
2014	8.46	1.10	4.71	0.25	0.49	0.25	0.01	2087

Tide Cycle, NOAA Station 8665530, January 1, 2012

Vessel Call Frequency, Charleston, SC, 2012
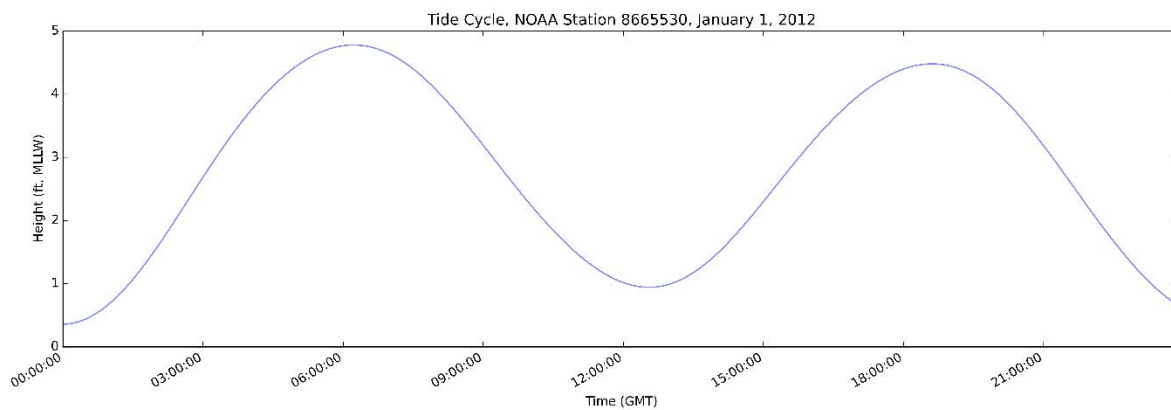
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	7	6	4	3	5	9	12	15	24	25	26	10	12	13	9	8	7	6	4	6	8	9	9	9
TUE	3	5	3	3	3	1	1	9	27	54	33	23	5	8	13	12	7	4	6	4	11	17	11	12
WED	5	5	5	8	4	8	4	6	24	44	30	15	7	17	20	16	6	12	9	10	13	25	19	21
THU	15	9	4	7	11	9	3	10	26	42	27	18	8	8	10	6	7	3	6	8	12	11	18	15
FRI	21	8	8	6	9	6	7	21	38	38	32	21	14	13	20	12	10	6	4	8	16	21	22	22
SAT	15	9	8	6	5	3	7	21	20	17	19	14	12	11	14	12	11	9	9	11	14	9	10	6
SUN	7	4	6	6	3	2	8	8	11	18	15	6	5	5	17	8	9	4	7	5	4	9	12	11

Hour (UTC)

Vessel Call Frequency, Charleston, SC, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	7	3	6	2	2	2	8	22	33	24	11	10	10	14	3	3	3	4	6	14	12	9	6
TUE	9	5	5	5	3	3	4	5	22	48	32	12	7	5	16	14	9	4	3	0	13	12	12	5
WED	2	6	2	4	5	3	5	3	18	43	30	13	12	14	11	27	12	11	8	18	12	22	21	13
THU	9	5	2	4	10	1	7	6	21	32	15	12	15	9	19	15	12	7	5	7	12	19	6	12
FRI	8	11	2	4	7	7	5	17	32	58	32	20	12	8	8	12	11	5	10	7	16	22	16	16
SAT	10	3	3	3	1	5	8	14	27	23	16	11	7	14	11	14	4	5	3	5	11	12	8	6
SUN	5	10	9	4	6	4	6	12	24	27	19	9	12	11	13	8	6	5	4	6	8	13	9	5

Hour (UTC)

Vessel Call Frequency, Charleston, SC, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	13	1	0	5	3	5	7	16	45	29	11	10	15	12	8	7	6	7	7	12	17	11	6
TUE	14	5	10	5	5	3	4	12	40	52	27	11	7	13	20	12	20	6	4	4	21	7	17	12
WED	10	14	7	9	8	2	6	10	17	21	14	8	11	11	23	8	7	8	1	13	19	20	8	5
THU	13	4	6	5	2	6	5	11	22	32	38	19	11	17	23	14	10	8	9	15	17	15	20	17
FRI	11	16	10	8	6	5	9	25	33	45	32	13	14	20	28	20	7	6	6	8	14	20	20	17
SAT	11	14	10	6	7	7	8	13	22	19	18	14	17	9	17	12	7	4	12	7	9	12	8	7
SUN	11	5	1	1	3	2	4	14	17	36	16	10	7	13	11	13	7	5	5	7	13	12	8	12

Hour (UTC)

Charleston, SC Interarrival Times
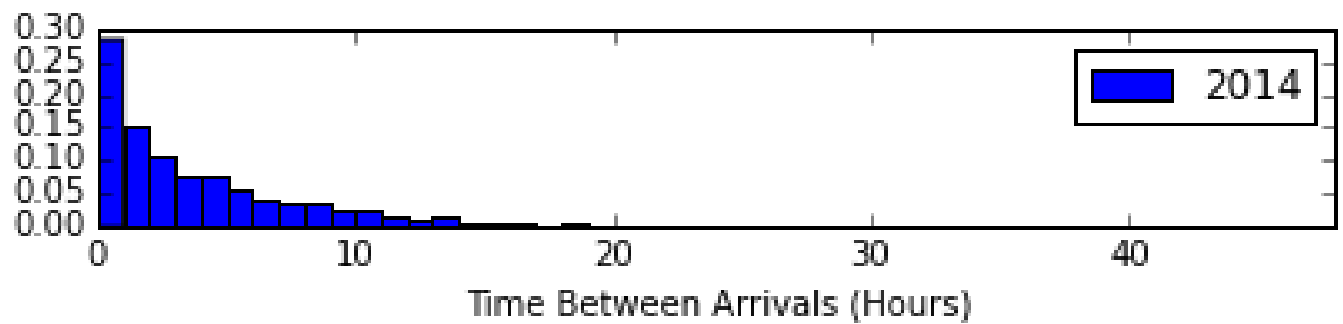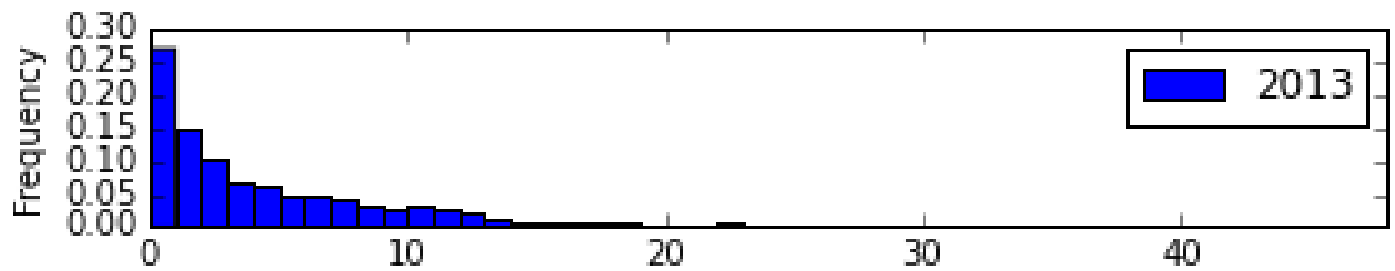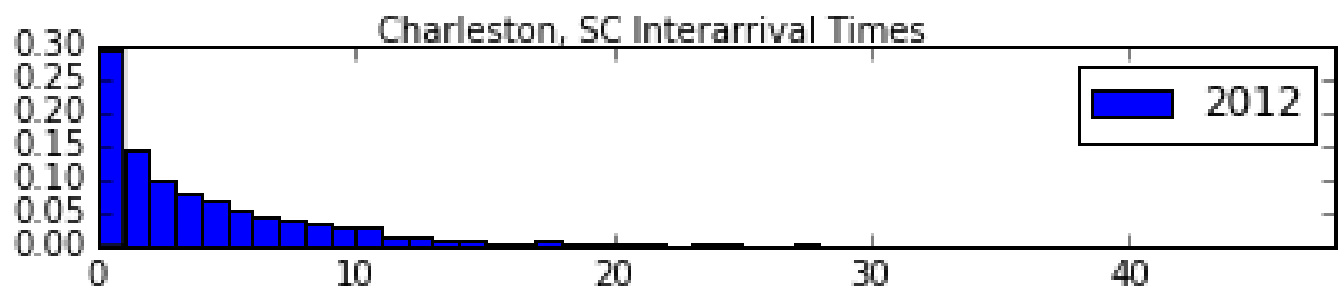
Charleston, SC Vessel Arrival Water Surface Elevation

Columbia River

Astoria, OR
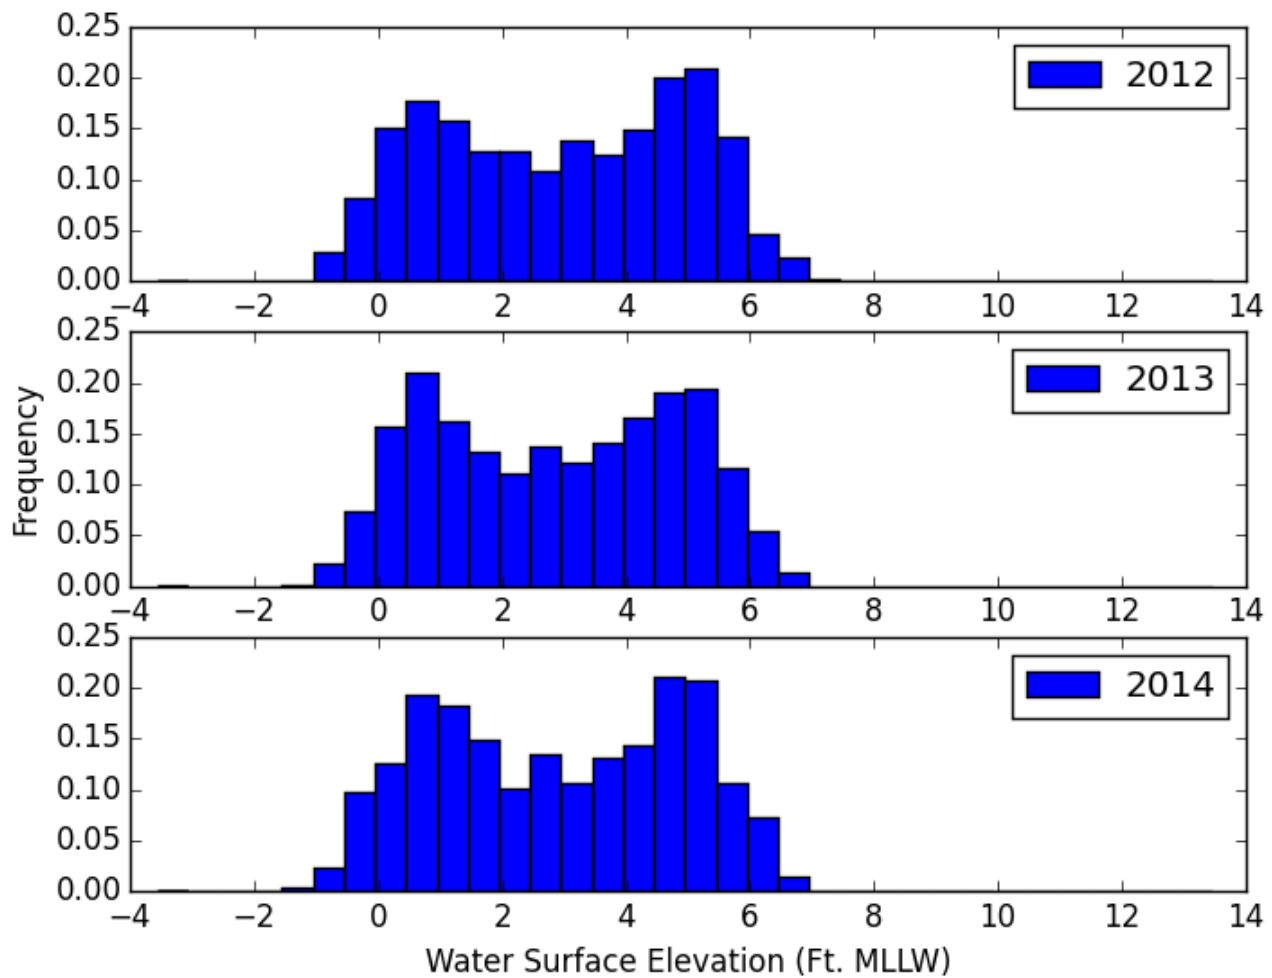
Port of Interest: Columbia River, OR

Tide Station Number: 9439040

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	12.53	2.43	6.73	0.25	0.53	0.23	-0.04	1661
2013	12.41	2.42	6.73	0.24	0.50	0.25	0.02	1674
2014	12.44	2.41	6.75	0.24	0.52	0.24	0.00	1382

Tide Cycle, NOAA Station 9439040, January 1, 2012

Vessel Call Frequency, Columbia River, OR, 2012
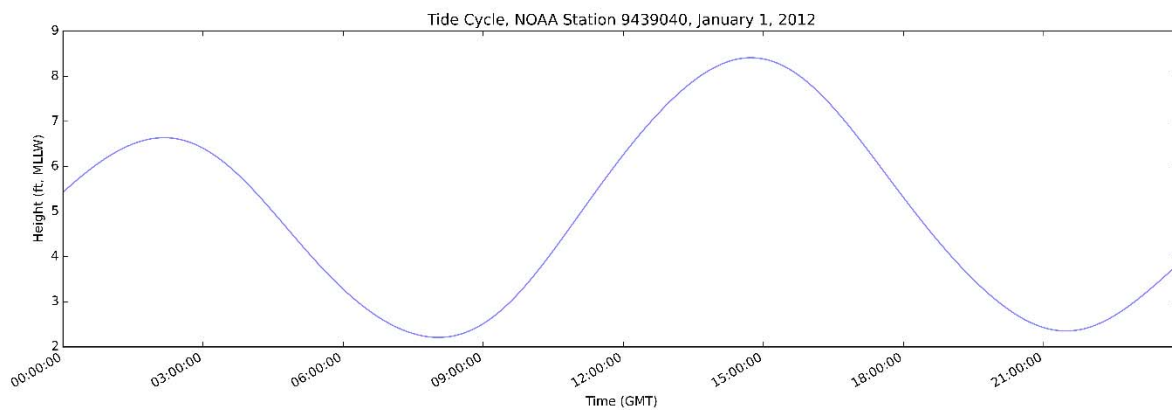
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	12	18	10	13	14	8	5	10	6	7	5	5	7	7	13	16	17	16	11	9	12	14	6	11
TUE	5	11	14	13	5	6	8	7	12	5	5	7	12	10	17	8	12	16	13	16	15	16	13	12
WED	10	8	9	11	6	6	13	7	7	3	5	15	5	7	11	10	12	11	11	12	9	6	6	2
THU	6	10	6	8	6	8	6	9	9	6	3	5	10	12	8	8	17	14	17	14	12	8	12	12
FRI	13	4	15	10	11	8	11	7	12	6	5	11	7	10	14	13	14	15	8	7	11	10	8	5
SAT	15	9	12	9	15	13	13	14	3	6	12	9	3	10	20	17	10	6	10	12	11	10	12	12
SUN	8	8	6	9	9	11	10	10	7	6	7	8	4	7	10	19	16	9	15	13	11	4	11	7

Hour (UTC)

Vessel Call Frequency, Columbia River, OR, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	10	6	9	13	6	13	8	4	8	4	6	12	11	6	19	17	17	9	15	13	9	15	10	7
TUE	6	8	5	9	12	7	8	9	13	12	6	6	5	8	15	13	13	15	13	9	10	10	7	12
WED	10	2	10	11	11	8	7	7	4	1	8	9	6	13	5	11	14	6	10	17	9	13	5	11
THU	8	10	8	8	10	12	6	5	13	6	7	9	6	6	13	16	11	9	16	15	9	7	7	10
FRI	7	7	10	4	6	10	9	7	11	7	7	9	7	5	14	10	11	8	10	13	15	10	8	14
SAT	9	9	13	14	12	20	15	10	11	10	9	7	16	12	16	11	12	17	18	12	8	15	12	14
SUN	14	8	8	9	10	11	13	8	5	7	6	5	8	8	12	16	9	14	8	11	15	8	13	14

Hour (UTC)

Vessel Call Frequency, Columbia River, OR, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	9	13	6	4	13	16	10	9	8	4	6	4	7	7	11	6	11	12	16	10	13	7	11	8
TUE	10	9	10	5	12	2	7	5	8	5	4	3	4	8	9	8	11	6	9	10	13	12	8	13
WED	10	10	7	8	5	7	4	5	9	3	4	7	4	8	13	10	13	15	6	18	5	7	6	9
THU	5	4	6	6	6	10	10	13	9	11	4	10	7	3	10	4	7	8	8	13	7	11	9	9
FRI	8	7	6	6	7	5	8	6	2	8	3	9	4	8	8	9	8	10	9	13	6	9	15	7
SAT	4	9	5	6	11	6	8	8	5	6	4	7	4	3	8	19	13	7	11	14	9	10	9	7
SUN	5	6	3	12	9	9	11	6	4	5	4	5	8	10	9	9	9	13	10	17	15	10	13	11

Hour (UTC)
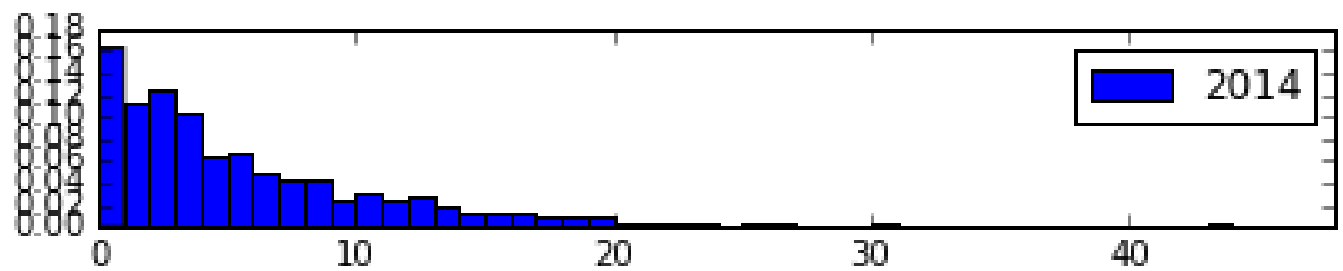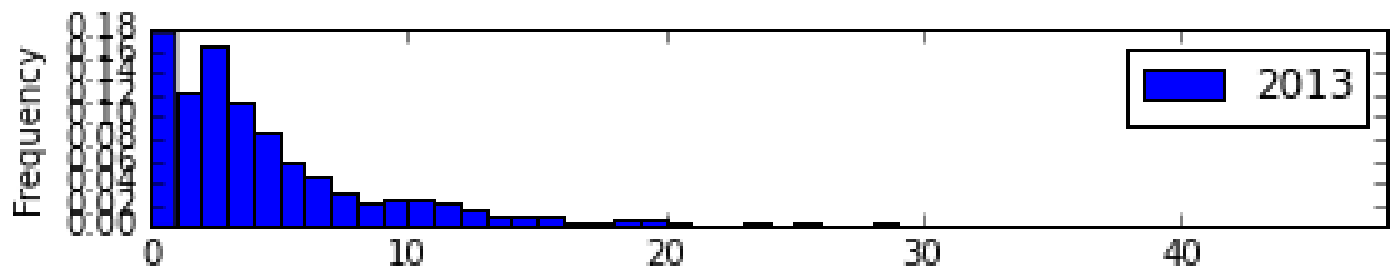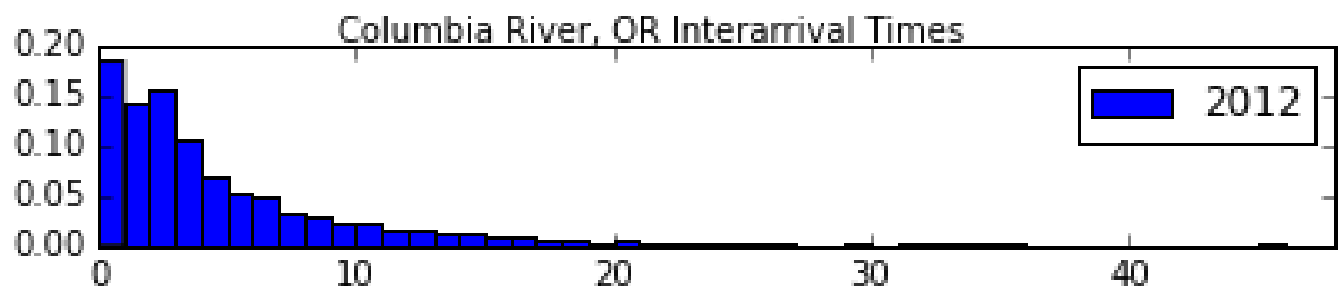
Columbia River, OR Interarrival Times

Columbia River, OR Vessel Arrival Water Surface Elevation

Delaware Bay

| | 0 | 3 | 6 | 12 Miles |

Legend

⭐ Port of Interest

▲ NOAA Tide Station

━ Observation Reference

Ship John Shoal, NJ

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
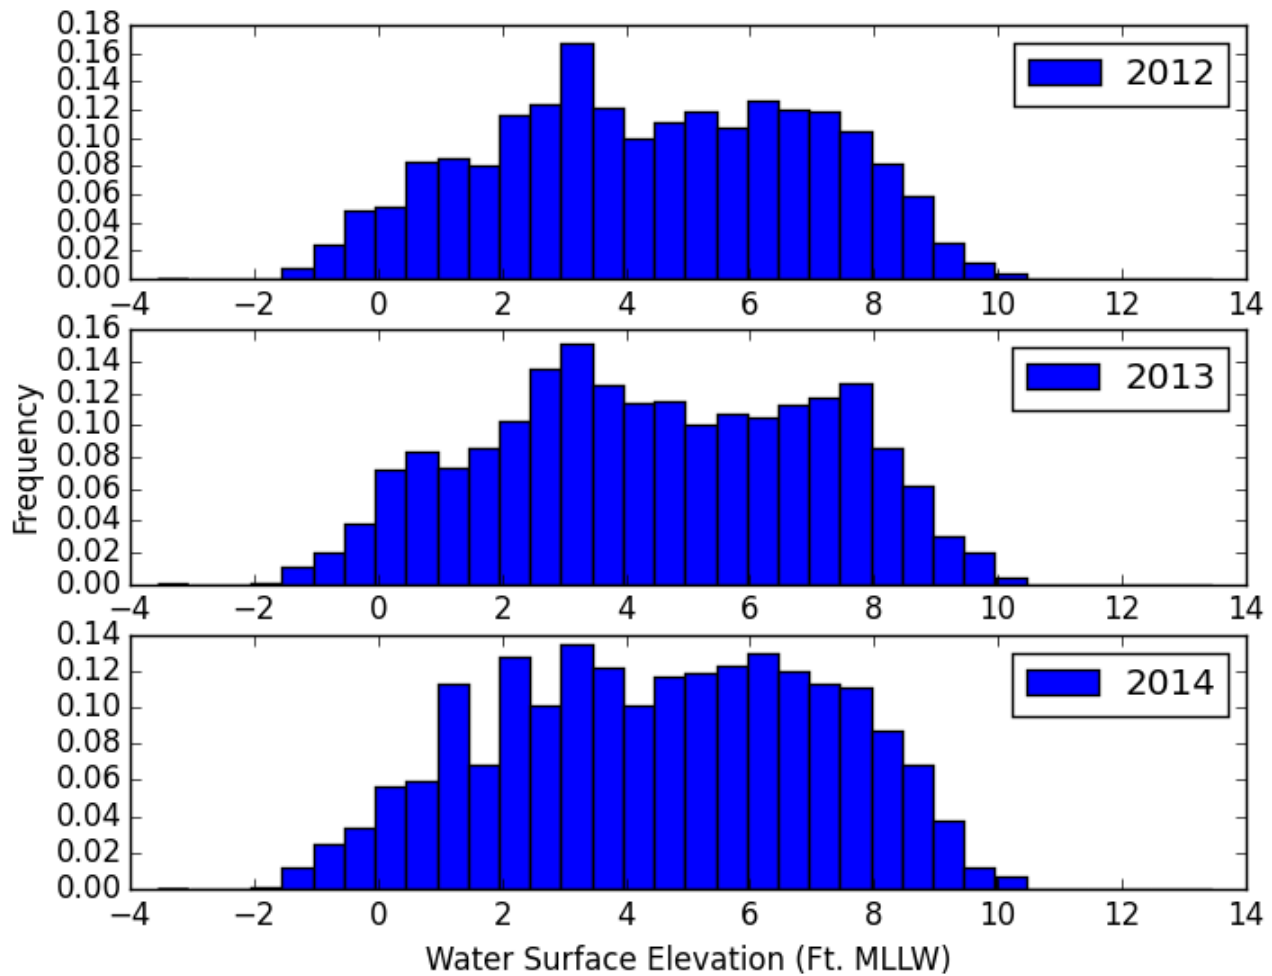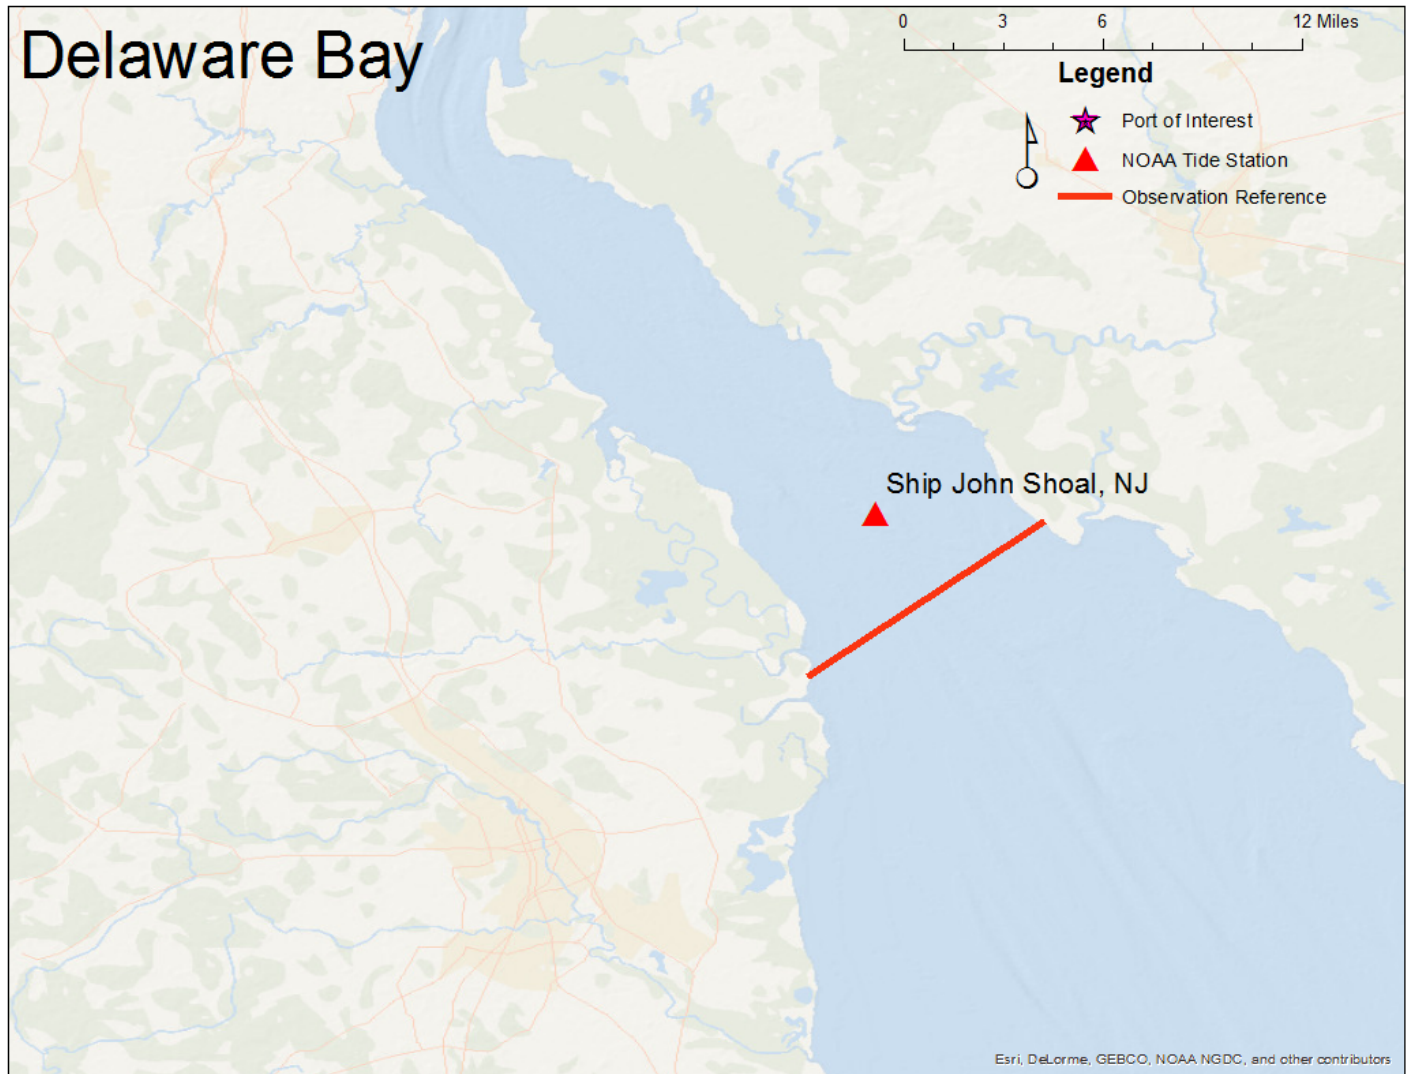
Port of Interest: Delaware Bay
Tide Station Number: 8537121

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	8.76	1.08	4.91	0.25	0.49	0.26	0.03	1744
2013	8.95	1.07	4.92	0.21	0.50	0.29	0.16	2427
2014	8.89	1.07	4.94	0.23	0.50	0.28	0.10	2313

Tide Cycle, NOAA Station 8537121, January 1, 2012

Vessel Call Frequency, Delaware Bay, 2012
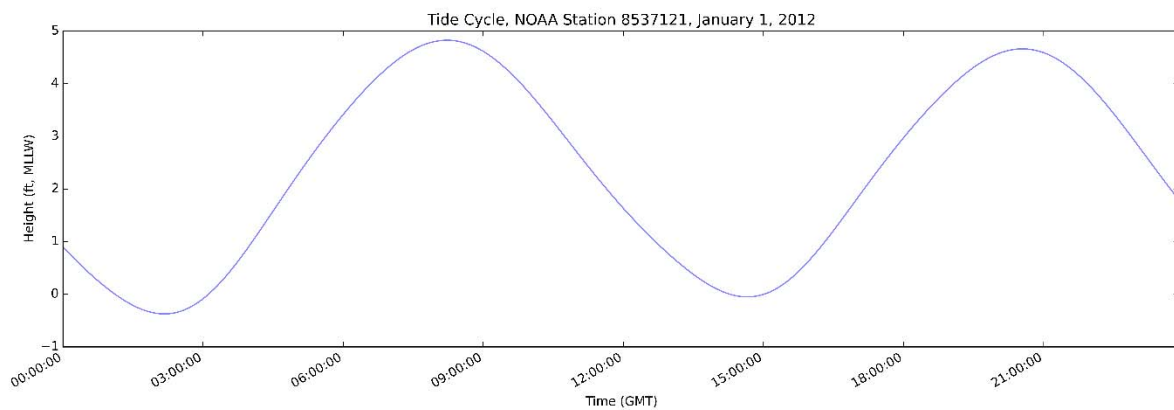
Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	13	13	21	22	21	17	16	17	12	6	9	11	8	8	11	13	8	11	11	11	8	13	17	8
TUE	10	4	8	4	14	23	23	16	43	18	11	9	14	11	13	12	13	13	11	7	10	6	8	6
WED	6	6	9	5	6	12	13	7	11	8	9	4	14	7	6	4	11	12	11	13	11	5	13	5
THU	10	5	7	5	6	6	5	6	9	10	9	9	8	10	6	8	13	16	18	12	7	10	14	10
FRI	13	5	9	6	10	6	11	10	10	5	6	7	8	7	7	10	7	9	9	13	6	10	6	5
SAT	6	5	8	6	7	7	5	5	9	9	8	6	13	4	8	8	7	7	14	9	3	6	8	4
SUN	7	2	6	3	16	31	29	25	15	6	6	14	11	14	10	13	11	17	22	22	22	11	15	10

Vessel Call Frequency, Delaware Bay, 2013

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	23	25	16	29	33	24	23	19	14	13	13	22	12	17	12	18	17	14	12	12	19	13	14	7
TUE	11	10	11	16	10	39	37	22	50	20	15	18	14	13	14	9	14	12	17	14	13	13	13	15
WED	11	11	10	8	9	14	19	12	9	10	16	15	9	7	18	12	11	18	5	14	13	15	16	12
THU	13	5	15	12	6	20	18	14	6	7	6	10	11	10	6	14	12	22	20	19	18	14	13	14
FRI	4	14	13	6	15	16	19	11	11	19	12	12	10	9	13	10	13	13	9	14	16	7	10	5
SAT	8	11	9	11	11	17	14	13	10	12	8	18	18	8	10	9	9	19	10	9	11	12	6	17
SUN	11	10	13	14	9	23	31	19	17	10	14	17	12	19	16	15	18	14	22	23	22	24	34	19

Vessel Call Frequency, Delaware Bay, 2014

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	18	15	19	15	26	27	17	27	10	18	12	13	19	15	10	18	9	14	17	11	13	13	10	15
TUE	10	13	12	17	19	34	40	17	27	20	14	14	12	16	11	18	16	14	15	10	8	13	16	14
WED	9	13	12	15	14	14	16	13	20	6	5	11	10	10	8	14	11	16	9	20	5	19	13	17
THU	9	13	15	9	10	11	5	12	5	14	4	14	9	14	18	14	8	14	8	23	14	8	10	23
FRI	11	13	11	6	12	31	45	25	14	6	5	11	14	11	8	13	11	10	8	14	10	17	10	12
SAT	8	10	5	14	17	17	11	9	7	6	13	12	8	11	13	12	13	7	9	11	10	10	10	11
SUN	5	11	12	8	10	20	18	20	20	11	9	13	15	13	15	21	14	21	18	18	22	21	17	14
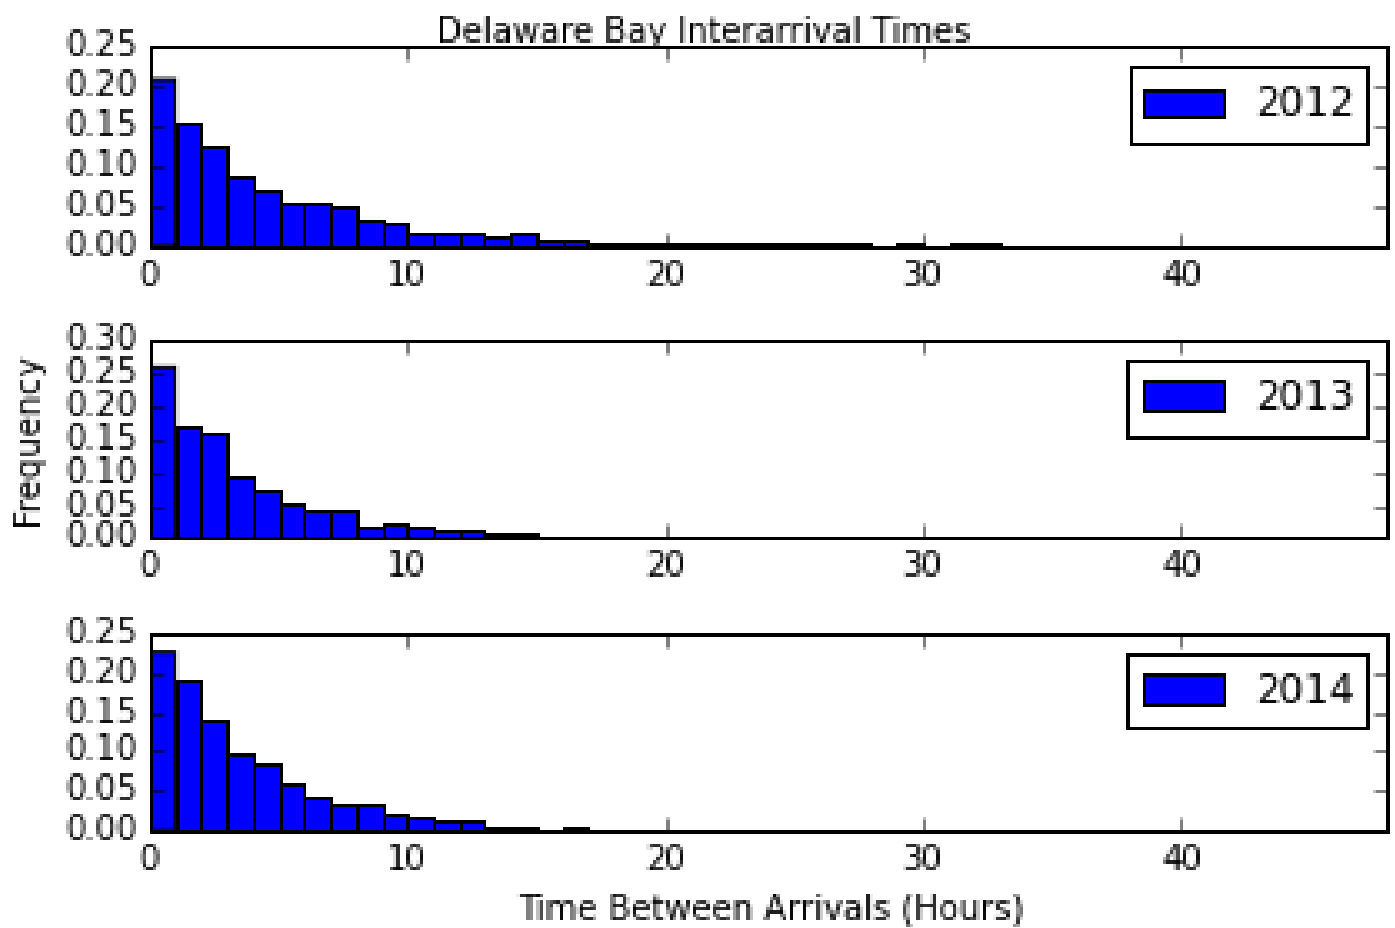
Delaware Bay Vessel Arrival Water Surface Elevation

Freeport

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors

Legend
- ★ Port of Interest
- ▲ NOAA Tide Station
- ▬ Observation Reference
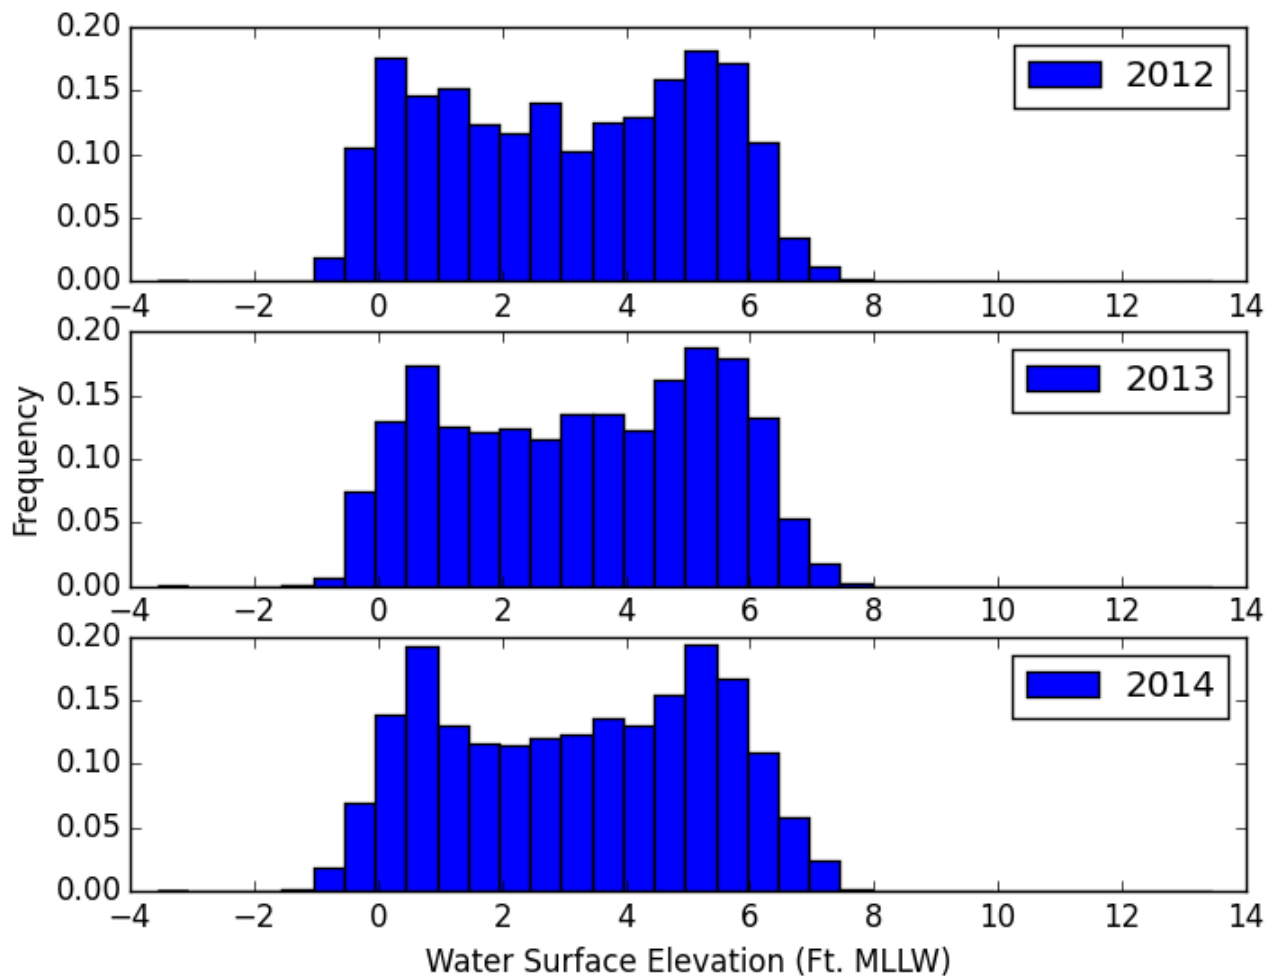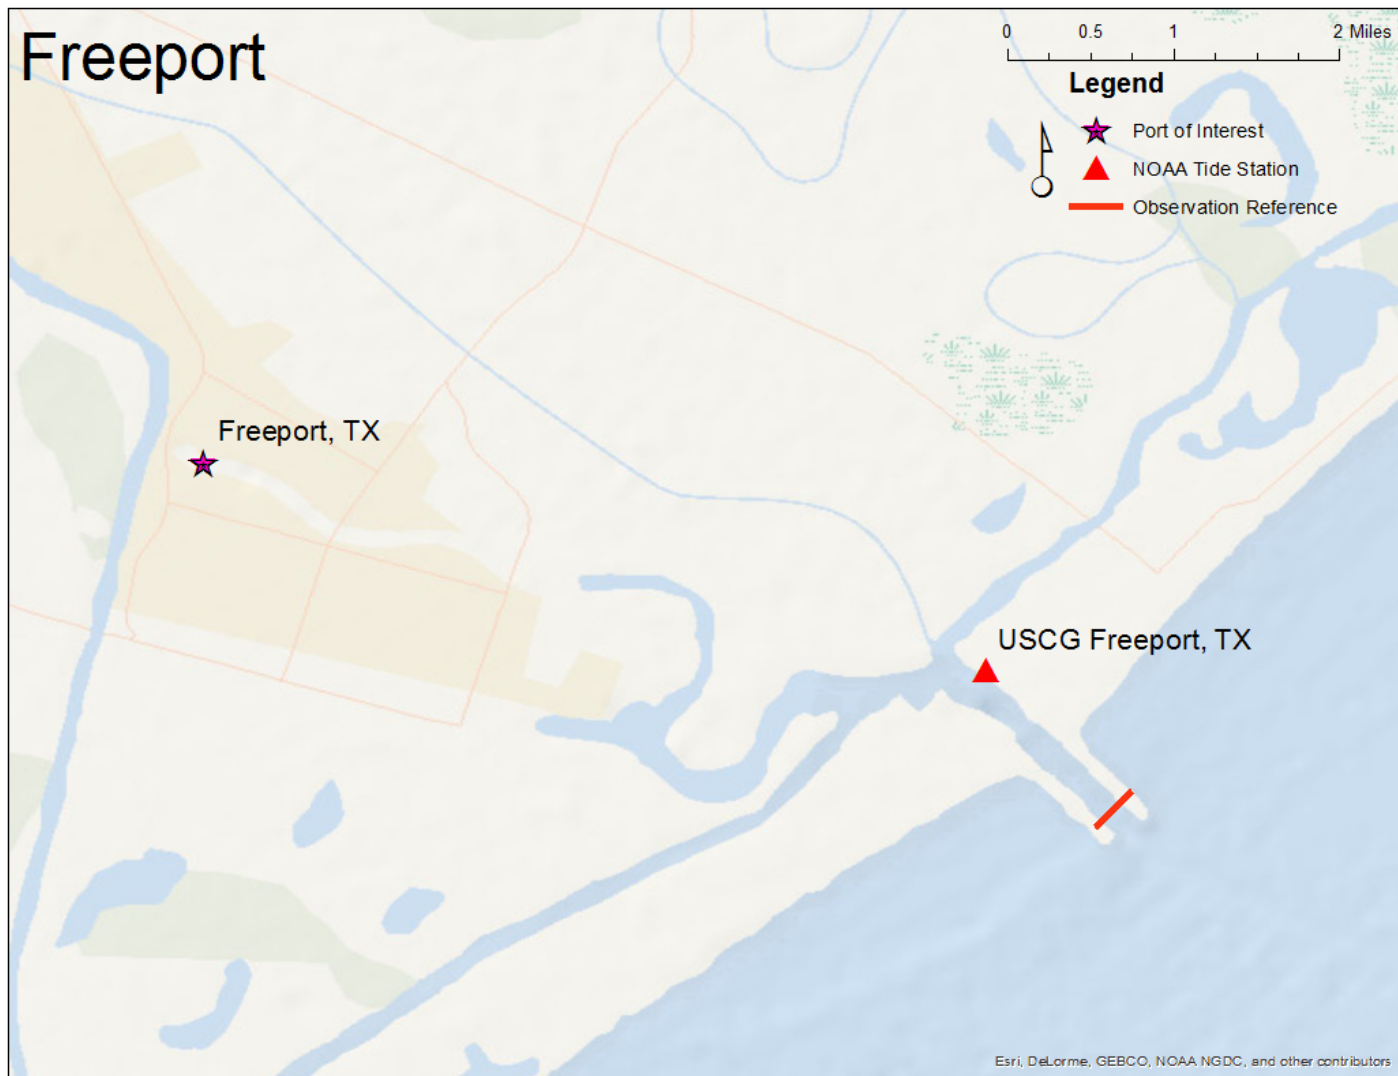
Port of Interest:	**Freeport, TX**
Tide Station Number:	8772447

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	3.17	0.59	1.39	0.23	0.50	0.27	0.10	901
2013	3.16	0.61	1.37	0.23	0.51	0.26	0.06	749
2014	3.02	0.62	1.36	0.24	0.50	0.27	0.07	741

Tide Cycle, NOAA Station 8772447, January 1, 2012

Vessel Call Frequency, Freeport, TX, 2012
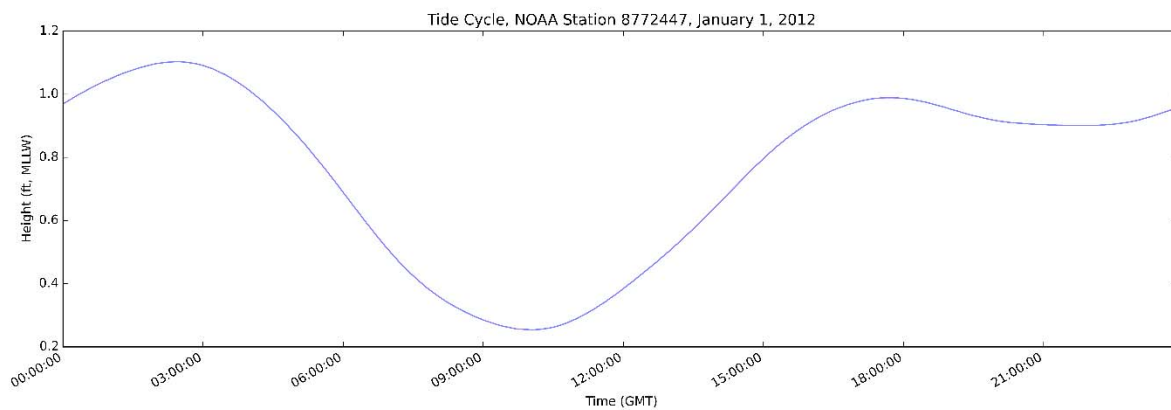
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	3	5	1	2	2	3	3	3	3	2	6	19	12	14	11	9	9	6	6	4	7	2	5	2
TUE	4	3	6	9	13	10	12	5	0	2	4	6	7	10	10	6	4	11	5	7	2	4	7	4
WED	3	6	3	10	6	5	6	4	7	14	3	5	8	11	10	7	3	9	5	5	6	0	8	5
THU	3	7	2	5	5	1	2	1	2	2	2	2	7	10	8	4	6	4	5	5	7	3	7	5
FRI	4	1	2	5	6	7	6	4	8	18	6	9	8	9	4	8	6	6	2	7	11	9	4	5
SAT	6	3	5	3	3	5	2	3	3	2	2	1	8	9	9	5	3	4	6	4	2	4	1	7
SUN	5	4	3	4	4	3	6	1	2	1	0	4	7	7	6	4	6	7	5	5	4	4	8	2

Hour (UTC)

Vessel Call Frequency, Freeport, TX, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	2	2	4	4	3	1	5	2	3	12	19	14	6	10	1	4	2	8	3	5	5	11	5	7
TUE	2	2	3	8	2	1	10	8	5	14	3	5	4	5	6	3	2	2	5	6	6	2	7	4
WED	1	3	2	5	2	1	1	1	3	4	3	5	7	6	7	6	6	7	4	5	3	4	6	3
THU	2	4	3	3	2	3	2	5	1	3	1	2	11	5	4	2	7	3	1	1	1	3	2	4
FRI	4	2	0	2	3	5	2	6	4	13	5	11	6	11	6	7	6	4	10	5	6	5	2	1
SAT	4	1	5	6	3	2	2	5	3	2	4	3	9	7	9	5	4	3	2	6	1	8	5	4
SUN	0	3	5	3	1	2	4	1	5	3	1	4	9	11	5	4	3	5	7	3	2	7	6	3

Hour (UTC)

Vessel Call Frequency, Freeport, TX, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	3	3	3	6	3	3	1	1	1	0	23	7	8	12	5	5	2	3	1	4	9	6	6	7
TUE	6	1	5	3	5	1	1	4	3	9	2	3	5	8	6	3	5	6	6	3	2	5	3	3
WED	1	1	1	7	1	4	1	2	2	3	3	7	8	5	4	6	6	3	4	5	3	7	4	4
THU	3	1	2	2	3	5	2	2	0	4	4	3	15	10	9	3	4	3	5	4	6	7	5	6
FRI	2	1	2	3	4	2	1	1	1	10	10	9	8	15	6	8	9	4	3	2	3	6	10	4
SAT	2	2	4	1	4	1	2	2	2	4	3	3	8	9	6	3	3	6	2	4	5	5	3	7
SUN	5	1	6	5	3	3	5	2	1	0	1	0	10	10	7	4	5	5	10	6	3	2	7	5

Hour (UTC)

Freeport, TX Interarrival Times
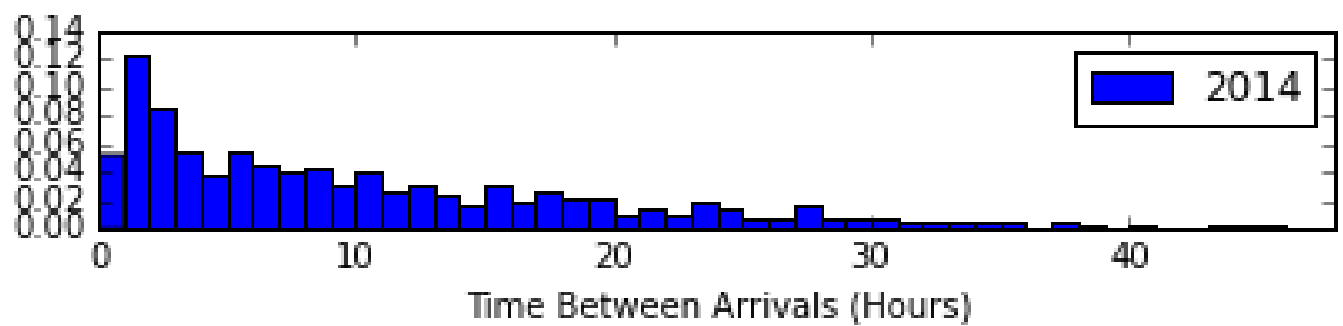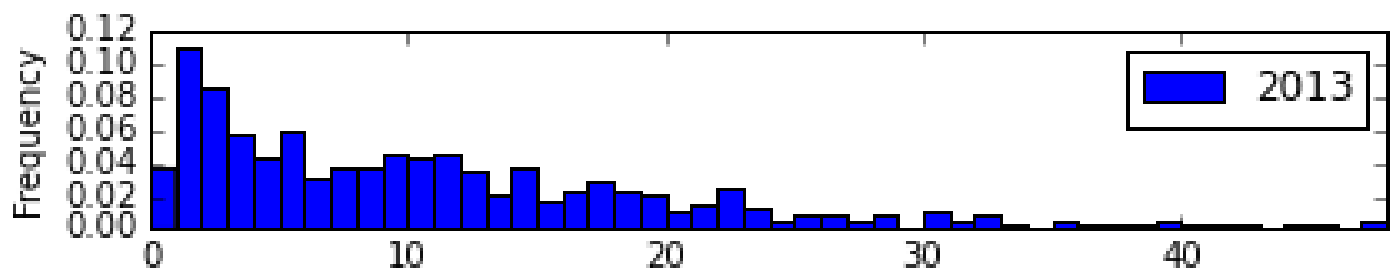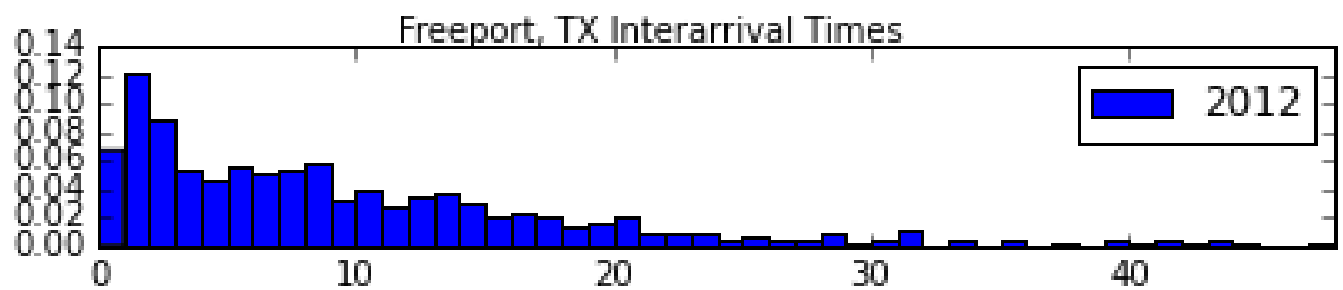
Freeport, TX Vessel Arrival Water Surface Elevation

Honolulu

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors

Legend	
★	Port of Interest
▲	NOAA Tide Station
—	Observation Reference

Honolulu, HI

Honolulu, HI

| | 0 | 0.275 | 0.55 | 1.1 Miles |
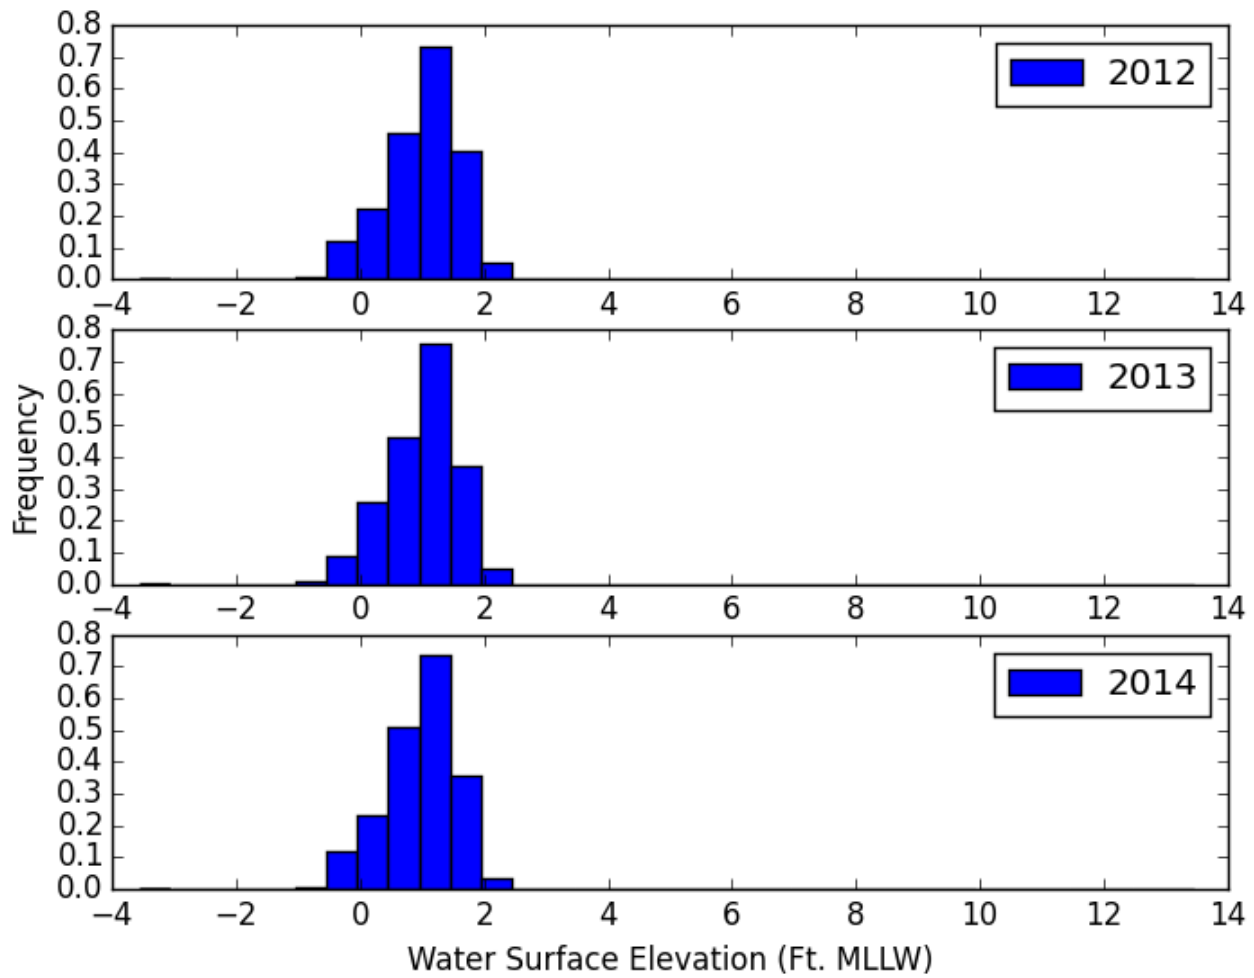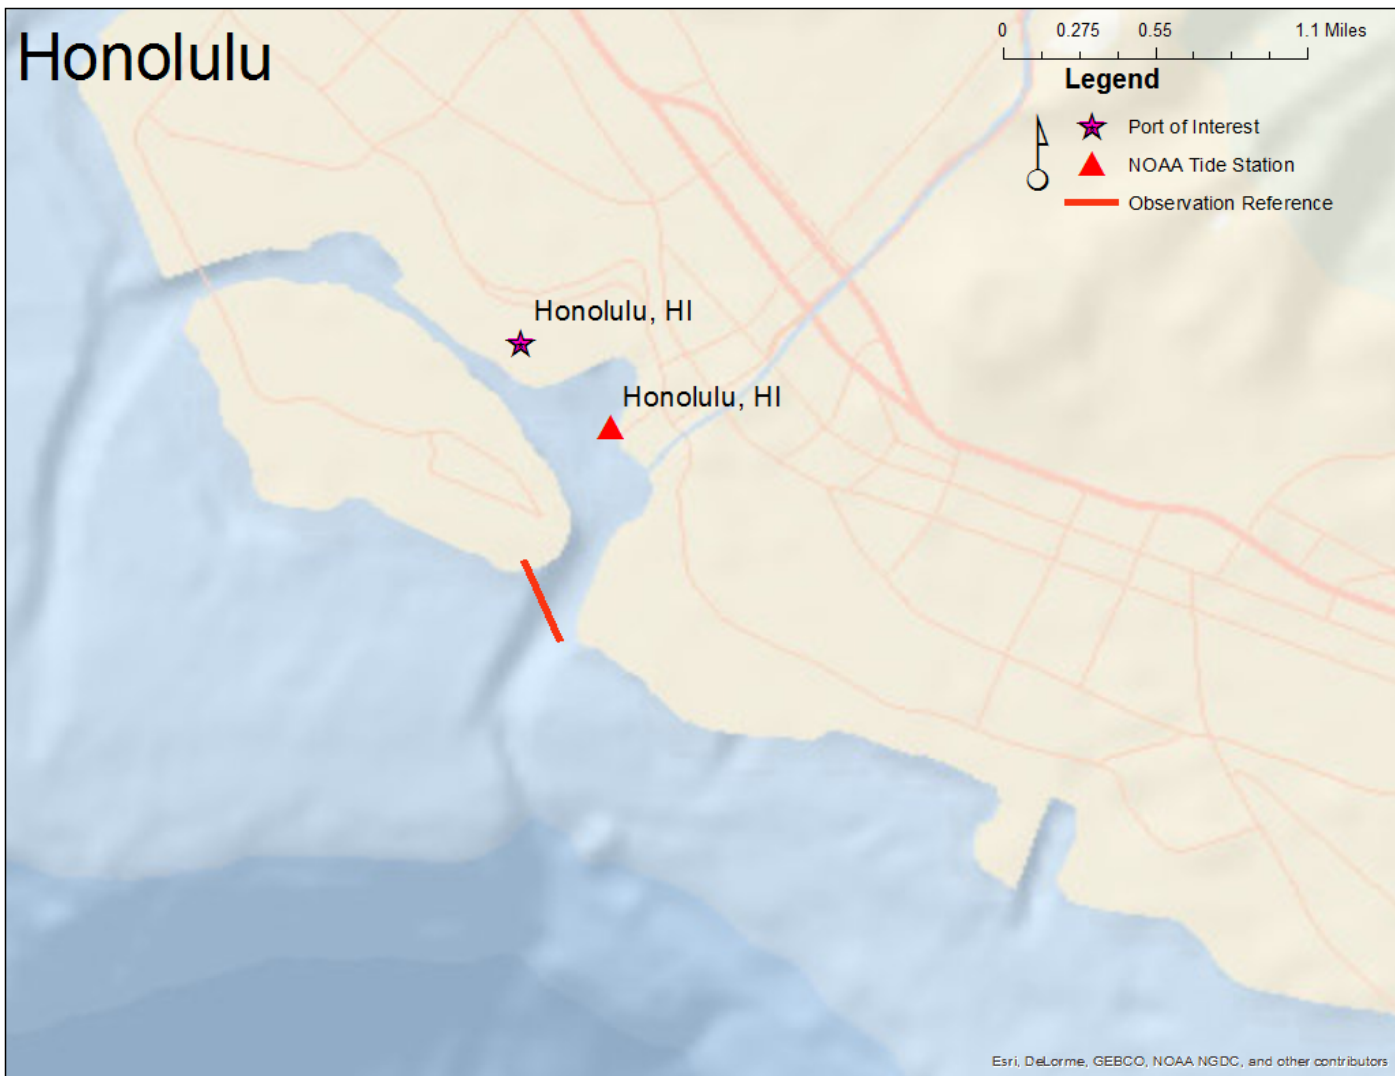
Port of Interest: Honolulu, HI

Tide Station Number: 1612340

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	3.21	0.35	1.25	0.24	0.48	0.28	0.09	748
2013	3.10	0.36	1.24	0.24	0.51	0.26	0.04	727
2014	3.03	0.36	1.24	0.25	0.50	0.25	0.01	1567

Tide Cycle, NOAA Station 1612340, January 1, 2012

Vessel Call Frequency, Honolulu, HI, 2012
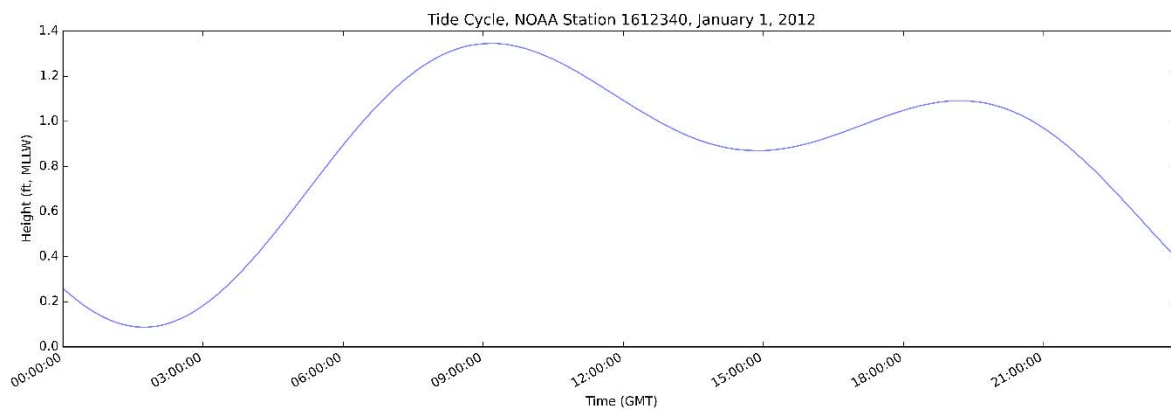
Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	1	3	20	7	8	6	6	32	5	6	5	5	4	5	13	16	16	10	4	2	3	3	1	3
TUE	2	5	8	4	3	11	1	10	5	4	9	6	6	5	8	14	10	2	3	2	4	1	0	3
WED	4	4	10	5	6	5	1	3	2	1	4	2	2	3	1	5	5	5	0	1	1	4	1	5
THU	6	4	11	7	6	32	13	8	7	4	0	2	2	2	1	5	5	5	3	2	3	2	1	1
FRI	1	1	2	0	1	4	0	4	4	4	5	3	4	6	7	5	6	6	2	0	0	3	2	3
SAT	2	5	4	2	5	2	4	4	5	4	2	3	1	2	5	8	1	4	2	2	2	3	3	1
SUN	1	7	13	8	4	3	5	7	3	7	2	0	1	0	1	2	4	1	0	4	2	0	2	0

Vessel Call Frequency, Honolulu, HI, 2013

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	0	20	21	3	7	3	4	29	13	6	4	2	1	1	7	6	15	9	3	1	2	2	0	4
TUE	1	1	6	2	4	8	4	9	6	8	7	4	5	9	12	20	10	11	4	3	2	1	1	3
WED	2	3	8	5	1	3	0	1	3	0	1	0	1	0	3	2	2	2	0	1	3	5	2	6
THU	2	13	6	9	13	40	8	5	2	2	2	1	2	0	2	3	1	7	0	2	2	1	3	1
FRI	1	1	5	1	0	1	3	1	2	3	5	3	4	4	10	6	5	11	6	3	3	0	1	1
SAT	3	4	7	1	5	8	6	5	2	5	5	2	4	3	3	2	0	3	1	2	1	4	8	4
SUN	1	2	8	6	7	5	6	7	2	0	1	2	0	1	1	2	3	3	3	4	2	4	2	2

Vessel Call Frequency, Honolulu, HI, 2014

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	27	19	8	11	7	3	36	7	3	4	5	10	13	9	13	20	21	11	7	10	5	9	7
TUE	13	4	11	7	9	9	14	6	4	7	13	3	5	13	13	11	13	10	5	5	12	10	6	9
WED	6	11	21	5	12	13	6	6	6	7	3	2	5	3	4	14	14	2	11	12	13	7	10	10
THU	3	15	11	16	17	41	17	23	11	6	3	1	3	2	7	15	7	15	14	23	16	20	13	8
FRI	5	3	6	9	10	6	9	4	5	0	3	2	2	8	6	16	13	7	9	13	5	7	13	12
SAT	6	6	11	11	11	12	7	10	11	7	6	4	17	8	4	10	6	7	8	8	12	7	8	9
SUN	5	14	26	15	14	9	8	10	6	4	3	3	5	2	4	8	9	9	7	5	8	6	10	6

Honolulu, HI Interarrival Times
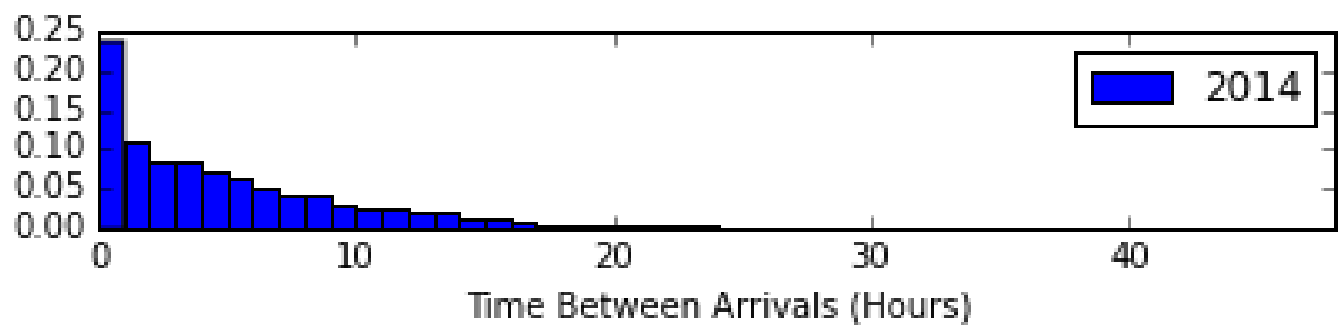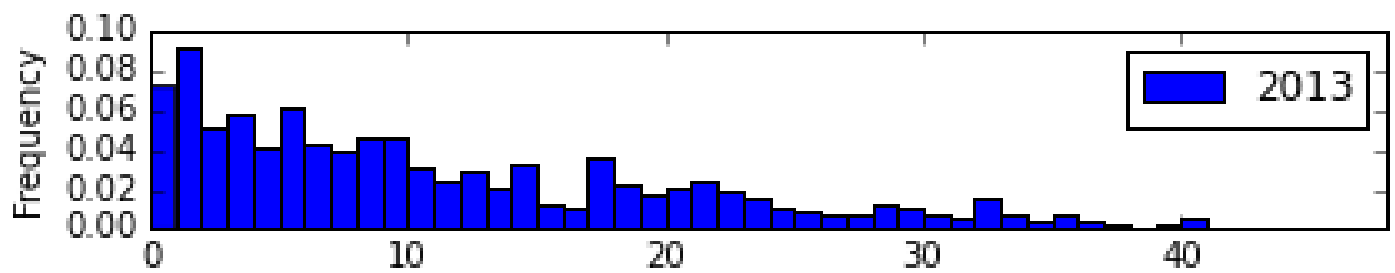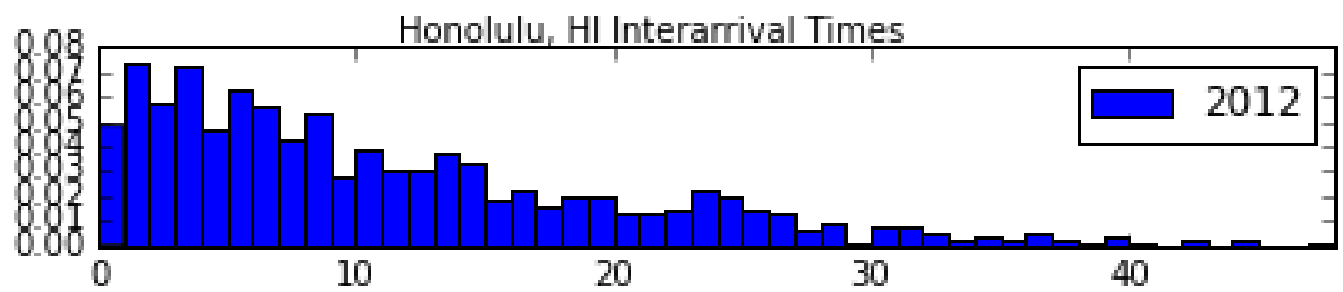
Honolulu, HI Vessel Arrival Water Surface Elevation
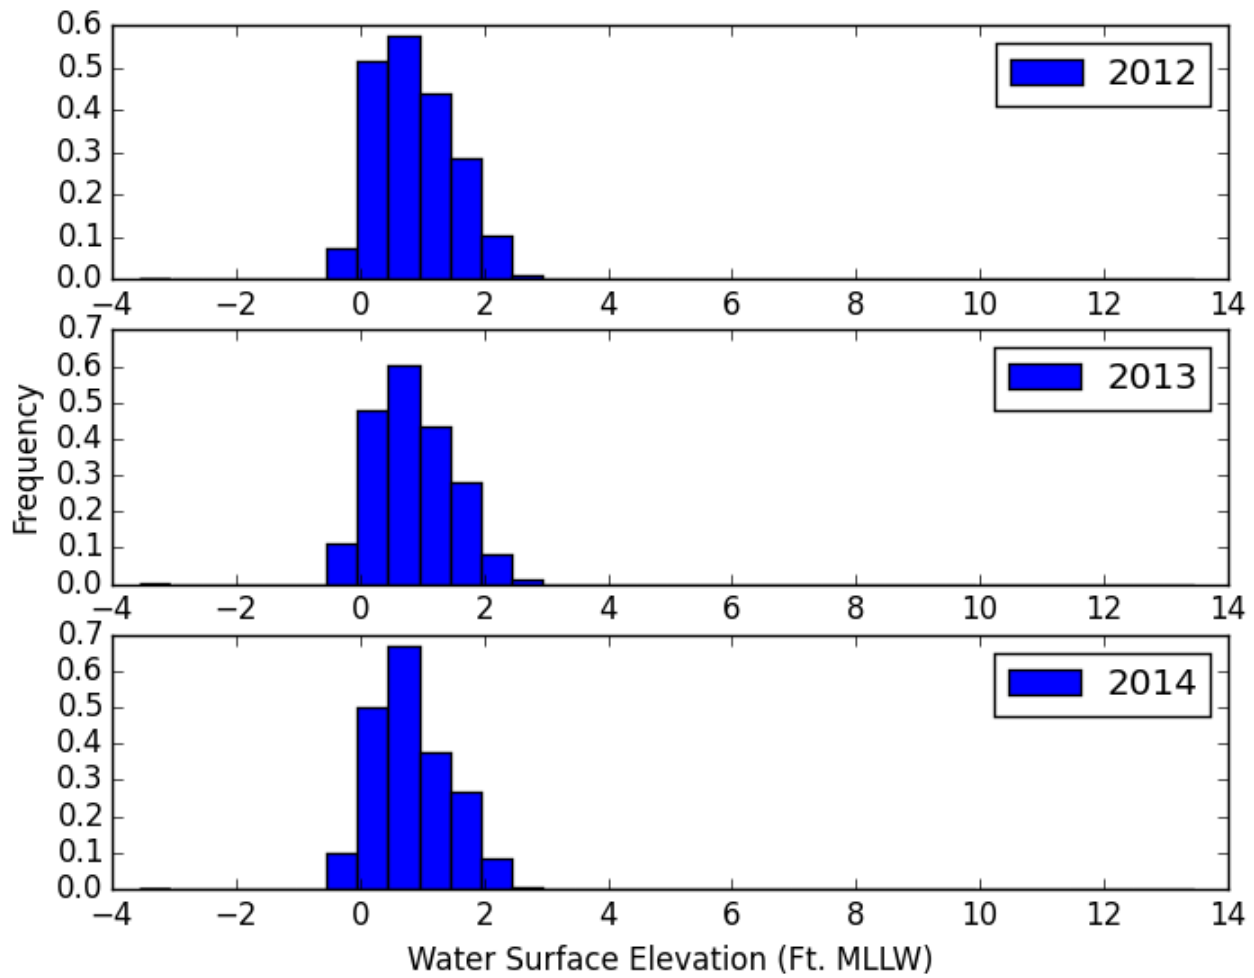
Jacksonville

Port of Interest:	Jacksonville, FL	
Tide Station Number:	8720218	

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	7.39	0.94	4.00	0.21	0.53	0.26	0.10	1447
2013	7.36	0.93	4.03	0.22	0.52	0.27	0.10	6524
2014	7.75	0.93	4.04	0.24	0.53	0.24	0.01	5240

Tide Cycle, NOAA Station 8720218, January 1, 2012

Vessel Call Frequency, Jacksonville, FL, 2012
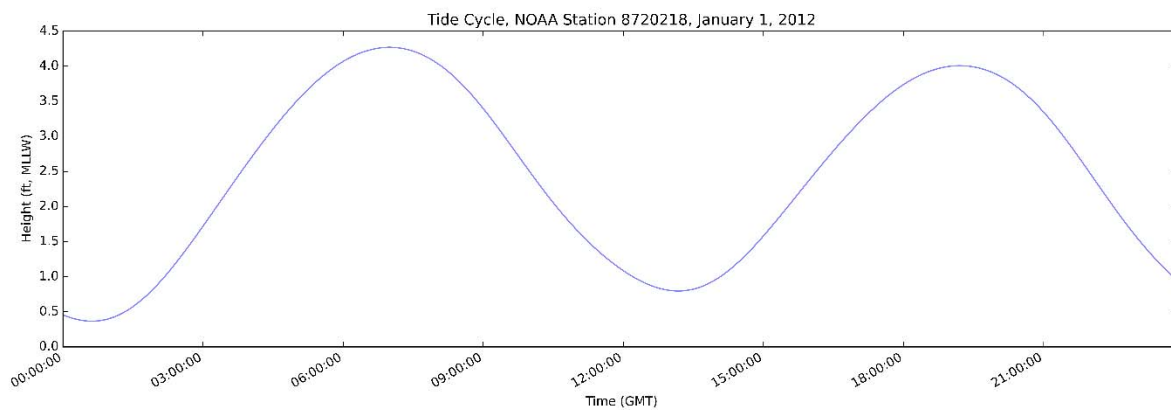
Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	3	4	2	2	4	2	8	10	12	7	5	5	3	14	9	8	15	9	9	16	14	11	14
TUE	8	2	3	9	5	5	11	13	29	28	10	12	13	9	12	10	15	8	10	17	11	11	11	7
WED	10	10	5	6	2	5	3	7	13	13	11	6	3	7	5	11	6	2	6	2	8	6	13	6
THU	8	6	7	4	2	3	6	14	20	20	8	12	6	7	15	10	8	8	3	4	11	20	8	5
FRI	4	8	7	4	3	4	9	11	33	26	34	24	5	5	11	4	7	3	4	2	7	2	5	6
SAT	7	4	6	3	6	6	7	4	12	13	3	7	4	3	9	3	3	3	4	3	6	5	7	2
SUN	2	4	2	2	1	1	2	2	7	8	4	7	4	3	3	0	4	2	2	5	14	10	10	18

Vessel Call Frequency, Jacksonville, FL, 2013

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	12	7	3	4	7	4	5	8	19	8	9	5	8	14	15	11	5	5	4	8	12	10	16	12
TUE	6	12	11	7	6	7	8	15	42	44	42	18	18	15	11	14	8	20	17	25	13	10	13	
WED	14	9	4	7	2	3	6	7	10	11	11	5	7	6	8	14	12	5	7	13	14	27	27	18
THU	16	10	17	9	5	5	2	10	18	28	37	16	13	13	12	11	13	10	10	5	11	14	18	12
FRI	17	12	14	10	7	7	4	35	34	25	23	16	7	7	9	12	10	9	8	8	11	9	7	6
SAT	7	7	6	5	12	0	6	10	11	13	9	7	6	8	3	6	4	10	4	8	9	5	3	10
SUN	3	5	2	3	3	1	4	6	14	9	2	3	4	5	11	6	6	10	8	4	6	14	16	11

Vessel Call Frequency, Jacksonville, FL, 2014

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	4	4	3	10	1	4	5	22	12	7	4	7	7	7	11	10	5	4	6	13	18	8	11
TUE	7	7	6	4	0	6	4	32	41	49	27	11	10	14	11	13	9	5	3	13	20	15	7	12
WED	12	11	11	6	4	2	8	8	14	13	10	7	6	4	7	3	6	3	6	10	6	12	8	12
THU	5	7	7	7	3	1	7	8	19	21	24	11	6	7	9	7	7	4	3	5	14	14	10	11
FRI	6	10	13	4	5	4	5	42	71	25	8	5	8	3	9	7	9	2	4	12	14	15	11	4
SAT	9	7	3	5	5	5	8	8	11	12	6	6	4	5	4	8	2	5	6	5	7	4	3	4
SUN	4	2	1	3	0	6	2	6	11	8	6	6	3	1	7	4	5	6	4	5	13	20	16	6

Jacksonville, FL Interarrival Times
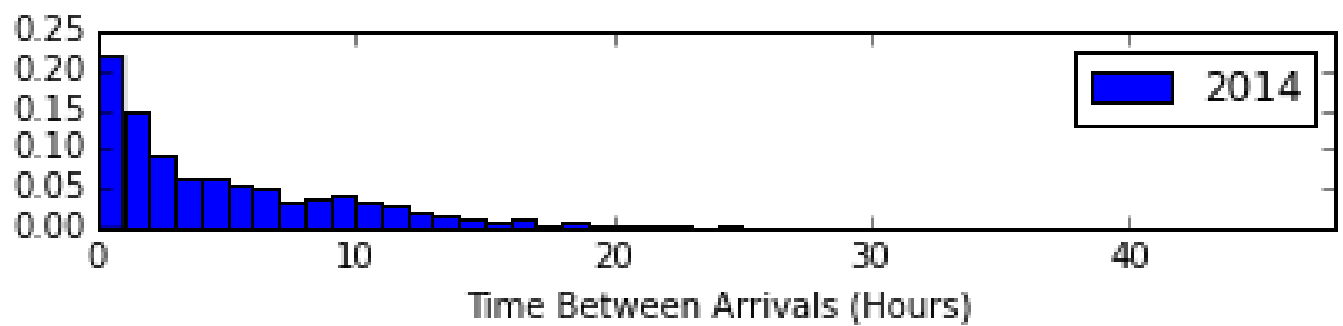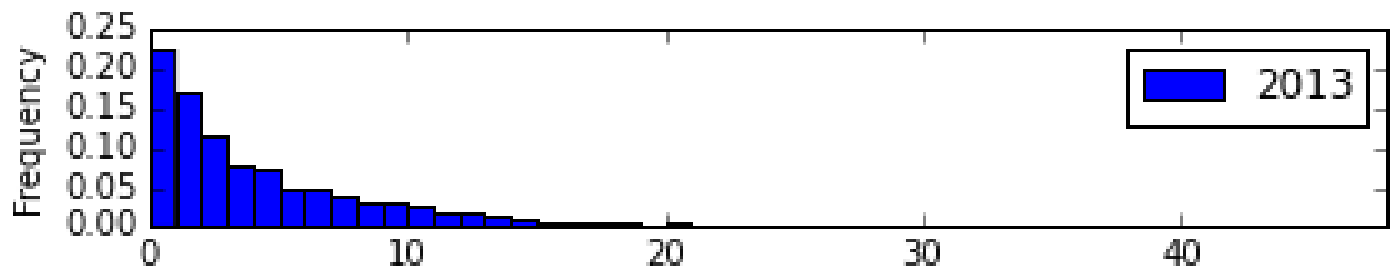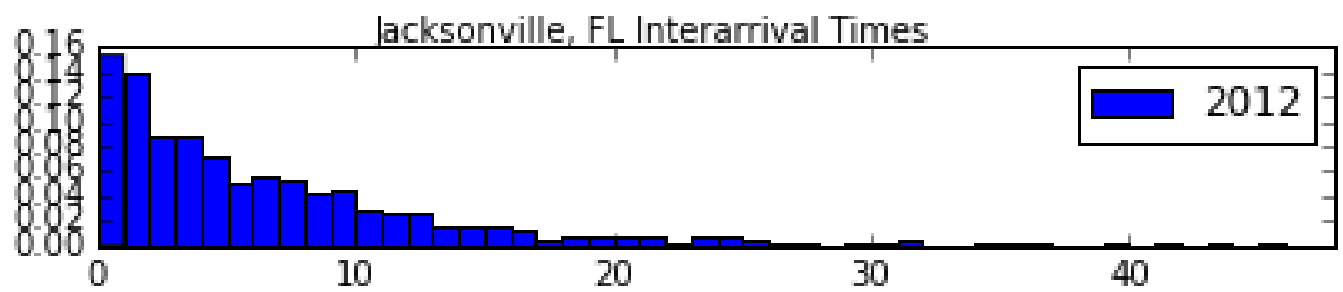
Jacksonville, FL Vessel Arrival Water Surface Elevation

Long Beach

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors

Legend

★	Port of Interest	
▲	NOAA Tide Station	
▬	Observation Reference	
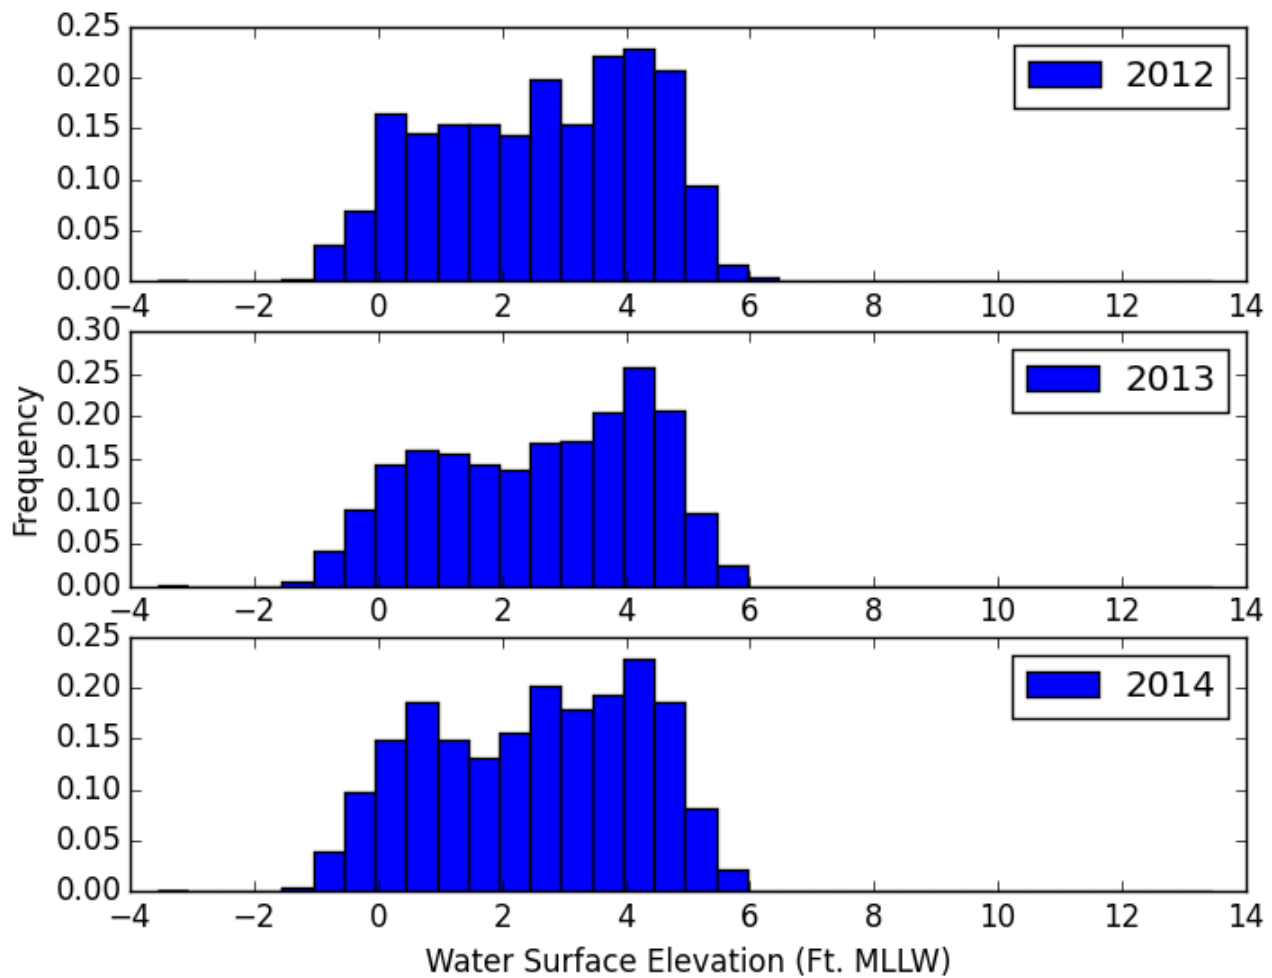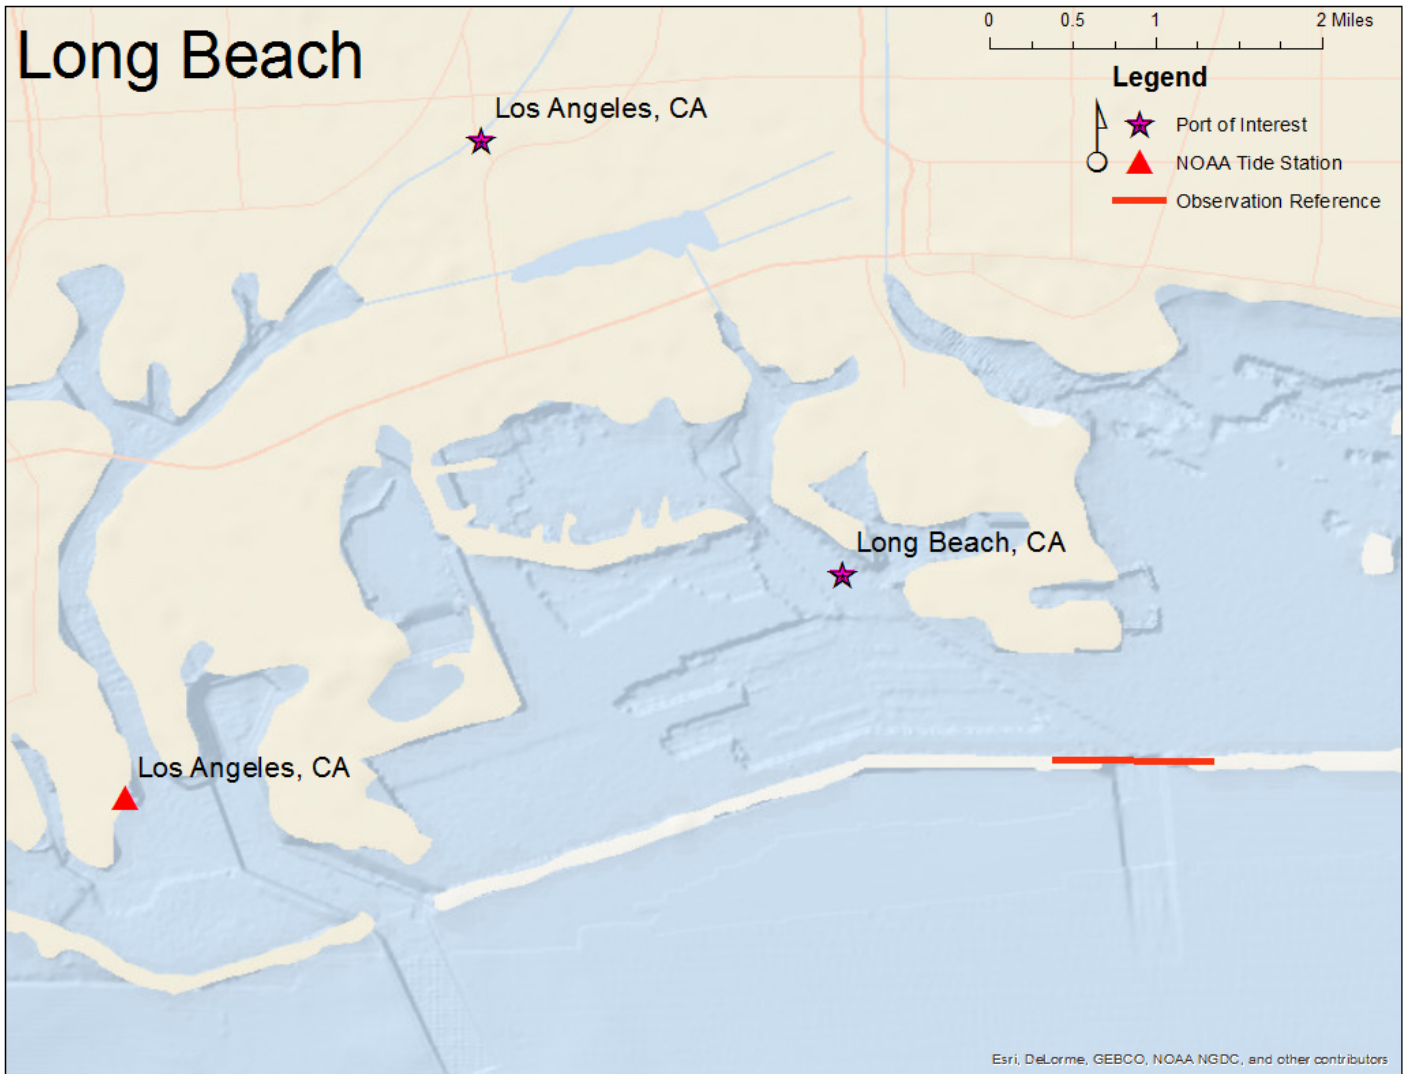
Port of Interest: Long Beach, CA
Tide Station Number: 9410660

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	9.03	1.70	4.00	0.27	0.51	0.21	-0.11	1957
2013	8.82	1.68	3.99	0.30	0.49	0.20	-0.20	2019
2014	8.78	1.68	3.99	0.31	0.49	0.21	-0.20	2033

Tide Cycle, NOAA Station 9410660, January 1, 2012

Vessel Call Frequency, Los Angeles, CA, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	7	9	2	6	3	4	0	7	9	15	53	49	12	10	4	5	4	2	2	14	53	72	36
TUE	12	13	7	2	5	1	6	2	2	4	12	36	35	13	1	4	2	3	5	4	19	59	42	21
WED	15	13	8	2	6	2	6	2	3	3	9	37	54	33	8	2	2	2	3	7	8	27	55	40
THU	22	20	7	2	6	0	5	3	1	1	2	13	38	31	7	3	5	2	2	5	5	13	23	20
FRI	14	5	8	5	4	3	4	0	1	2	3	49	35	16	7	4	5	4	5	2	11	36	30	22
SAT	13	7	6	4	3	0	1	3	1	0	1	17	52	31	2	2	2	3	2	3	14	16	20	11
SUN	3	7	2	3	3	3	2	2	1	1	2	8	15	11	8	2	3	3	2	2	3	45	27	12

Hour (UTC)

Vessel Call Frequency, Los Angeles, CA, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	13	3	3	4	5	7	4	6	8	20	79	43	17	2	2	1	3	2	9	11	63	56	19
TUE	11	5	10	8	3	3	7	5	6	6	13	51	36	27	6	3	3	6	2	5	14	63	46	25
WED	14	14	4	8	3	6	2	6	7	7	15	65	64	24	16	5	2	3	3	7	13	20	49	41
THU	19	14	11	9	0	4	5	7	9	8	15	19	64	47	9	6	4	10	3	3	4	25	28	25
FRI	14	14	16	8	5	5	6	6	3	5	8	19	36	35	10	2	4	4	3	5	4	18	29	20
SAT	20	9	8	1	3	3	8	6	9	7	14	32	68	41	10	4	4	2	2	14	32	34	28	12
SUN	11	8	9	4	6	3	6	7	6	6	5	9	16	12	7	2	7	4	4	8	6	25	18	9

Hour (UTC)

Vessel Call Frequency, Los Angeles, CA, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	15	15	7	8	9	7	8	9	15	8	28	76	52	22	6	0	5	2	4	6	11	42	46	24
TUE	15	14	6	9	2	8	10	7	6	6	18	55	50	15	13	4	5	2	3	5	8	36	36	29
WED	22	16	9	10	5	9	4	13	7	14	29	71	66	40	16	0	2	4	6	4	15	26	38	32
THU	25	23	10	12	5	9	9	6	7	17	19	34	71	53	7	10	2	3	6	6	13	14	25	22
FRI	25	10	13	4	7	4	4	9	13	4	14	43	57	37	17	6	2	6	4	2	7	15	28	24
SAT	25	20	6	7	9	2	12	13	6	8	14	43	57	39	14	6	8	5	2	6	4	14	22	22
SUN	23	16	11	4	2	6	4	7	4	7	21	33	32	18	7	5	6	4	6	7	18	22	25	18

Hour (UTC)

Long Beach, CA Interarrival Times

Long Beach, CA Vessel Arrival Water Surface Elevation

Los Angeles

0	0.5	1	2 Miles

Legend

⭐ Port of Interest

🔺 NOAA Tide Station

▬ Observation Reference

Los Angeles, CA

Long Beach, CA

Los Angeles, CA

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
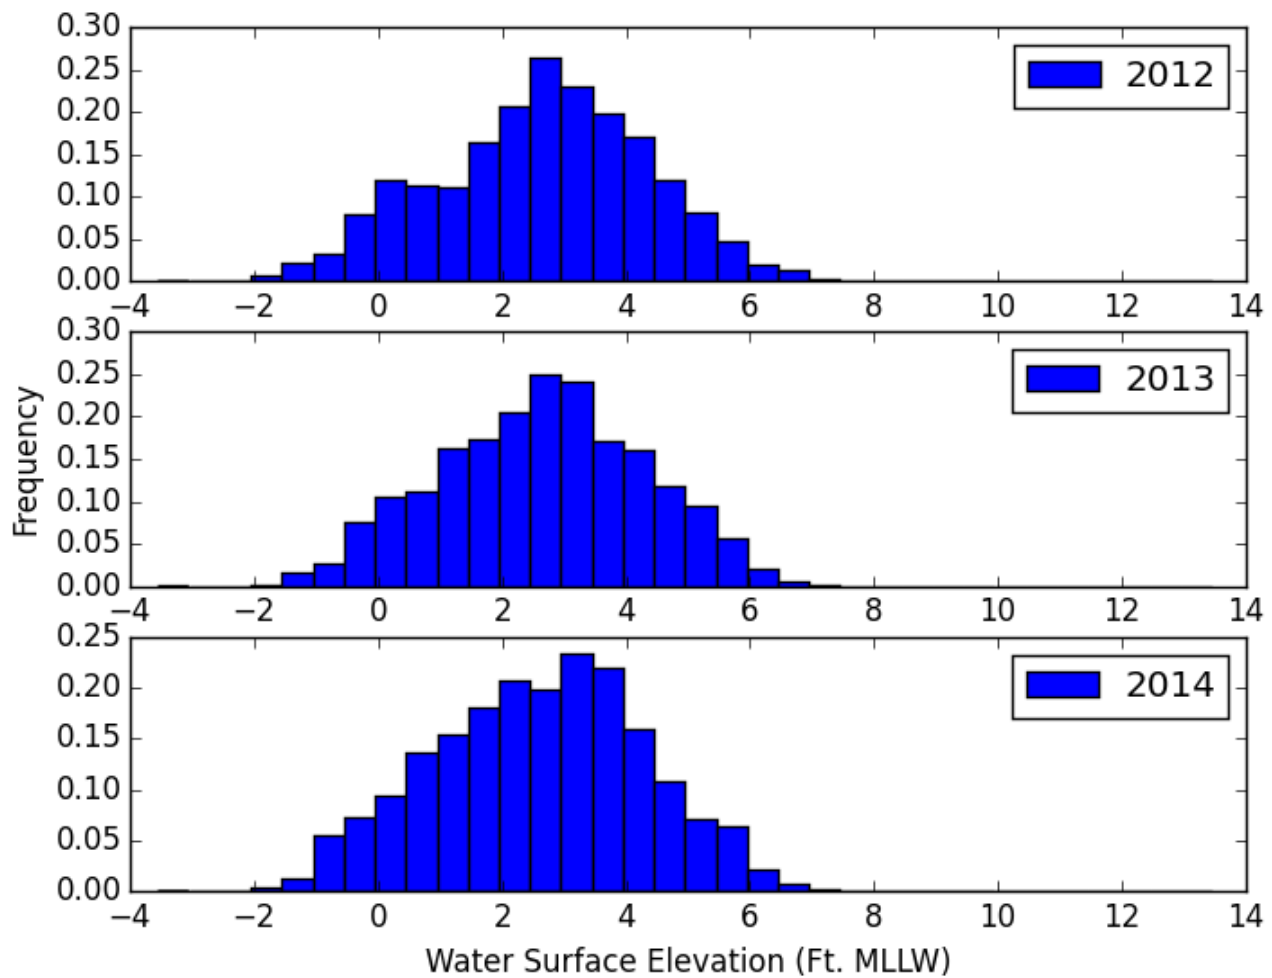
Port of Interest: Los Angeles, CA

Tide Station Number: 9410660

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	9.03	1.70	4.00	0.28	0.51	0.20	-0.16	1938
2013	8.82	1.68	3.99	0.29	0.51	0.20	-0.18	2343
2014	8.78	1.68	3.99	0.30	0.50	0.20	-0.19	2678

Tide Cycle, NOAA Station 9410660, January 1, 2012

Vessel Call Frequency, Los Angeles, CA, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	7	9	2	6	3	4	0	7	9	15	53	49	12	10	4	5	4	2	2	14	53	72	36
TUE	12	13	7	2	5	1	6	2	2	4	12	36	35	13	1	4	2	3	5	4	19	59	42	21
WED	15	13	8	2	6	2	6	2	3	3	9	37	54	33	8	2	2	2	3	7	8	27	55	40
THU	22	20	7	2	6	0	5	3	1	1	2	13	38	31	7	3	5	2	2	5	5	13	23	20
FRI	14	5	8	5	4	3	4	0	1	2	3	49	35	16	7	4	5	4	5	2	11	36	30	22
SAT	13	7	6	4	3	0	1	3	1	0	1	17	52	31	2	2	2	3	2	3	14	16	20	11
SUN	3	7	2	3	3	3	2	2	1	1	2	8	15	11	8	2	3	3	2	2	3	45	27	12

Hour (UTC)

Vessel Call Frequency, Los Angeles, CA, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	13	3	3	4	5	7	4	6	8	20	79	43	17	2	2	1	3	2	9	11	63	56	19
TUE	11	5	10	8	3	3	7	5	6	6	13	51	36	27	6	3	3	6	2	5	14	63	46	25
WED	14	14	4	8	3	6	2	6	7	7	15	65	64	24	16	5	2	3	3	7	13	20	49	41
THU	19	14	11	9	0	4	5	7	9	8	15	19	64	47	9	6	4	10	3	3	4	25	28	25
FRI	14	14	16	8	5	5	6	6	3	5	8	19	36	35	10	2	4	4	3	5	4	18	29	20
SAT	20	9	8	1	3	3	8	6	9	7	14	32	68	41	10	4	4	2	2	14	32	34	28	12
SUN	11	8	9	4	6	3	6	7	6	6	5	9	16	12	7	2	7	4	4	8	6	25	18	9

Hour (GMT)

Vessel Call Frequency, Los Angeles, CA, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	15	15	7	8	9	7	8	9	15	8	28	76	52	22	6	0	5	2	4	6	11	42	46	24
TUE	15	14	6	9	2	8	10	7	6	6	18	55	50	15	13	4	5	2	3	5	8	36	36	29
WED	22	16	9	10	5	9	4	13	7	14	29	71	66	40	16	0	2	4	6	4	15	26	38	32
THU	25	23	10	12	5	9	9	6	7	17	19	34	71	53	7	10	2	3	6	6	13	14	25	22
FRI	25	10	13	4	7	4	4	9	13	4	14	43	57	37	17	6	2	6	4	2	7	15	28	24
SAT	25	20	6	7	9	2	12	13	6	8	14	43	57	39	14	6	8	5	2	6	4	14	22	22
SUN	23	16	11	4	2	6	4	7	4	7	21	33	32	18	7	5	6	4	6	7	18	22	25	18

Hour (GMT)

Los Angeles, CA Interarrival Times

Los Angeles, CA Vessel Arrival Water Surface Elevation

Mobile Bay
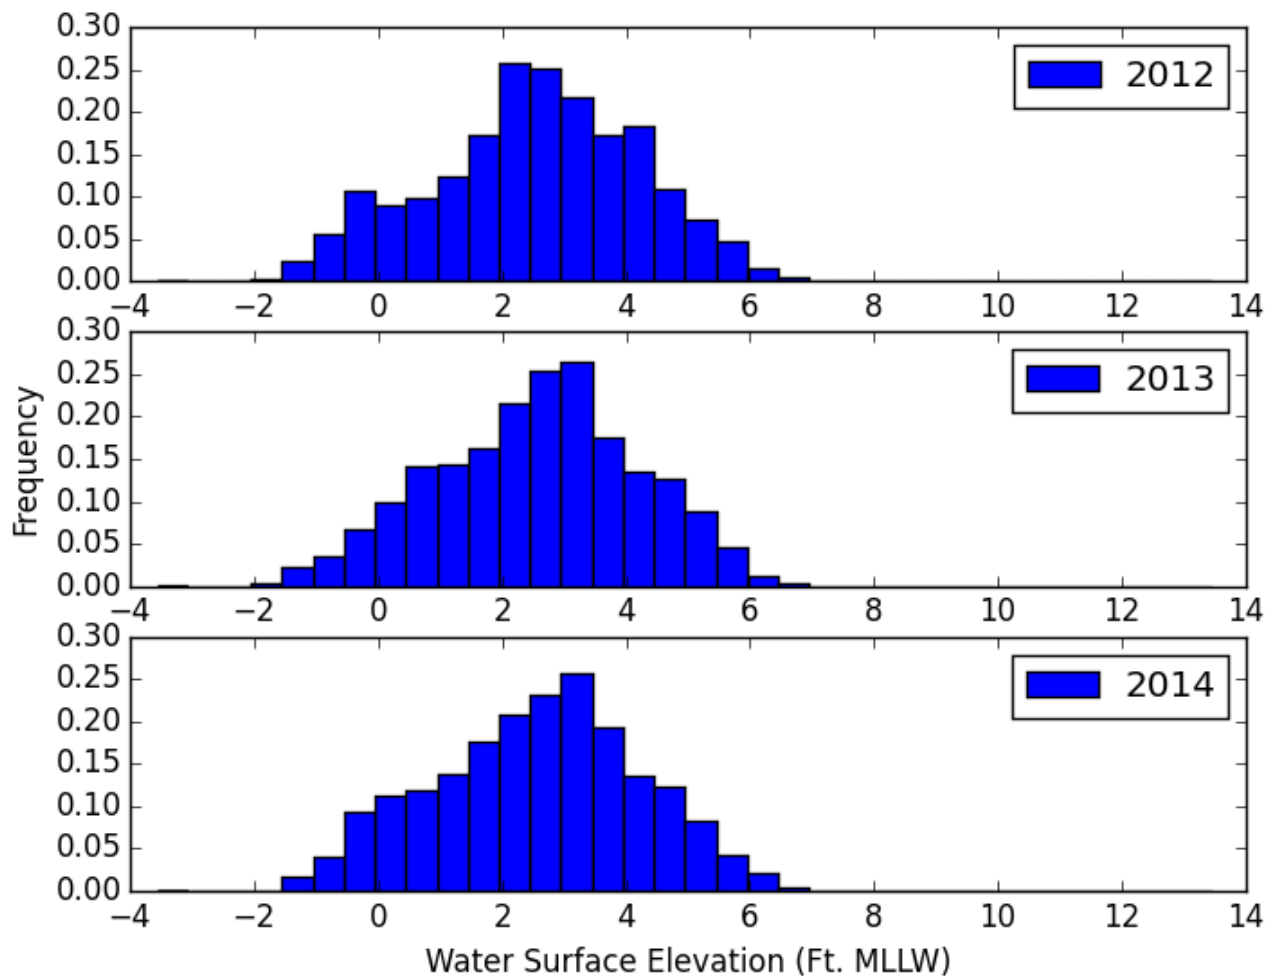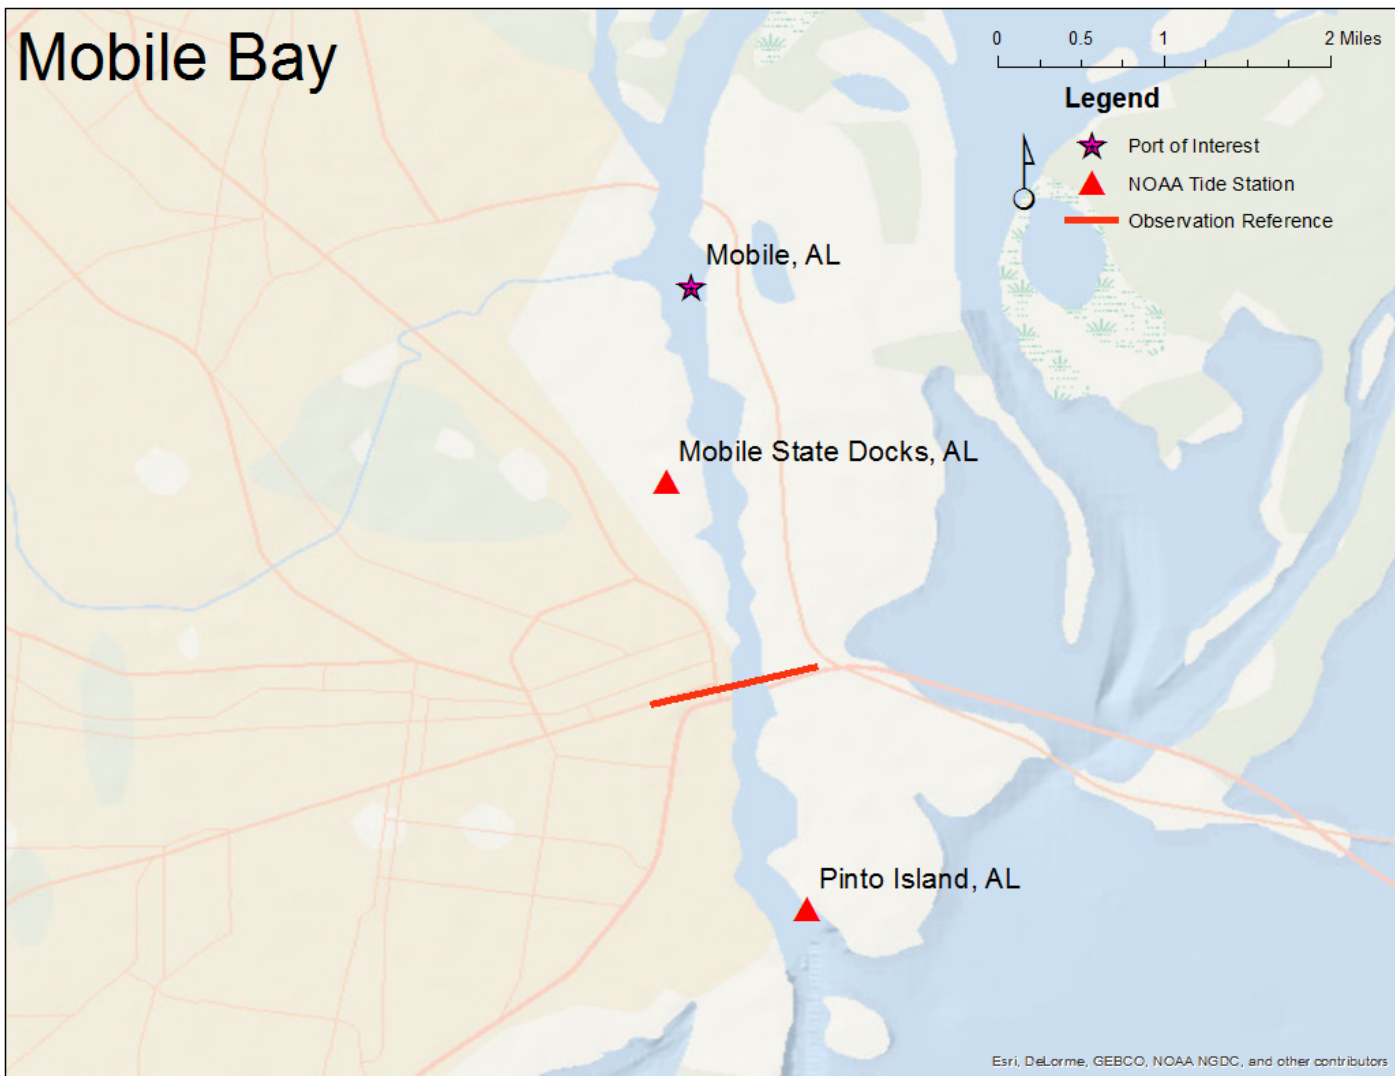
Port of Interest:	**Mobile, AL**	
Tide Station Number:	9439040	

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	2.99	0.42	1.22	0.23	0.50	0.27	0.08	702
2013	3.02	0.44	1.20	0.23	0.53	0.24	0.02	649
2014	2.93	0.45	1.19	0.24	0.48	0.28	0.09	719

Vessel Call Frequency, Mobile, AL, 2012
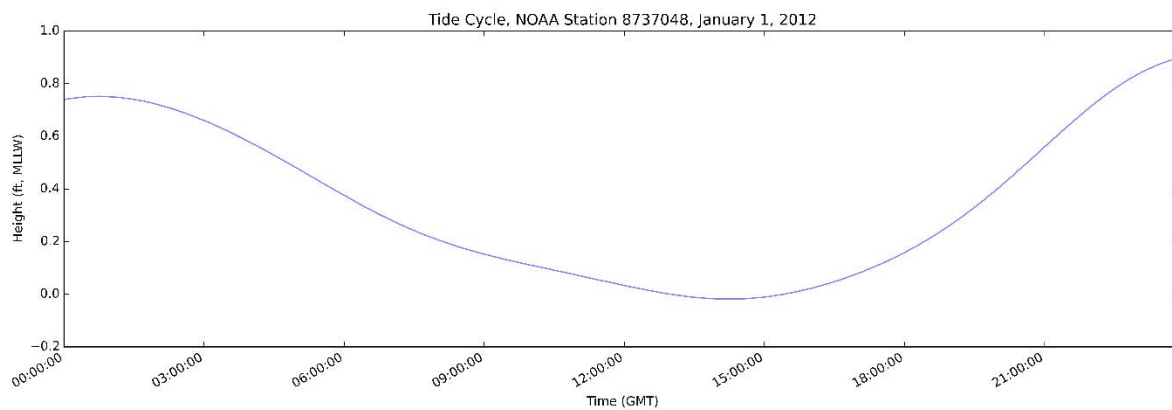
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	4	3	2	7	6	3	5	3	2	4	3	6	2	7	8	8	9	5	3	4	11	3	5	9
TUE	4	3	3	3	5	1	5	0	4	4	6	4	1	5	3	4	3	3	4	7	4	3	7	4
WED	1	6	6	9	2	2	1	2	3	3	2	2	3	3	3	3	6	6	8	6	5	5	6	7
THU	1	1	4	7	4	6	2	4	5	7	4	2	1	5	1	3	10	5	6	6	4	4	9	4
FRI	3	8	10	2	3	2	2	4	3	4	4	4	6	2	7	3	2	0	8	8	6	3	9	4
SAT	7	11	3	6	2	1	1	2	4	3	5	2	2	3	4	2	1	5	6	2	5	7	2	4
SUN	2	6	2	2	4	3	3	1	3	2	2	3	1	3	2	7	1	7	5	3	7	4	8	7

Hour (UTC)

Vessel Call Frequency, Mobile, AL, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	9	3	6	3	3	1	4	6	2	7	7	2	3	3	4	3	4	7	4	7	8	4	8	8
TUE	7	1	1	3	7	3	2	2	0	5	12	4	3	4	3	2	3	2	2	3	2	5	5	6
WED	0	3	12	4	5	2	3	5	4	5	5	3	1	2	3	4	4	5	0	5	4	5	5	6
THU	4	2	5	11	1	3	1	1	4	4	4	0	2	2	3	3	3	2	1	2	9	4	2	4
FRI	2	1	3	2	5	6	0	1	2	5	7	6	3	1	4	5	3	4	8	3	5	4	5	6
SAT	6	4	4	2	3	1	2	5	5	4	0	7	4	2	6	2	5	4	2	8	6	6	3	4
SUN	3	4	8	2	2	1	4	0	3	3	5	4	2	4	3	5	4	5	4	4	4	4	3	7

Hour (UTC)

Vessel Call Frequency, Mobile, AL, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	1	2	5	1	3	3	1	1	4	11	7	7	6	6	5	4	6	8	8	5	2	8	7
TUE	4	3	5	4	9	4	3	5	10	0	5	4	1	4	5	4	3	5	2	7	6	4	3	3
WED	3	4	4	1	1	2	5	3	6	2	8	3	4	3	3	5	6	5	5	10	9	5	6	1
THU	2	4	7	4	5	3	3	7	3	3	9	8	5	4	4	5	4	5	6	3	1	9	4	4
FRI	6	6	5	1	3	6	5	2	3	5	6	4	1	4	5	5	3	6	4	6	7	4	0	2
SAT	2	1	4	2	3	2	2	3	5	3	2	8	4	3	6	4	4	4	2	5	3	4	5	2
SUN	1	6	9	6	3	2	1	3	2	3	3	6	4	3	5	6	5	9	5	6	2	2	5	5

Hour (UTC)

Mobile, AL Interarrival Times
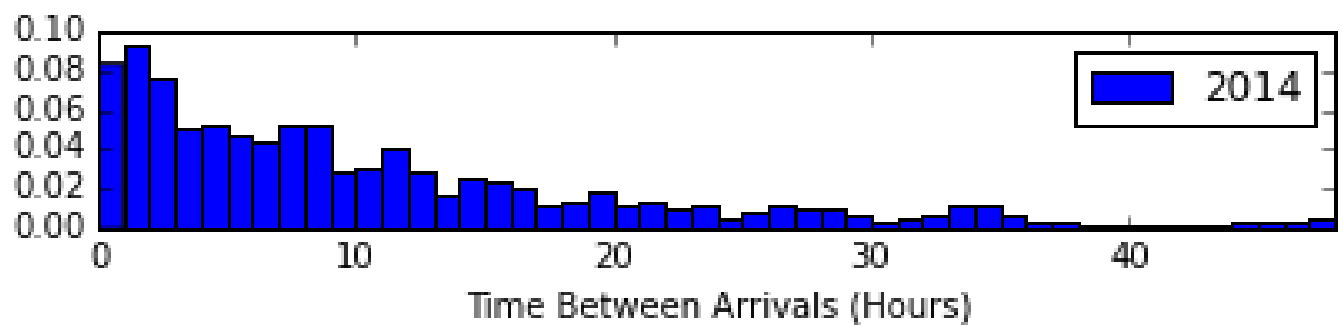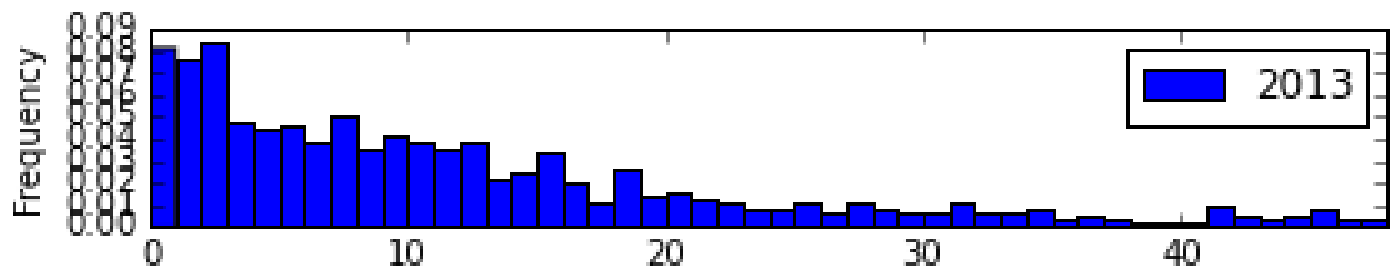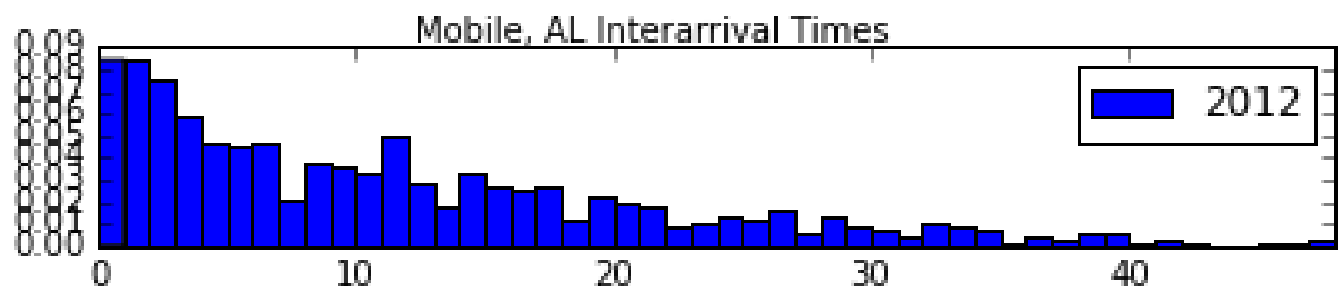
Mobile, AL Vessel Arrival Water Surface Elevation

New Haven

| | | | | 0 | 0.5 | 1 | 2 Miles |

Legend
- ⭐ Port of Interest
- 🔺 NOAA Tide Station
- ▬ Observation Reference

New Haven, CT ⭐

New Haven, CT 🔺

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
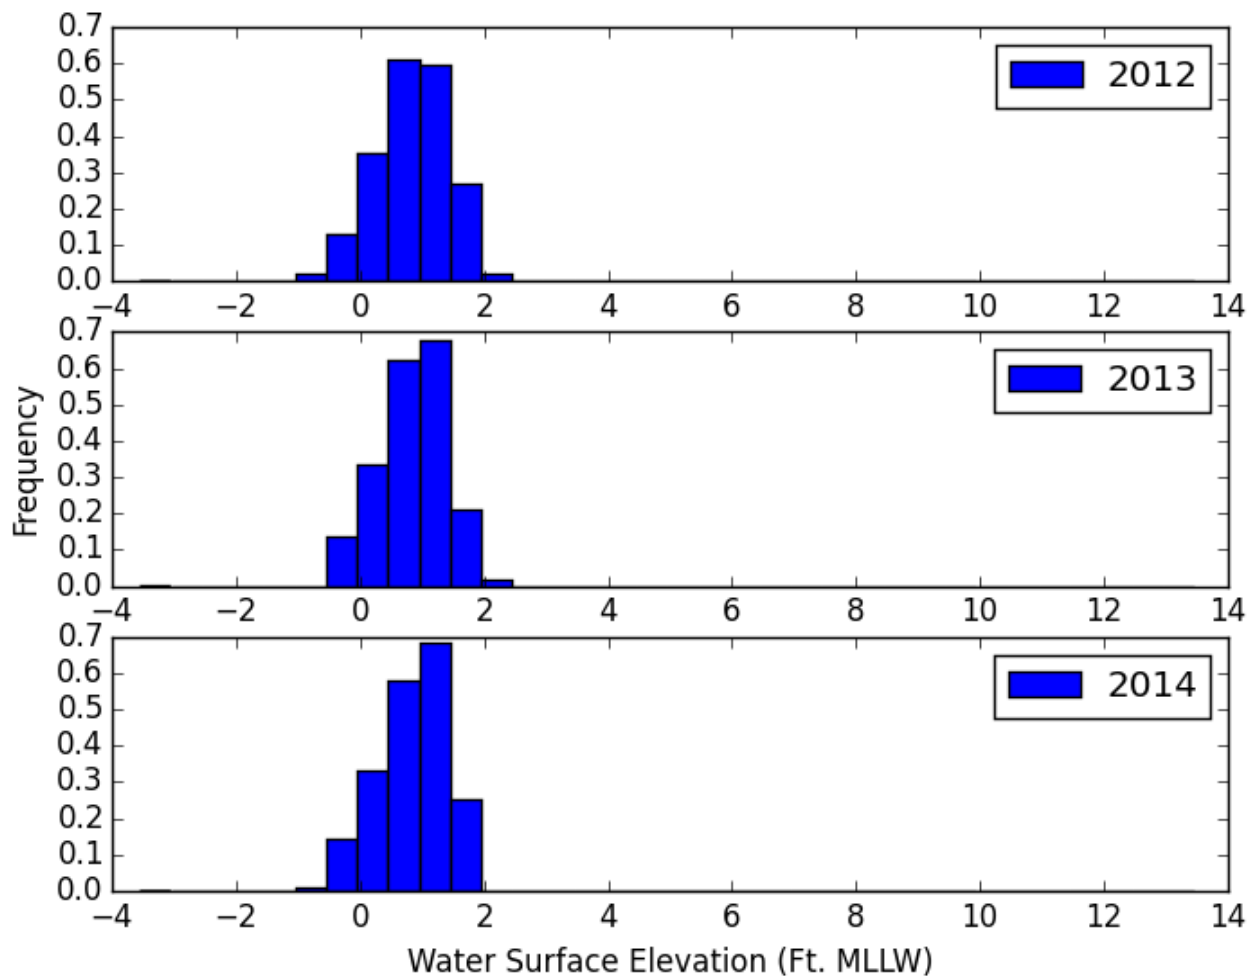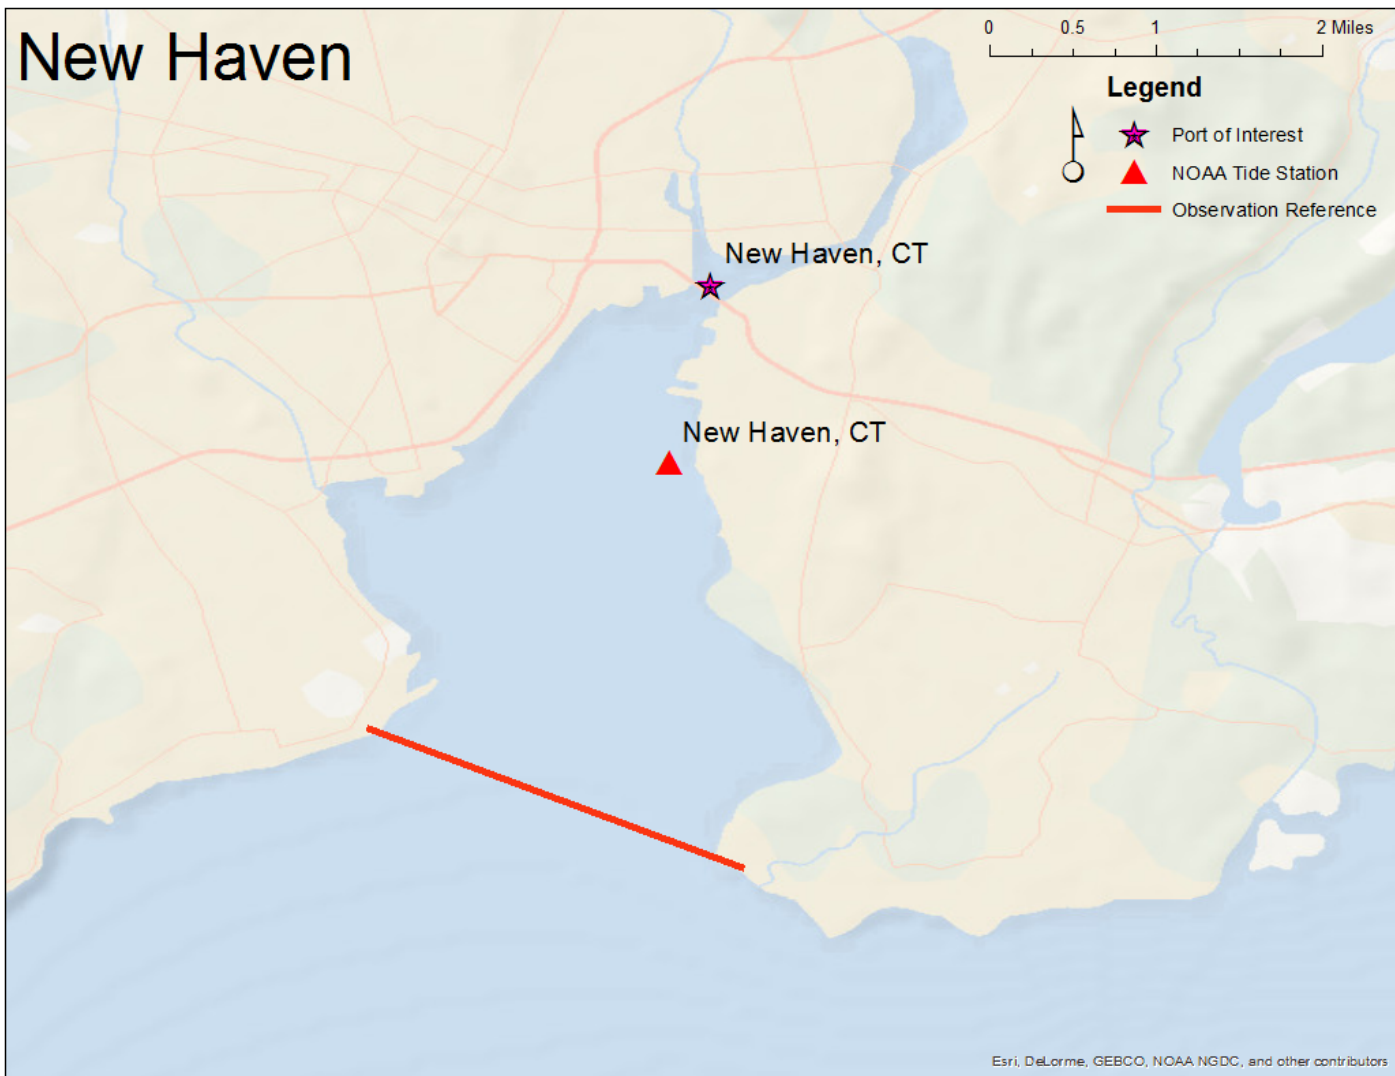
Port of Interest: New Haven, CT
Tide Station Number: 8465705

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	9.14	1.28	5.34	0.17	0.46	0.36	0.41	121
2013	9.05	1.25	5.37	0.20	0.51	0.29	0.19	143
2014	9.20	1.23	5.39	0.19	0.48	0.32	0.26	149

Tide Cycle, NOAA Station 8465705, January 1, 2012
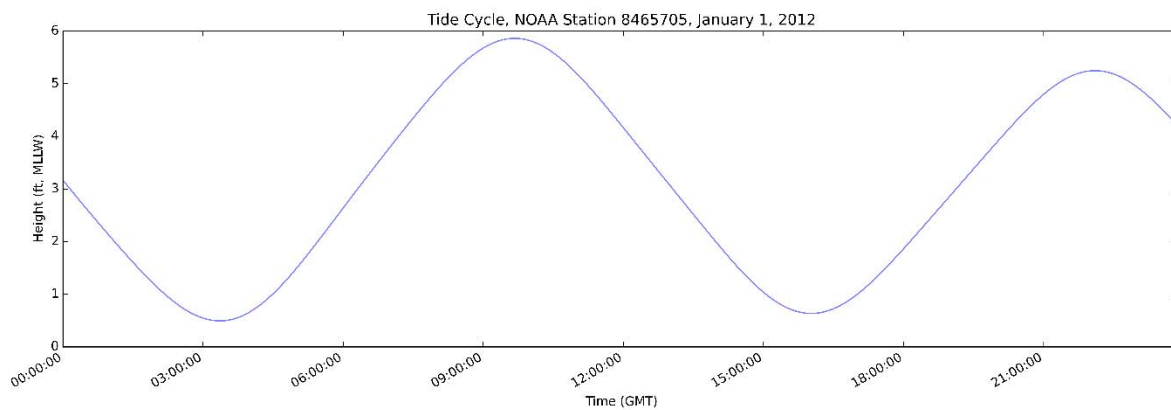
Vessel Call Frequency, New Haven, CT, 2012

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	2	0	1	0	0	1	1	0	0	1	0	3	0	0	0	1	1	1	1	1	0	1	0	2
TUE	2	0	1	0	1	0	2	1	0	0	0	0	2	1	1	1	2	1	0	0	0	1	3	1
WED	1	0	0	0	0	0	1	1	1	1	0	1	0	0	1	1	0	0	1	2	0	2	1	0
THU	0	1	3	1	1	0	0	2	1	1	1	1	1	0	0	0	1	1	1	0	2	0	1	0
FRI	3	1	1	0	0	1	0	0	1	2	0	0	1	0	1	0	0	1	0	0	0	0	1	3
SAT	0	1	0	0	2	0	0	2	1	0	2	0	0	1	0	1	2	1	1	1	1	0	1	0
SUN	1	1	0	0	0	2	0	1	0	0	1	1	1	0	1	0	1	4	1	0	2	1	0	0

Hour (UTC)

Vessel Call Frequency, New Haven, CT, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	1	2	0	1	3	1	0	1	1	0	2	0	0	0	3	1	0	1	1	2	1	0	0	3
TUE	0	0	1	0	0	1	0	0	2	3	0	1	0	2	0	2	3	0	1	0	2	0	1	0
WED	1	0	2	2	1	0	2	1	2	0	2	1	3	1	0	0	0	0	0	1	1	0	0	2
THU	3	1	0	0	0	0	0	0	2	1	2	0	1	1	1	0	2	0	0	2	0	1	0	1
FRI	0	2	1	0	1	0	0	1	2	0	1	1	0	1	0	2	1	0	3	1	0	1	1	2
SAT	2	0	5	0	0	0	1	1	1	0	2	0	0	0	2	3	1	0	0	1	0	2	1	2
SUN	2	1	1	0	1	0	1	0	1	2	1	0	1	0	0	1	0	0	0	0	1	0	1	1

Hour (UTC)

Vessel Call Frequency, New Haven, CT, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	0	1	1	0	1	1	0	2	3	1	2	4	1	0	0	2	2	0	0	1	0	1	2	0
TUE	3	0	0	0	1	1	0	1	3	1	1	1	0	0	0	0	0	1	3	1	1	1	2	2
WED	4	2	1	0	2	1	0	0	2	0	2	0	0	1	1	0	0	0	0	4	0	0	0	2
THU	1	0	0	1	0	1	1	0	0	1	1	2	0	0	1	1	3	2	0	1	0	3	2	1
FRI	1	0	2	0	2	0	0	0	0	1	1	0	1	0	2	1	0	1	0	0	1	1	0	0
SAT	0	0	2	2	0	1	0	0	4	0	0	2	0	1	0	0	0	2	0	0	1	0	1	1
SUN	1	3	0	5	1	0	1	1	0	0	0	2	1	0	0	1	2	1	0	0	5	1	0	1

Hour (UTC)

New Haven, CT Interarrival Times
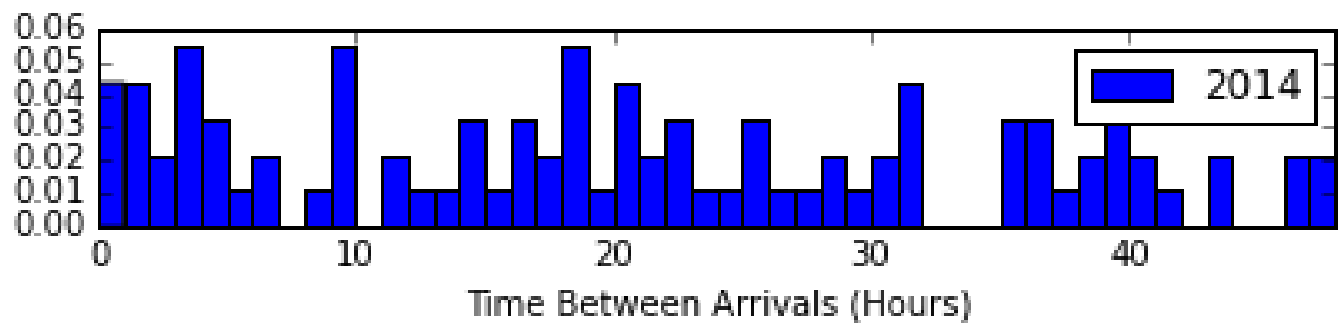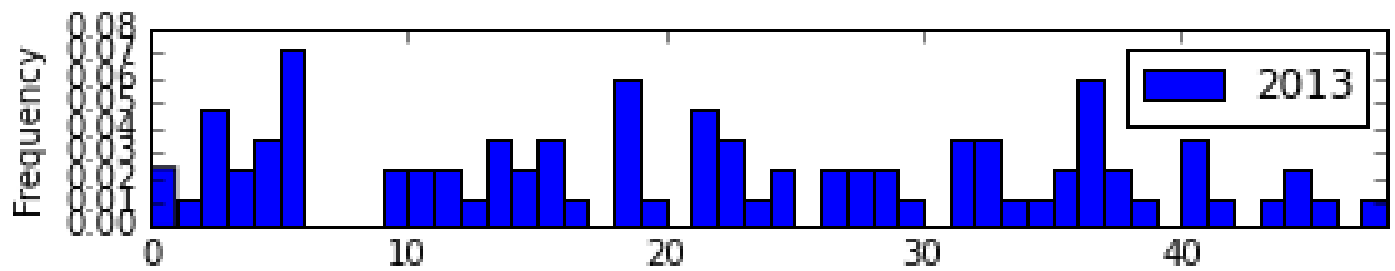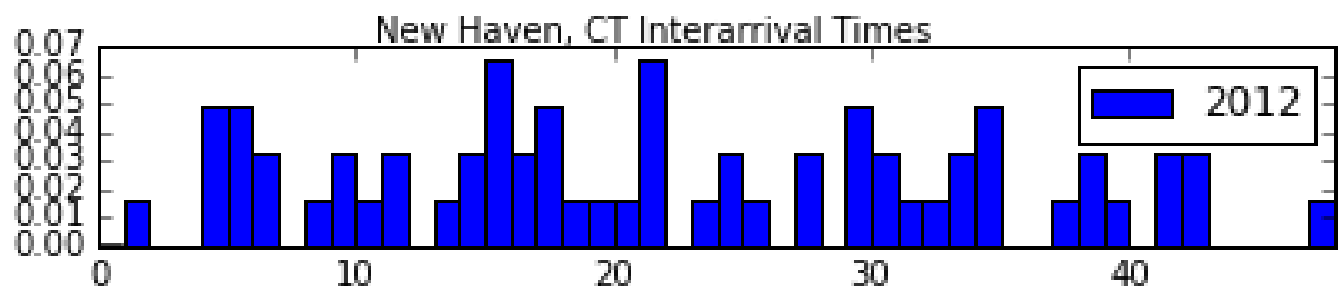
New Haven, CT Vessel Arrival Water Surface Elevation

New York & New Jersey

New York, NY and NJ

Sandy Hook, NJ
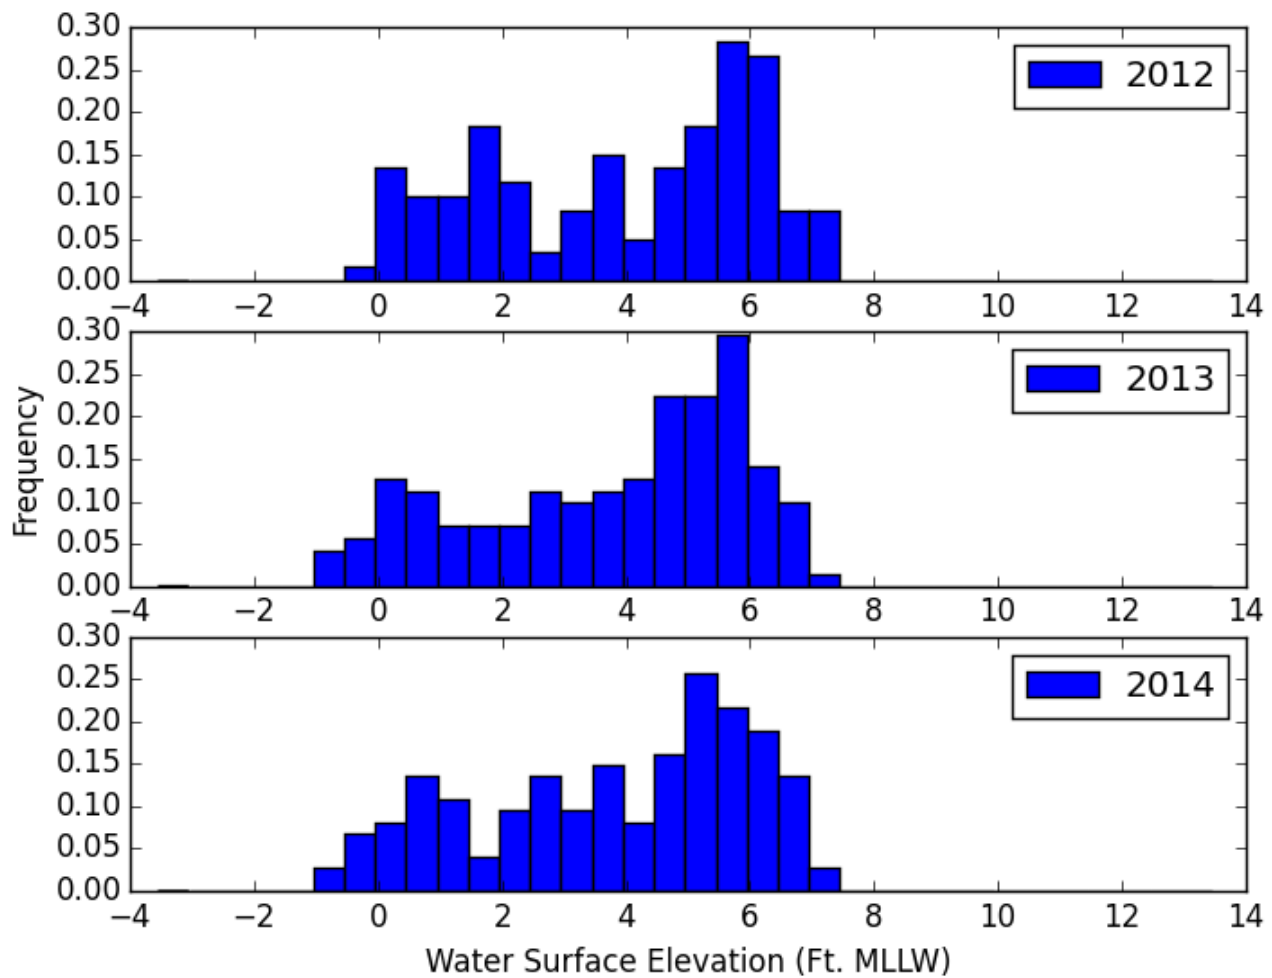
Port of Interest: New York & New Jersey

Tide Station Number: 8531680

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	7.68	1.04	4.09	0.26	0.49	0.24	-0.04	4817
2013	7.79	1.03	4.11	0.26	0.48	0.26	0.00	4537
2014	7.88	1.01	4.14	0.25	0.49	0.26	0.01	4471

Tide Cycle, NOAA Station 8531680, January 1, 2012
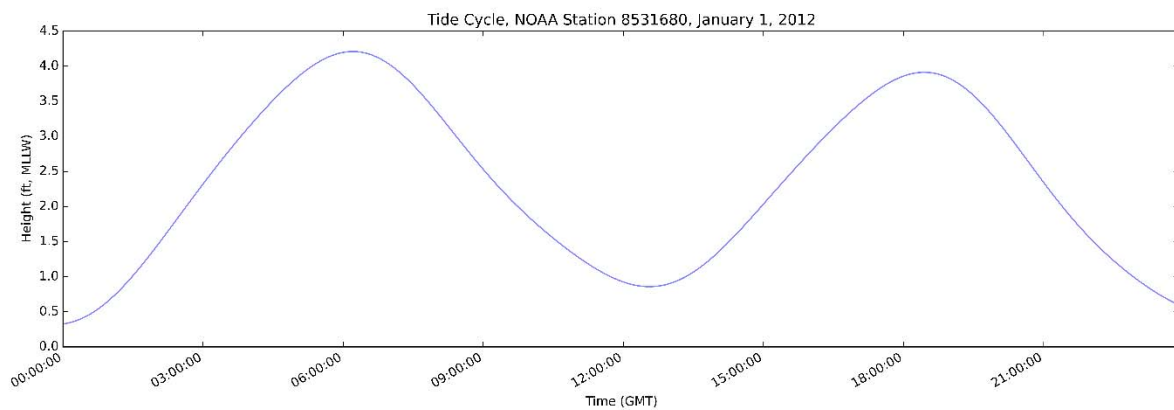
Vessel Call Frequency, New York & New Jersey, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	34	17	15	19	4	18	15	14	87	106	66	32	26	35	65	32	24	25	23	35	34	38	21	21
TUE	22	20	16	16	16	10	15	15	59	82	54	24	23	22	38	46	24	15	13	24	24	40	24	14
WED	19	25	15	16	18	15	14	12	38	81	54	25	23	27	34	23	26	19	23	22	25	30	26	31
THU	16	15	17	14	10	16	22	12	53	45	46	30	17	28	45	38	23	23	20	27	42	35	28	24
FRI	19	21	19	13	12	13	10	8	47	86	53	34	29	34	18	29	22	23	26	23	23	34	24	18
SAT	16	22	15	19	9	13	11	11	50	65	45	26	37	33	47	37	19	22	23	32	42	36	17	16
SUN	17	17	17	17	18	16	4	13	67	145	72	45	22	38	39	19	19	13	26	24	35	35	26	23

Hour (UTC)

Vessel Call Frequency, New York & New Jersey, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	23	13	12	11	10	7	8	11	85	120	57	33	14	29	43	33	27	18	22	38	48	39	23	16
TUE	22	11	8	13	10	3	10	9	62	81	44	21	12	33	40	32	21	24	16	23	34	28	14	21
WED	28	25	16	8	13	14	7	16	58	91	71	31	22	27	34	31	20	23	17	22	27	36	22	27
THU	15	19	23	16	7	19	14	16	57	68	49	28	19	52	55	26	19	19	16	20	42	24	17	16
FRI	14	25	10	21	7	11	11	7	71	65	43	19	27	20	38	33	15	24	24	43	43	23	27	24
SAT	17	12	14	16	11	12	14	10	56	64	39	17	19	17	37	36	32	20	29	17	23	34	16	11
SUN	18	18	15	18	8	8	14	10	62	85	29	25	9	31	40	26	28	16	22	27	49	43	28	16

Hour (UTC)

Vessel Call Frequency, New York & New Jersey, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	20	17	20	14	6	8	9	11	73	119	65	22	19	34	31	35	9	7	21	23	36	31	15	22
TUE	18	11	13	12	11	11	6	12	66	75	47	19	22	27	53	38	24	15	16	32	38	30	31	14
WED	21	20	18	13	20	10	7	25	65	102	53	30	33	21	28	31	25	22	24	31	36	30	30	25
THU	21	18	12	10	21	13	10	12	51	72	44	24	21	52	54	36	22	16	15	32	32	23	24	14
FRI	20	15	25	12	10	8	9	7	43	64	31	28	28	22	44	24	17	23	16	31	45	22	18	24
SAT	25	20	12	7	16	13	7	6	49	91	39	16	29	28	65	38	13	16	17	23	45	26	14	16
SUN	9	10	13	11	10	9	7	7	49	65	24	21	15	27	32	20	13	17	21	29	53	52	34	29

Hour (UTC)

New York & New Jersey Interarrival Times
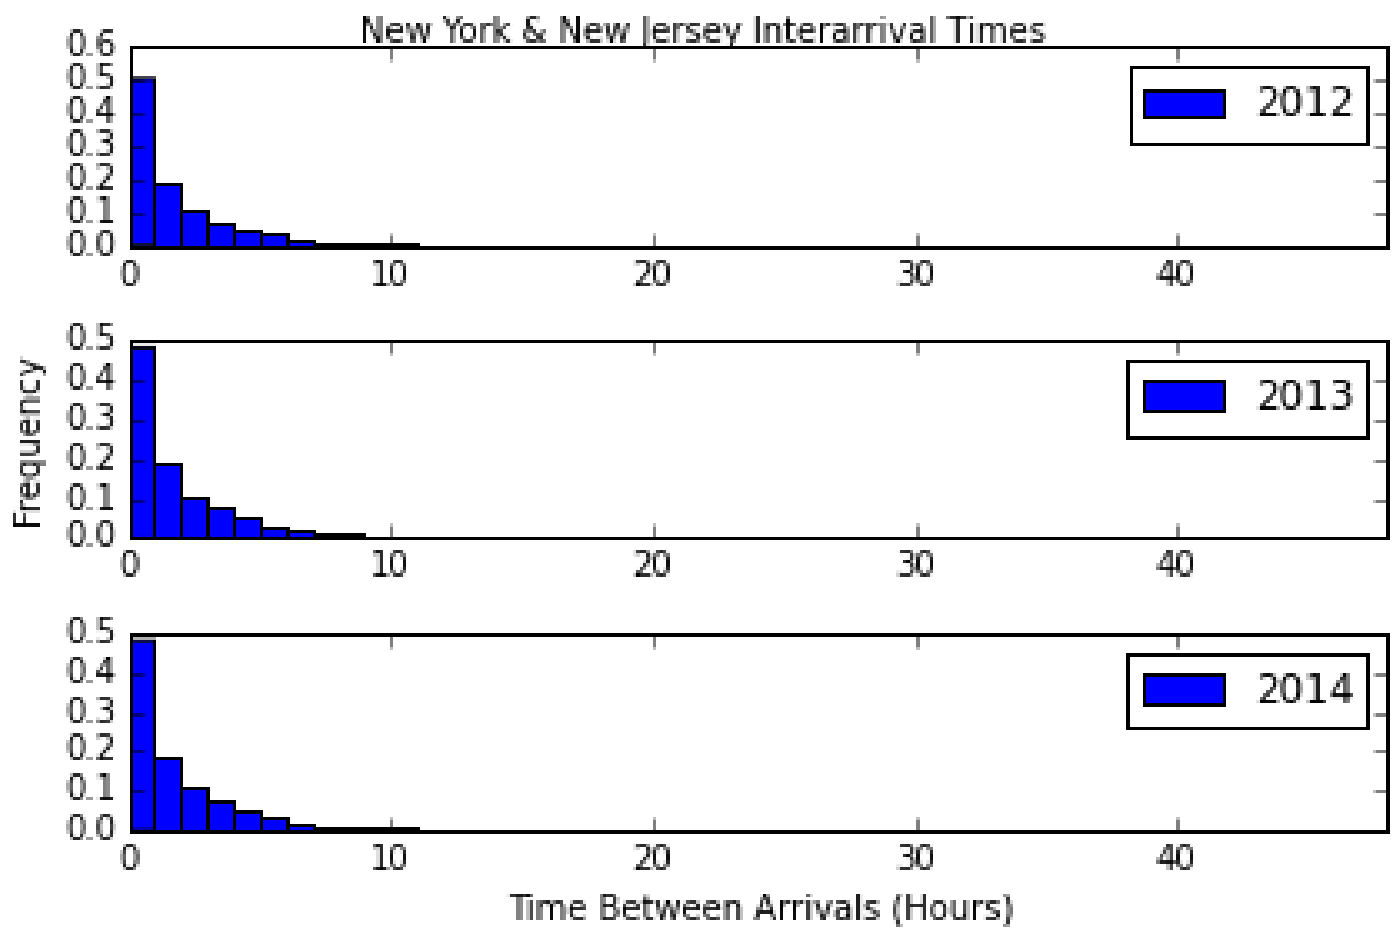
New York & New Jersey Vessel Arrival Water Surface Elevation

Norfolk

| | | 0 | 2 | 4 | 8 Miles |

Legend
- ★ Port of Interest
- ▲ NOAA Tide Station
- ━━ Observation Reference

Newport News, VA

Norfolk

Sewells Point, VA

Norfolk Harbor, VA

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
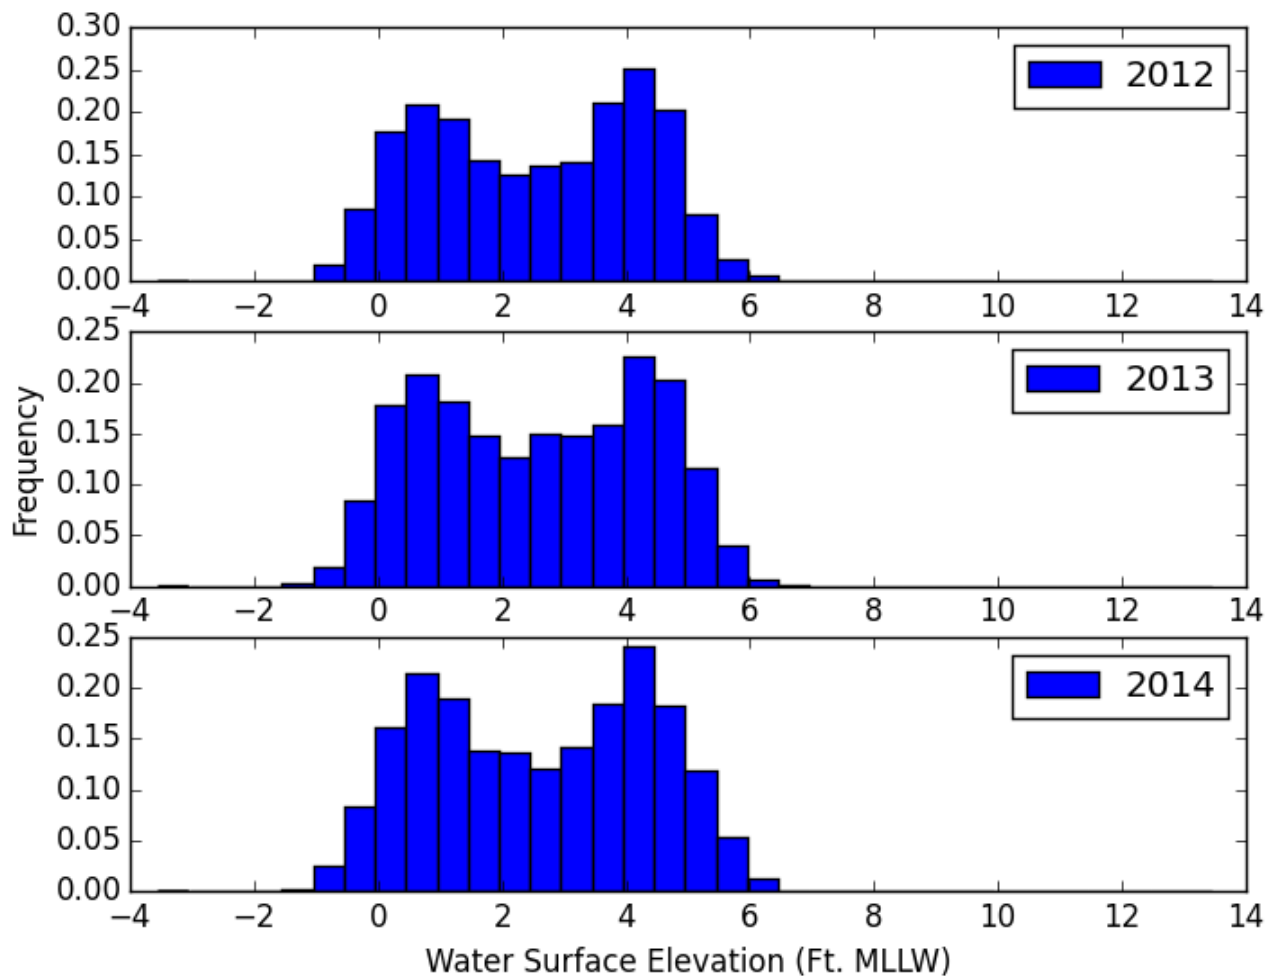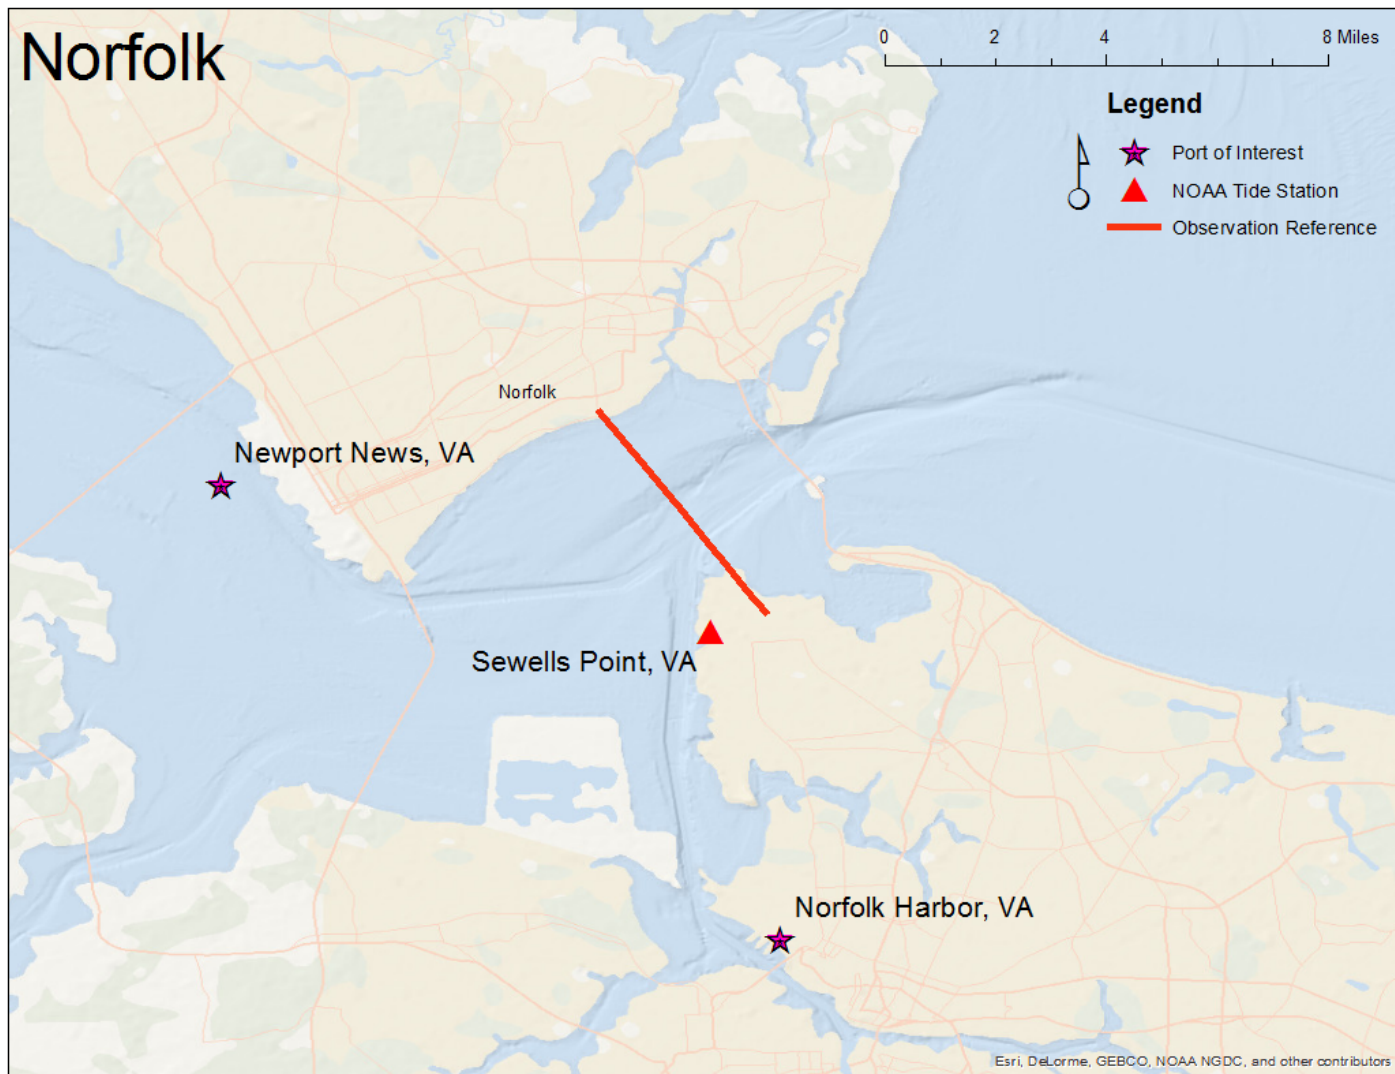
Port of Interest: **Norfolk, VA**

Tide Station Number: 8638610

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	4.12	0.52	2.16	0.25	0.52	0.23	-0.05	4078
2013	4.02	0.52	2.16	0.25	0.54	0.21	-0.08	3987
2014	4.21	0.51	2.18	0.25	0.51	0.24	-0.02	3901

Tide Cycle, NOAA Station 8638610, January 1, 2012
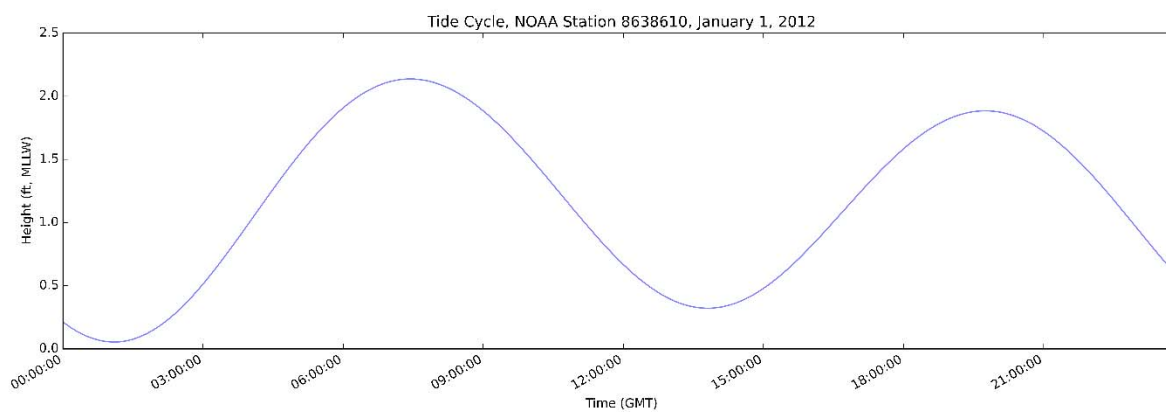
Vessel Call Frequency, Norfolk, VA, 2012

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	15	42	29	20	15	14	12	11	29	85	57	30	16	11	28	16	23	20	18	17	44	28	31	31
TUE	22	22	32	28	16	13	6	24	39	65	41	18	21	17	17	16	15	16	17	20	28	21	28	16
WED	16	16	19	16	17	14	12	23	40	54	39	17	18	10	20	23	21	9	26	33	35	29	20	18
THU	14	22	19	20	13	19	11	12	33	57	29	26	24	13	19	30	19	13	16	15	25	23	22	30
FRI	13	22	25	19	18	16	14	13	35	47	39	13	17	15	23	11	13	10	18	32	39	39	35	22
SAT	10	21	20	20	25	20	19	14	35	60	44	30	18	14	27	31	21	20	26	25	36	38	29	33
SUN	16	20	32	12	21	11	11	19	41	69	48	26	19	19	21	26	18	12	13	23	55	42	31	20

Vessel Call Frequency, Norfolk, VA, 2013

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	16	17	16	14	11	14	11	8	41	82	56	27	17	12	15	21	25	21	27	18	32	29	26	29
TUE	15	26	23	15	19	15	22	21	37	56	48	29	15	23	29	30	17	17	20	17	34	26	26	20
WED	15	15	18	17	16	10	17	16	50	59	42	19	19	24	36	21	16	12	22	22	42	25	20	13
THU	13	18	19	14	17	13	22	19	57	65	57	22	17	19	20	16	27	15	21	17	32	33	16	28
FRI	18	13	31	20	15	12	11	16	34	35	38	14	18	19	24	18	10	9	18	20	32	30	26	19
SAT	14	20	12	12	16	12	13	22	45	44	45	15	18	20	52	34	17	15	22	22	37	36	25	26
SUN	18	11	24	15	14	15	18	14	36	43	40	25	15	19	27	18	18	17	25	21	30	35	27	20

Vessel Call Frequency, Norfolk, VA, 2014

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	19	16	19	10	15	10	8	15	35	64	44	17	15	14	26	25	17	23	11	26	42	44	26	20
TUE	14	25	23	15	12	14	10	12	43	57	32	23	9	25	32	26	24	15	26	18	37	33	20	13
WED	15	9	27	13	10	10	12	8	28	67	30	21	17	18	14	31	17	13	18	25	34	38	24	12
THU	15	24	24	20	12	18	9	18	50	72	34	19	9	22	25	21	12	11	12	17	36	44	29	13
FRI	19	17	33	15	20	7	9	14	33	56	30	20	18	26	28	24	12	17	17	19	31	28	27	27
SAT	10	15	20	12	21	10	13	20	38	57	37	31	14	17	61	29	17	8	22	24	56	36	20	10
SUN	13	25	16	14	22	14	21	24	49	44	36	21	26	24	30	19	22	16	12	15	35	33	12	17

Norfolk, VA Interarrival Times
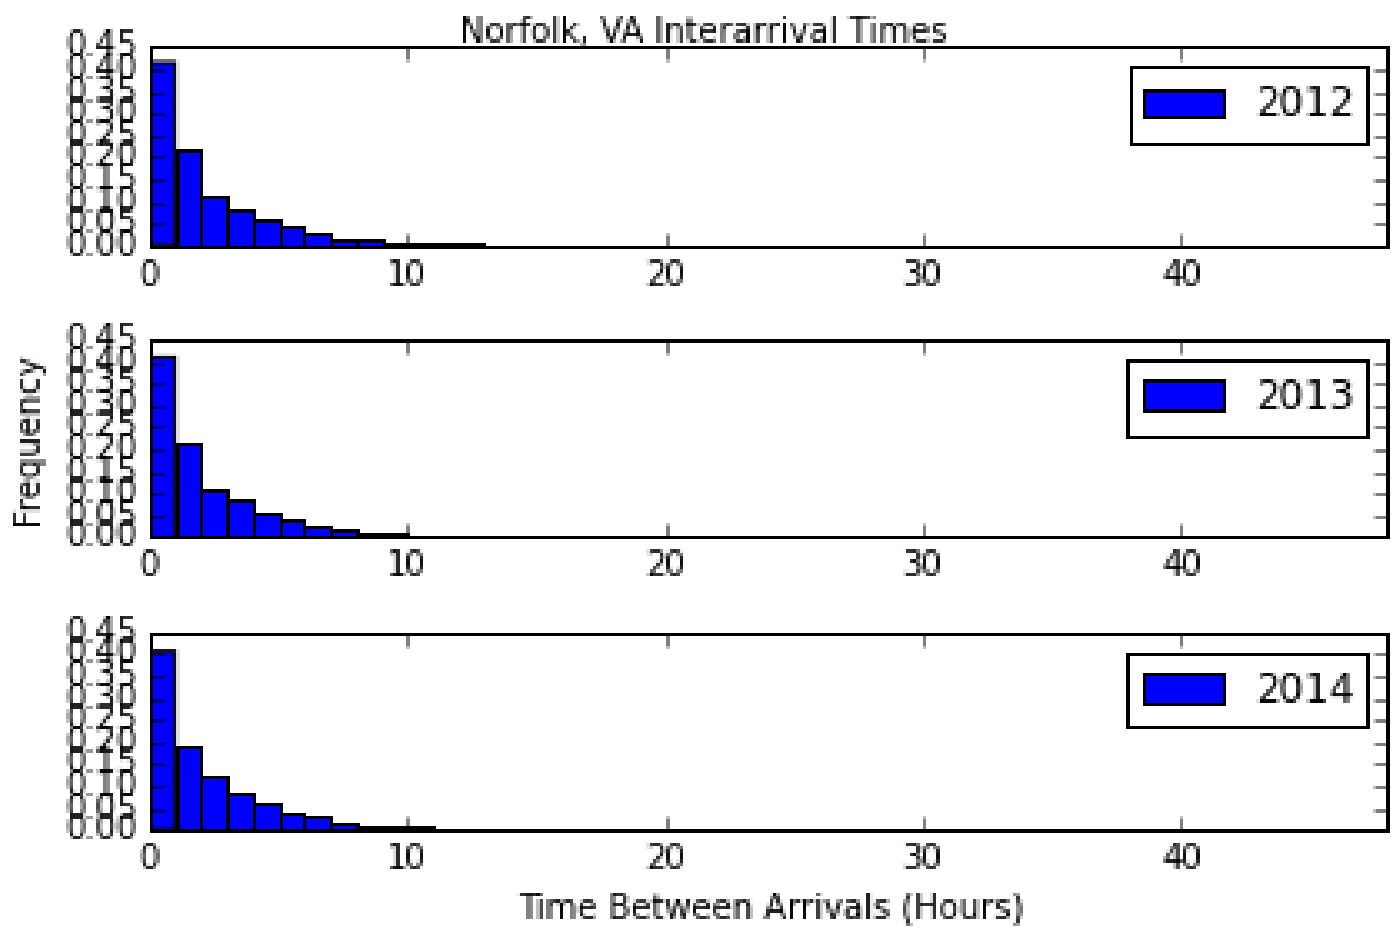
Norfolk, VA Vessel Arrival Water Surface Elevation

Pascagoula

Pascagoula NOAA Lab, MS

Pascagoula, MS

Pascagoula

Legend

⭐ Port of Interest

🔺 NOAA Tide Station

▬ Observation Reference

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
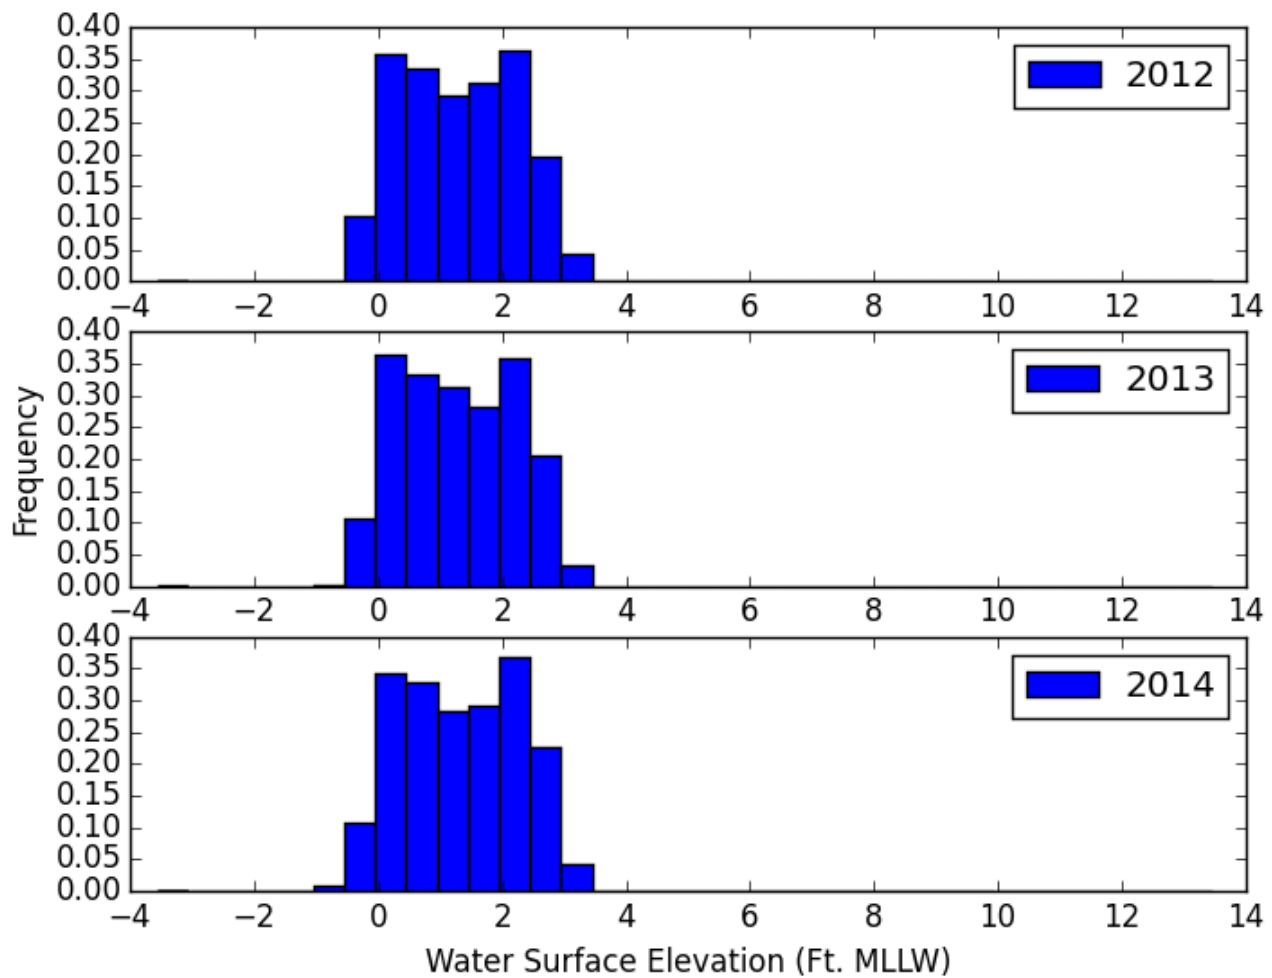
Port of Interest:	Pascagoula, MS
Tide Station Number:	8741533

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	3.11	0.35	1.15	0.23	0.53	0.25	0.04	727
2013	3.03	0.37	1.14	0.22	0.51	0.27	0.09	845
2014	2.86	0.38	1.13	0.23	0.54	0.24	0.02	719

Tide Cycle, NOAA Station 8741533, January 1, 2012

Vessel Call Frequency, Pascagoula, MS, 2012
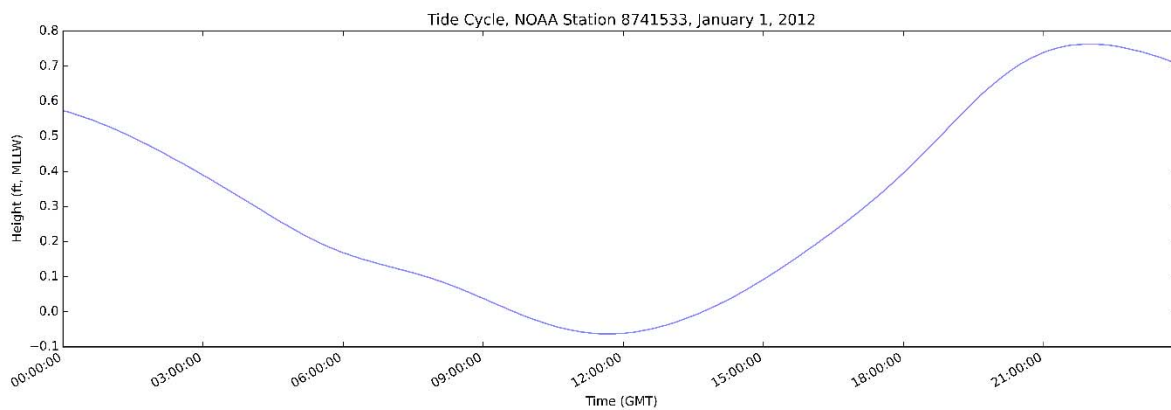
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	4	2	4	4	3	3	2	1	3	1	1	1	1	6	9	8	8	11	2	6	3	3	8	7
TUE	6	3	5	1	1	4	2	4	3	2	2	0	4	4	10	7	6	4	13	5	6	8	8	10
WED	5	1	1	5	2	2	1	1	2	4	2	1	4	3	10	11	5	6	6	3	3	4	10	6
THU	4	3	1	4	2	2	1	0	0	2	0	0	4	5	10	10	4	1	6	7	2	11	7	5
FRI	2	4	3	2	1	0	1	2	2	2	1	4	4	4	11	12	4	4	4	9	11	6	5	7
SAT	3	5	2	3	4	0	1	2	0	4	0	3	6	2	16	4	7	7	5	8	4	7	8	10
SUN	1	3	2	1	3	5	1	0	2	1	2	1	4	3	12	6	9	6	5	6	9	8	7	6

Hour (UTC)

Vessel Call Frequency, Pascagoula, MS, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	5	3	0	5	2	2	3	3	4	1	3	5	7	7	8	9	8	9	5	8	8	6	7
TUE	2	2	3	1	4	2	3	1	0	5	1	2	7	7	13	11	5	9	10	7	10	10	11	8
WED	9	4	3	3	4	1	3	0	4	5	1	5	7	8	7	8	5	6	10	7	2	11	5	7
THU	4	2	0	7	2	1	0	1	2	1	4	2	11	5	13	18	6	4	5	6	4	4	11	3
FRI	4	5	4	5	2	4	3	1	1	5	3	1	7	10	5	13	8	7	4	6	8	6	2	4
SAT	7	1	2	2	3	1	1	3	1	2	1	3	12	6	15	10	1	3	9	6	3	6	7	5
SUN	3	4	2	2	3	0	1	3	2	2	2	3	4	5	12	8	5	4	7	12	8	13	7	4

Hour (UTC)

Vessel Call Frequency, Pascagoula, MS, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	4	2	2	2	4	3	1	4	2	3	4	1	3	13	11	2	6	11	6	9	3	3	4	7
TUE	5	4	3	2	4	1	2	1	2	3	0	2	4	12	15	9	6	5	3	5	4	6	4	2
WED	0	2	3	5	4	4	1	2	3	4	1	2	6	11	7	6	7	5	6	9	5	2	2	5
THU	7	0	2	3	0	5	1	2	1	0	1	3	9	5	7	7	5	5	10	6	8	7	7	6
FRI	7	1	6	1	2	1	3	0	3	4	2	1	5	9	8	6	4	6	5	5	6	3	8	3
SAT	1	1	1	3	1	6	7	1	2	4	5	3	4	7	8	8	2	5	12	4	5	5	4	7
SUN	4	5	1	2	5	1	2	1	2	0	3	1	7	5	7	7	8	3	3	5	4	6	5	4

Hour (UTC)

Pascagoula, MS Interarrival Times
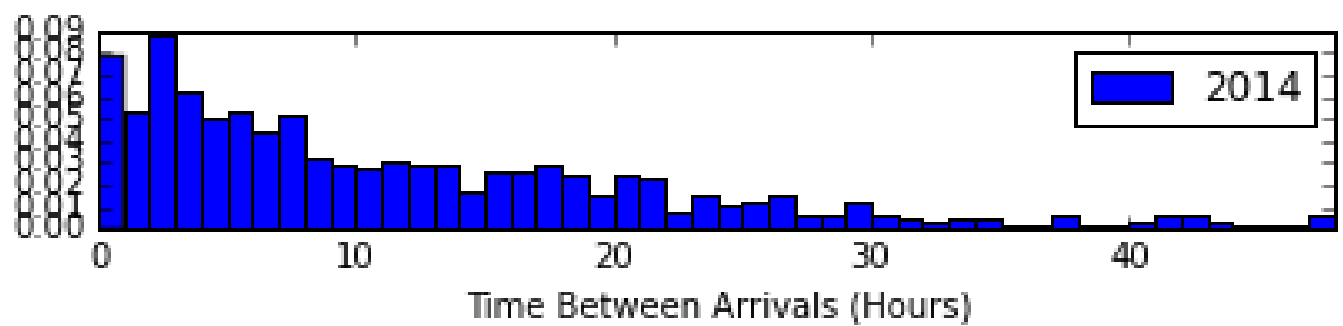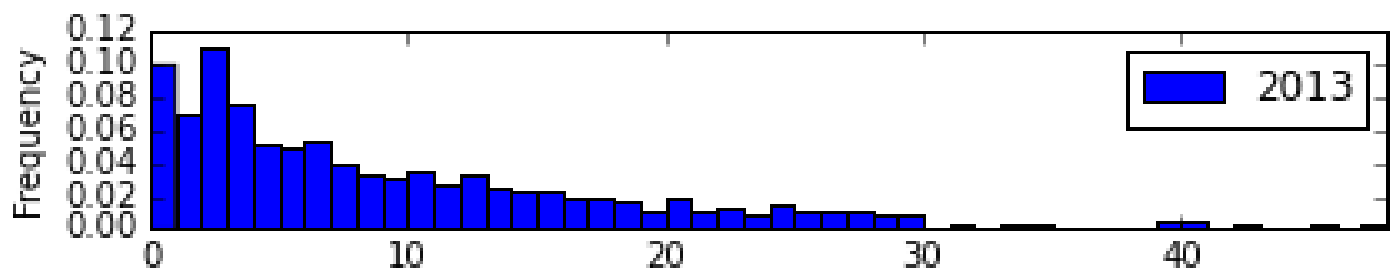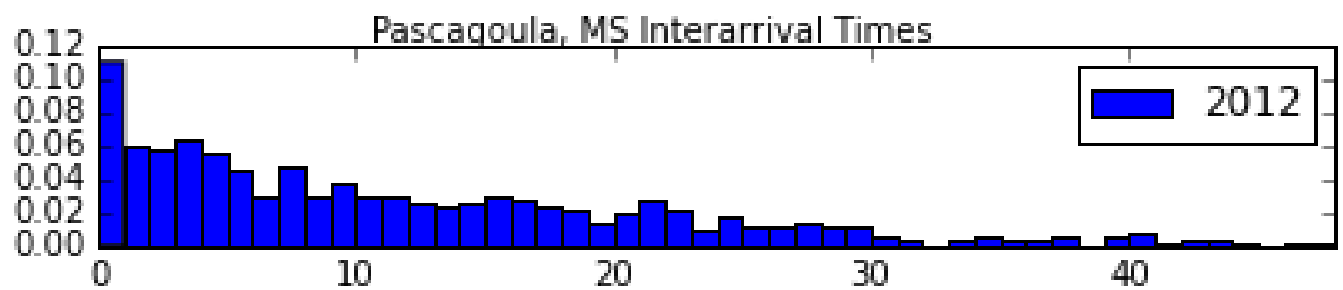
Pascagoula, MS Vessel Arrival Water Surface Elevation

Port Everglades

Port Everglades, FL

Port Everglades, FL

Virginia Key, FL

Legend

★ Port of Interest

▲ NOAA Tide Station

━ Observation Reference

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
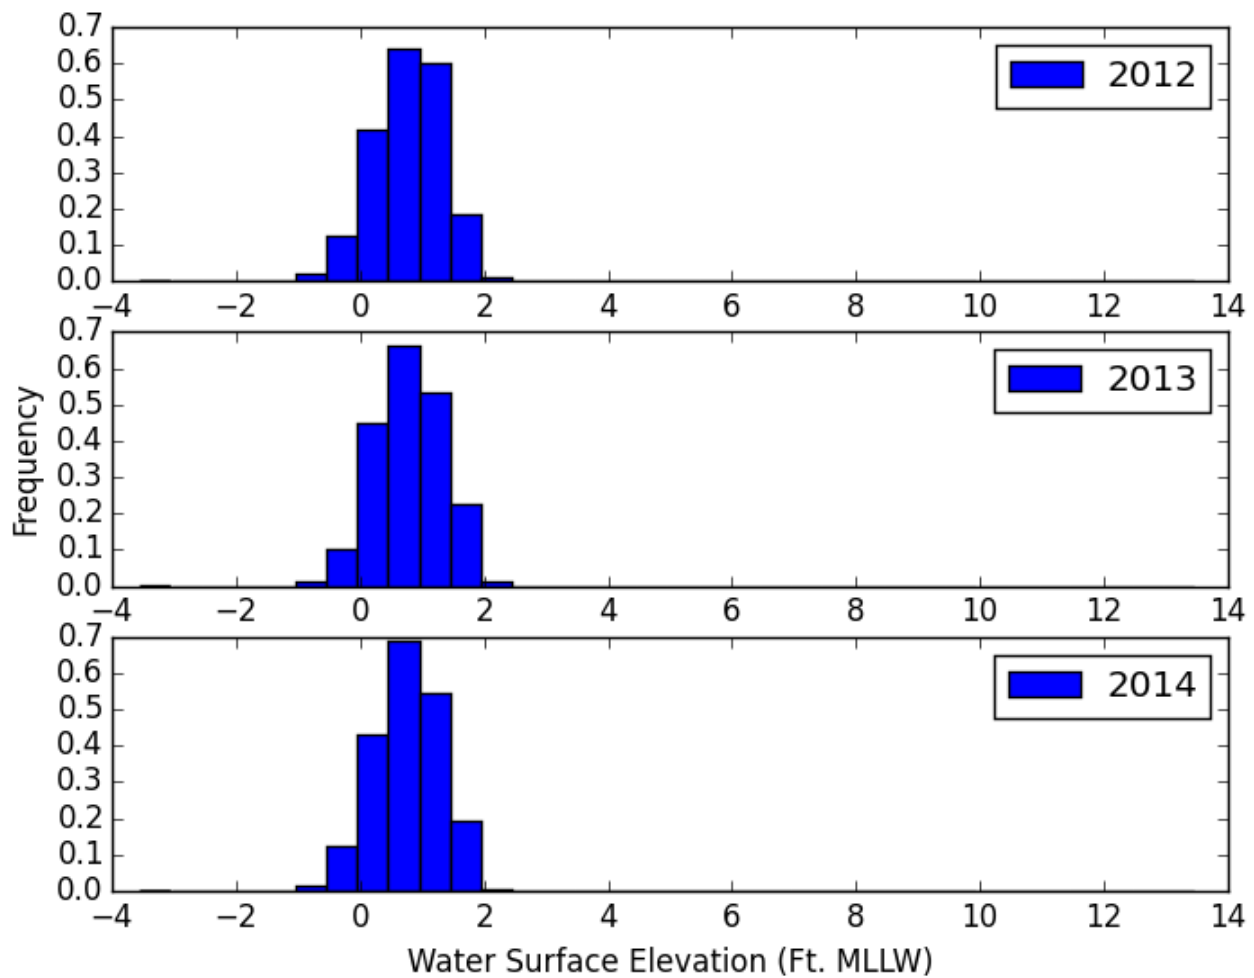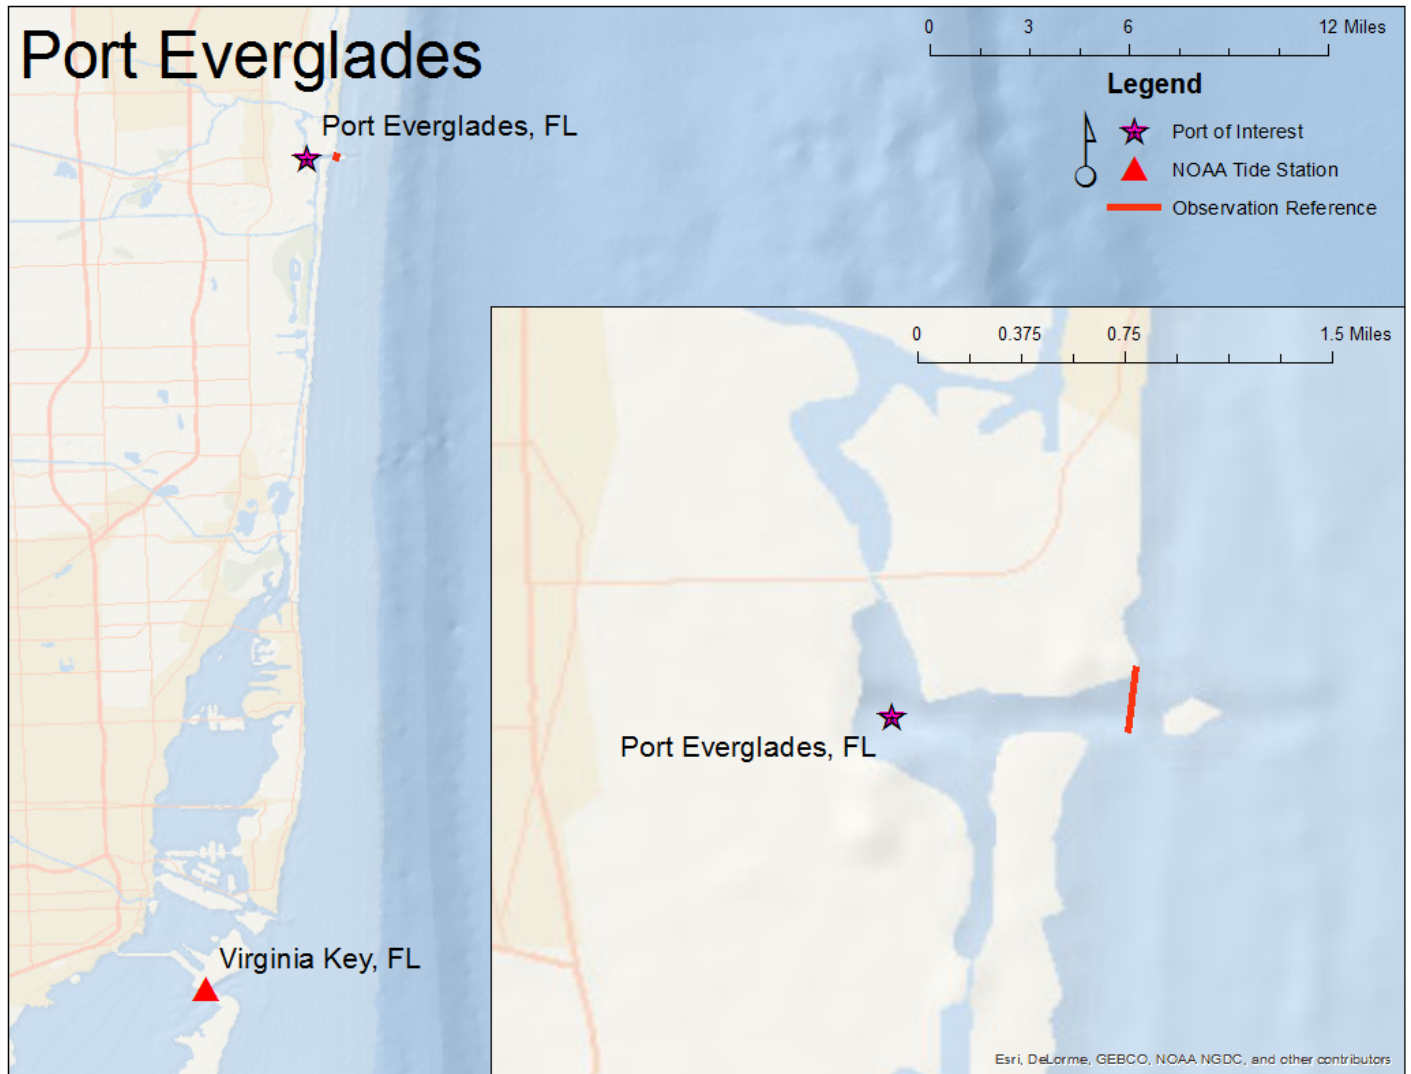
Port of Interest: Port Everglades, FL

Tide Station Number: 8723214

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	3.62	0.44	1.76	0.24	0.50	0.25	0.01	3115
2013	3.57	0.44	1.76	0.26	0.49	0.25	-0.03	3081
2014	3.80	0.43	1.76	0.26	0.49	0.25	-0.02	3053

Tide Cycle, NOAA Station 8723214, January 1, 2012

Vessel Call Frequency, Port Everglades, FL, 2012
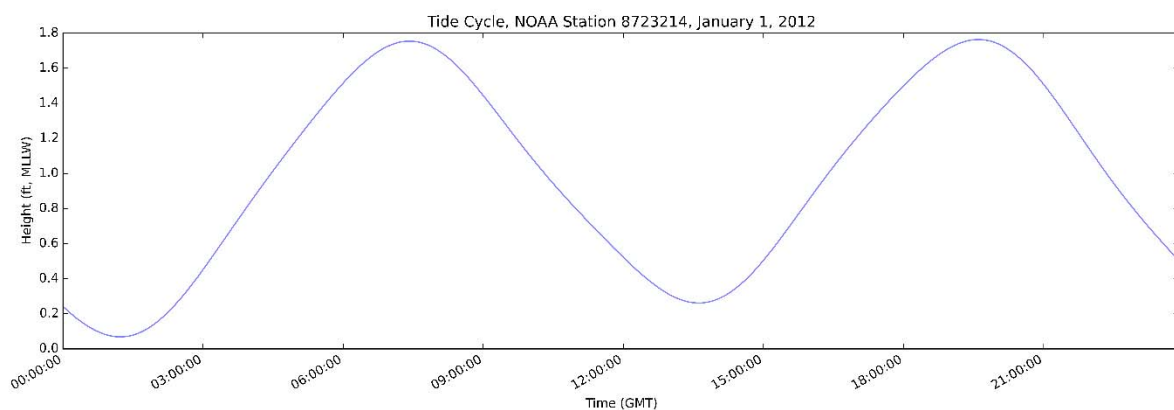
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	6	6	2	7	5	5	8	29	22	40	37	39	29	23	13	17	8	14	10	5	8	10	23
TUE	15	21	10	2	2	5	2	4	19	12	18	61	55	52	27	25	28	19	16	22	22	22	21	12
WED	16	14	4	7	7	7	6	11	14	22	24	38	31	40	39	35	28	25	29	23	27	30	29	17
THU	15	13	7	3	5	1	7	7	22	33	43	76	50	38	27	28	15	20	12	22	22	18	32	22
FRI	21	13	8	9	10	9	10	14	17	17	18	57	50	25	16	19	23	21	20	29	38	26	36	31
SAT	14	9	7	4	5	3	6	10	11	6	13	57	31	35	19	13	12	8	8	8	10	13	21	22
SUN	11	15	1	6	8	8	6	5	7	5	11	18	21	31	22	32	14	19	19	10	8	3	8	18

Hour (UTC)

Vessel Call Frequency, Port Everglades, FL, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	12	4	5	5	2	6	4	16	18	28	38	50	39	37	21	18	15	11	12	7	6	10	14	11
TUE	11	8	7	4	5	5	4	7	14	26	15	29	48	52	27	22	18	29	27	21	14	14	14	13
WED	10	6	11	6	6	5	3	5	12	24	29	63	36	56	29	17	26	21	31	40	26	23	20	20
THU	18	10	9	11	5	4	6	11	12	33	31	46	37	42	31	22	12	26	15	18	11	15	17	29
FRI	19	21	10	6	3	5	4	10	23	13	18	57	46	26	21	19	20	19	19	32	23	40	40	27
SAT	19	10	9	8	9	7	9	24	12	12	12	27	42	24	18	12	19	10	13	10	16	21	23	14
SUN	14	20	9	2	7	5	7	20	14	6	14	12	20	12	16	16	27	30	29	23	7	9	17	25

Vessel Call Frequency, Port Everglades, FL, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	11	14	12	13	6	4	8	24	16	17	14	30	39	40	29	20	14	13	12	16	12	16	17	11
TUE	7	8	9	9	6	2	7	16	18	13	22	18	21	25	27	29	15	19	24	19	28	23	16	15
WED	12	7	7	4	5	4	2	17	34	15	21	26	42	48	33	22	27	29	25	43	34	37	24	23
THU	15	6	5	12	6	5	8	11	9	13	34	32	34	23	20	23	25	28	15	22	14	13	26	14
FRI	19	20	13	9	6	6	4	13	18	14	22	43	37	49	18	15	18	19	20	33	38	34	47	22
SAT	22	20	19	15	7	6	9	12	15	8	16	37	32	32	10	9	9	17	15	19	14	13	21	26
SUN	18	7	11	10	0	7	8	21	23	10	15	27	25	18	13	9	17	12	24	11	13	12	23	21

Hour (UTC)

Port Everglades, FL Interarrival Times
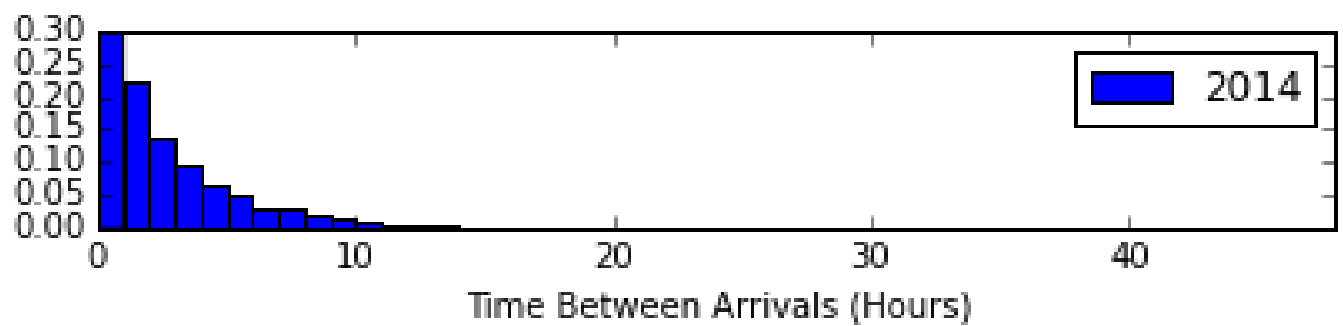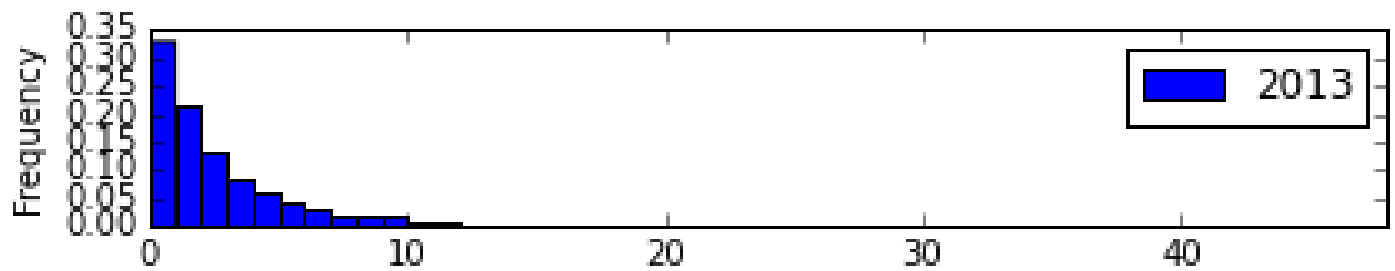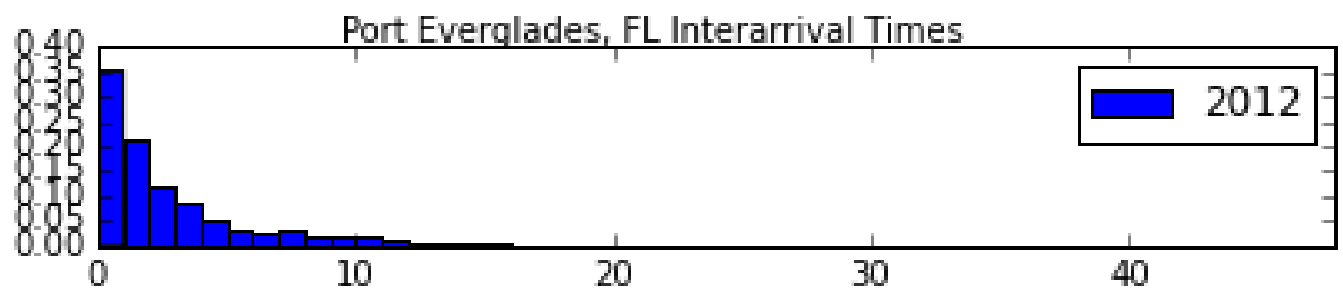
Port Everglades, FL Vessel Arrival Water Surface Elevation

Portland

0	0.375	0.75	1.5 Miles

Legend
- ★ Port of Interest
- ▲ NOAA Tide Station
- ▬ Observation Reference

Portland, ME

Portland, ME

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
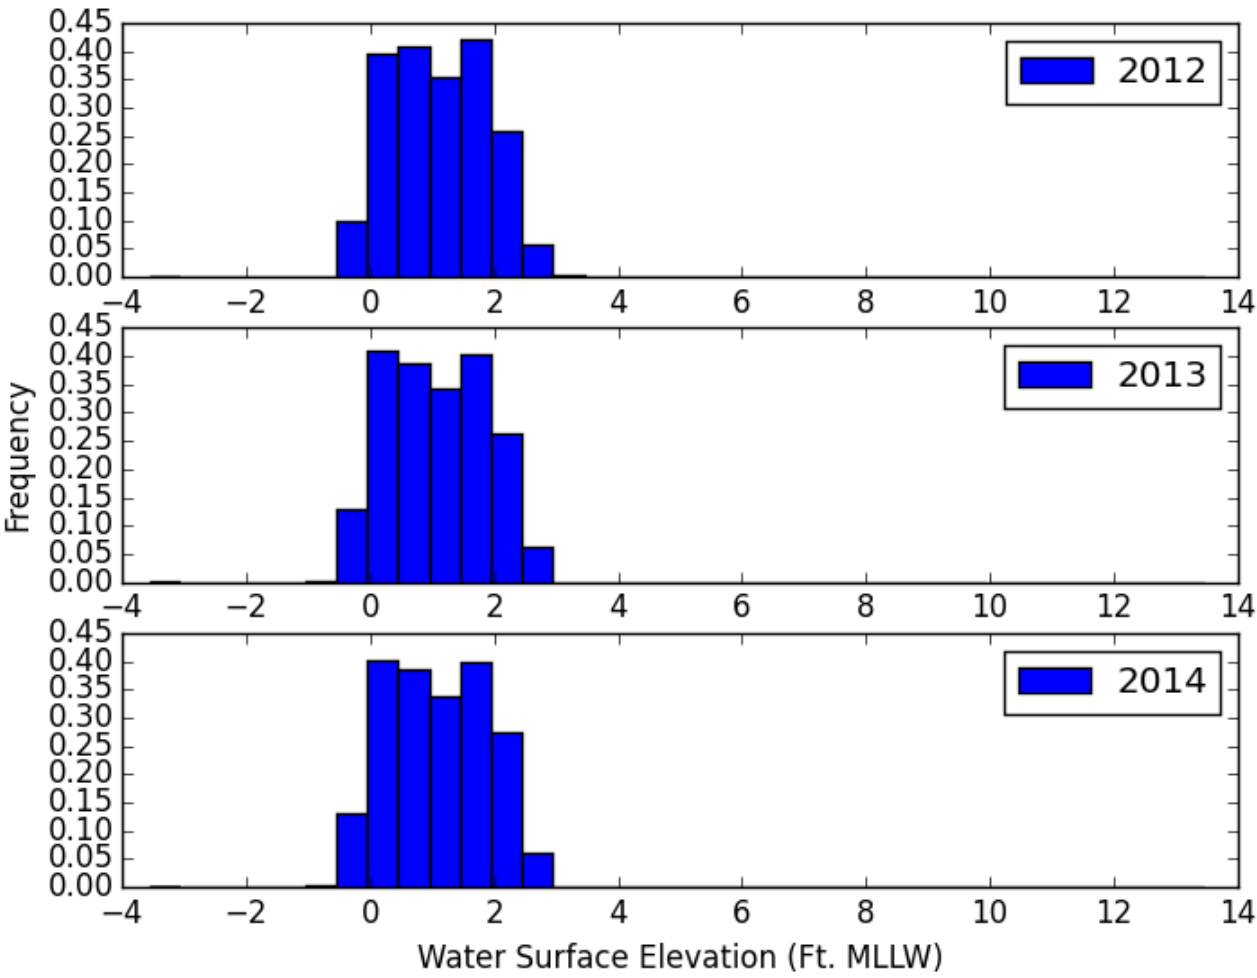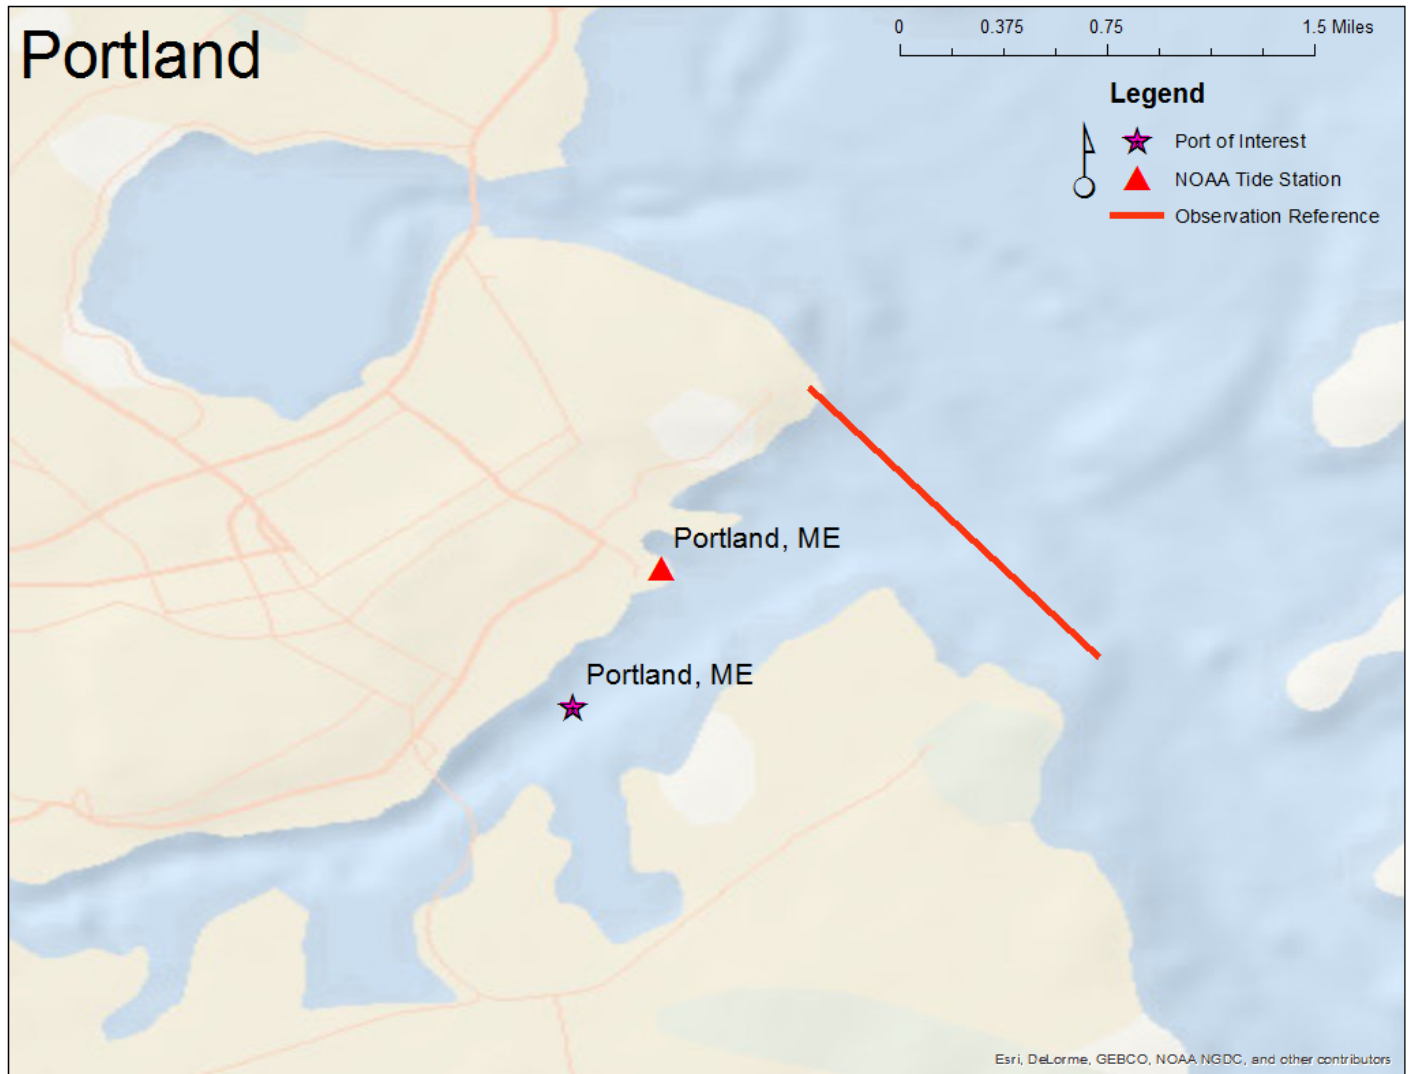
Port of Interest: Portland, ME

Tide Station Number: 8418150

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	13.89	1.80	8.06	0.11	0.50	0.39	0.55	287
2013	13.78	1.75	8.11	0.13	0.52	0.35	0.42	263
2014	13.86	1.71	8.16	0.14	0.59	0.27	0.21	258

Tide Cycle, NOAA Station 8418150, January 1, 2012

Vessel Call Frequency, Portland, ME, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	1	0	1	0	1	4	2	2	2	3	3	2	7	2	2	0	1	4	0	4	3	2	2	3
TUE	1	0	2	1	1	1	1	1	2	0	3	0	4	2	2	5	0	3	2	2	3	4	1	0
WED	2	1	0	2	2	2	1	0	1	2	3	2	1	3	4	3	0	4	0	2	4	1	0	0
THU	4	0	1	1	1	2	1	2	1	0	1	0	2	3	2	3	2	2	0	2	2	2	4	3
FRI	3	1	6	0	1	2	0	0	1	1	2	5	1	4	3	3	4	3	1	3	3	2	1	1
SAT	2	1	0	1	1	0	0	0	0	1	1	2	2	1	1	5	2	5	1	1	3	2	2	1
SUN	2	1	0	2	1	2	3	2	1	2	0	2	1	1	0	0	0	0	2	2	1	2	1	0

Hour (UTC)

Vessel Call Frequency, Portland, ME, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	0	3	0	3	3	0	0	2	2	1	2	1	1	3	2	4	2	2	0	0	1	0	3	2
TUE	3	1	0	1	0	2	0	2	0	0	2	3	3	5	4	2	1	3	0	0	1	1	0	0
WED	0	3	2	0	1	1	0	0	2	1	1	0	2	2	3	4	1	2	1	2	2	2	2	1
THU	1	0	1	5	1	0	2	1	2	1	3	4	3	5	1	1	2	0	4	3	2	2	1	1
FRI	2	1	0	0	1	2	0	0	1	1	1	2	2	2	9	3	0	1	2	1	0	0	1	2
SAT	1	0	2	0	0	1	3	0	0	1	1	0	2	2	1	2	2	4	3	1	0	2	3	0
SUN	1	2	1	3	1	1	2	0	5	1	5	4	1	3	0	3	0	2	2	1	2	2	1	3

Hour (UTC)

Vessel Call Frequency, Portland, ME, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	2	1	0	3	2	1	0	0	2	0	3	1	2	2	2	2	2	2	1	1	4	2	0	1
TUE	1	1	0	2	2	1	4	1	0	3	2	1	2	3	2	0	2	3	0	1	2	2	2	1
WED	0	1	2	1	0	0	2	2	0	3	0	5	1	3	1	4	2	1	2	0	1	1	1	2
THU	1	2	0	3	1	1	0	1	0	2	1	6	2	2	1	1	1	4	2	1	1	2	1	1
FRI	1	2	1	1	1	1	0	0	2	1	4	2	4	3	2	2	1	3	2	2	1	1	1	2
SAT	1	2	1	3	3	2	3	0	2	1	1	1	2	1	5	0	3	2	2	3	0	1	1	2
SUN	1	1	2	0	1	1	0	1	1	2	3	3	1	0	3	2	1	1	3	1	2	0	0	0

Hour (UTC)

Portland, ME Interarrival Times
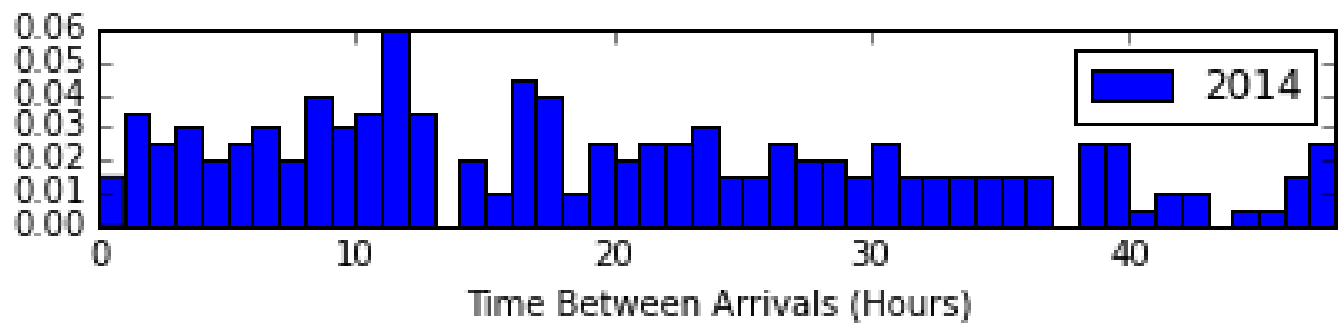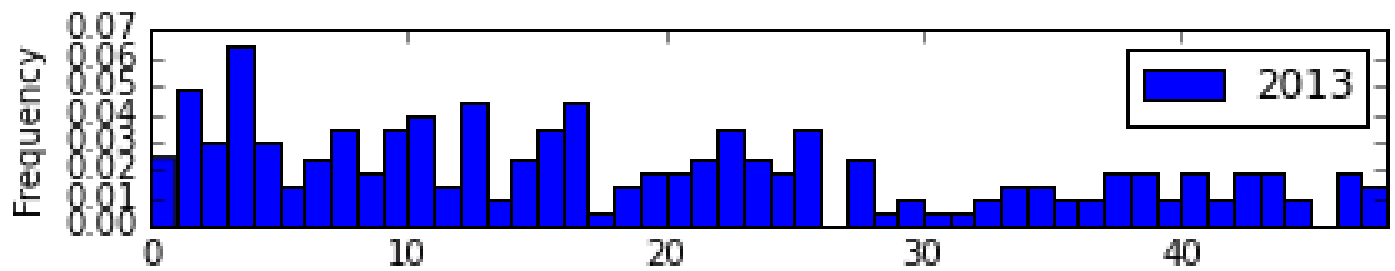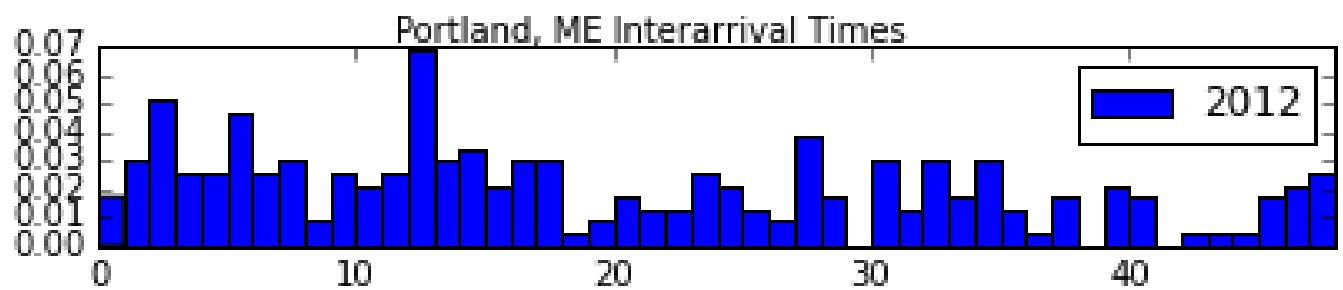
Portland, ME Vessel Arrival Water Surface Elevation
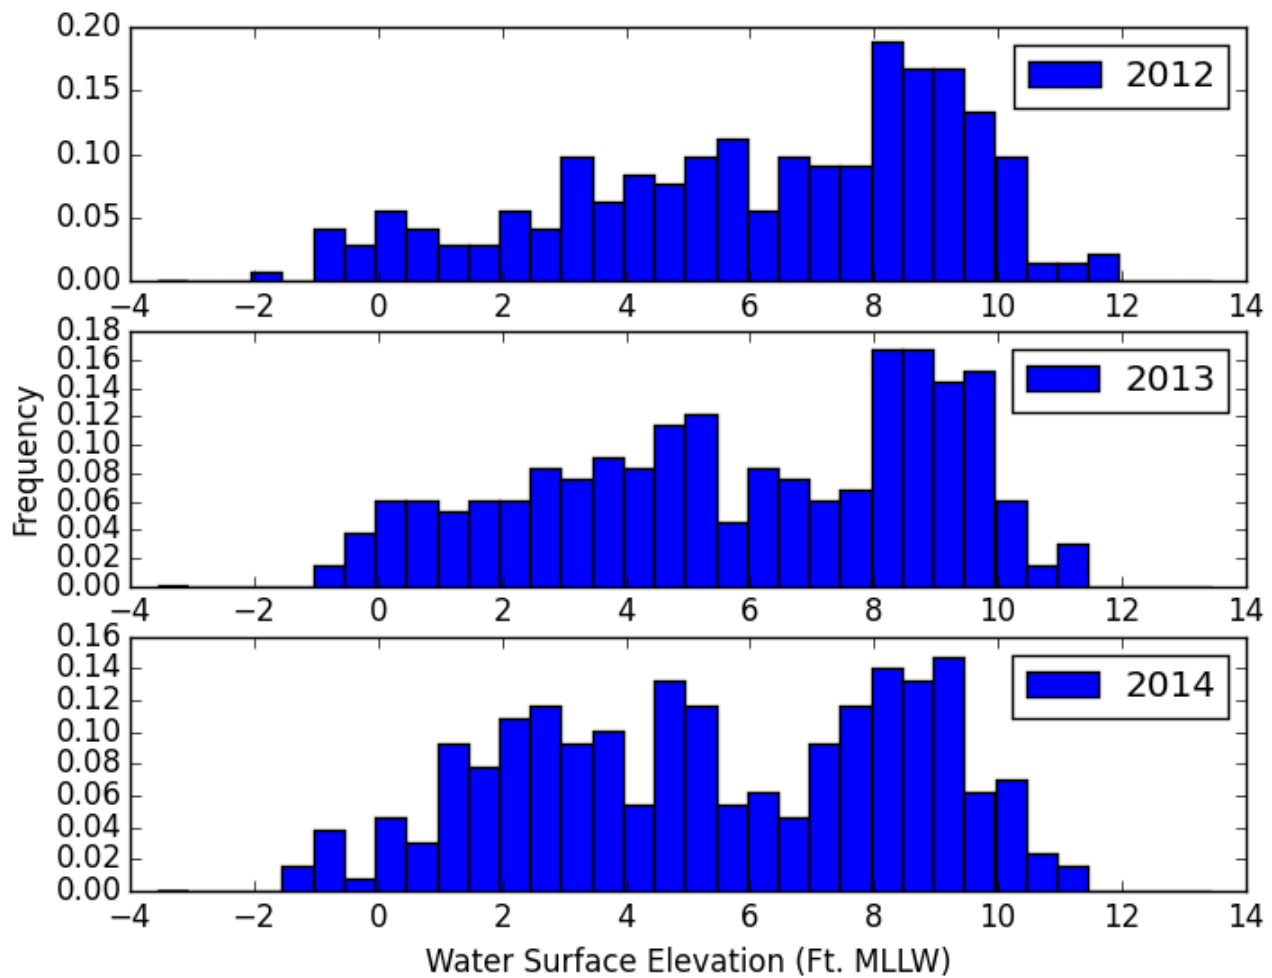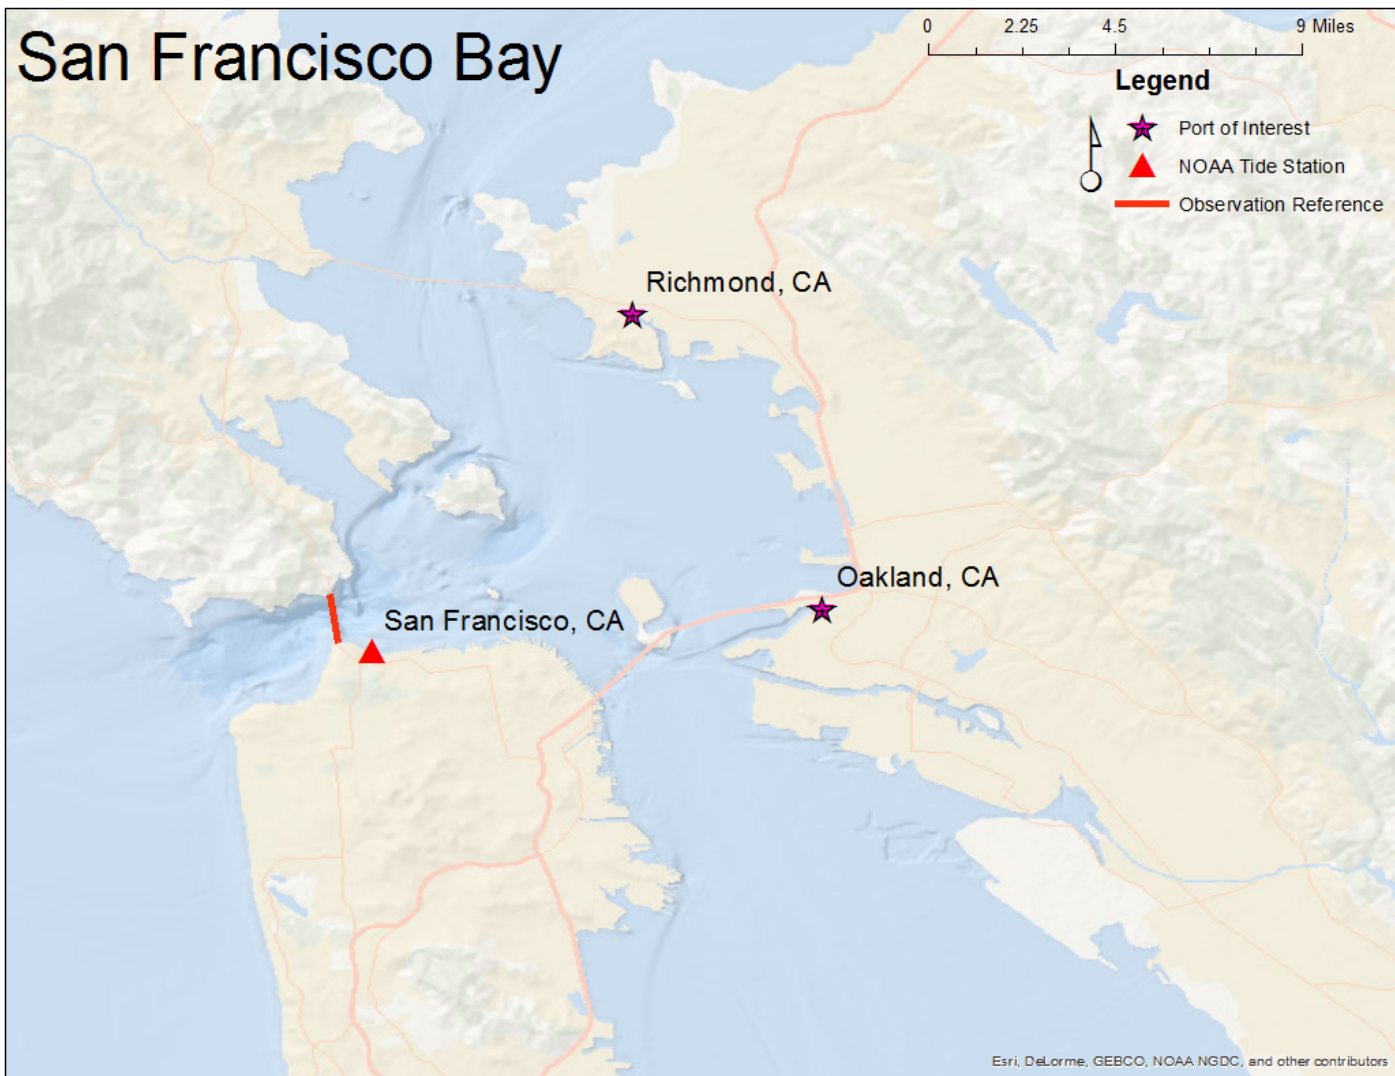
San Francisco Bay

Port of Interest: San Francisco, CA

Tide Station Number: 9414290

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	9.11	1.87	4.48	0.26	0.50	0.25	-0.02	3134
2013	8.97	1.87	4.47	0.27	0.48	0.25	-0.05	3185
2014	8.75	1.87	4.49	0.27	0.48	0.25	-0.04	3109

Tide Cycle, NOAA Station 9414290, January 1, 2012
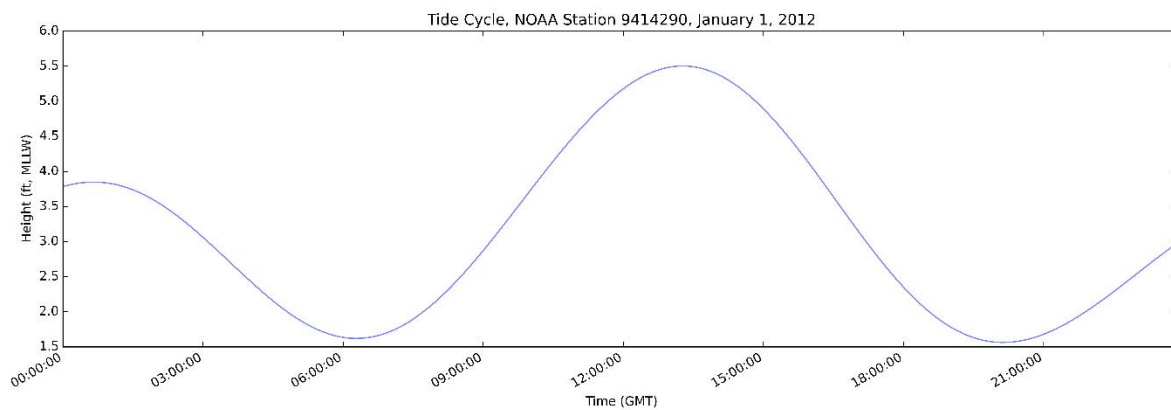
Vessel Call Frequency, San Francisco, CA, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	25	16	8	12	7	6	11	7	6	7	20	40	49	30	13	14	17	8	9	11	29	32	47	34
TUE	45	23	15	13	15	9	11	11	6	10	33	60	72	38	18	13	17	10	5	12	4	22	21	51
WED	31	16	18	6	14	10	11	14	6	9	10	53	60	39	16	19	13	6	5	16	10	22	39	32
THU	24	25	11	10	13	19	13	8	15	10	15	33	31	28	25	6	14	12	11	14	14	26	23	25
FRI	30	18	7	12	10	13	12	10	10	11	8	37	50	26	21	16	13	13	10	18	14	43	27	50
SAT	24	22	16	11	8	6	14	12	3	9	19	46	34	26	18	9	13	11	15	10	7	12	31	24
SUN	25	14	16	10	9	13	7	9	6	12	24	23	25	18	21	14	7	14	11	7	11	13	19	35

Hour (UTC)

Vessel Call Frequency, San Francisco, CA, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	26	23	18	13	12	10	4	9	10	6	11	39	41	35	8	11	13	10	10	9	12	34	52	65
TUE	44	18	13	12	6	11	6	6	5	8	32	54	61	36	17	11	15	9	10	11	15	12	22	43
WED	31	13	12	8	10	7	7	10	8	2	18	52	81	46	23	16	9	8	12	15	14	20	32	43
THU	26	23	11	6	12	12	8	14	9	15	10	52	67	34	17	12	9	11	6	9	10	23	25	30
FRI	23	12	8	9	8	16	7	11	7	10	9	47	34	24	22	8	10	12	10	10	16	24	30	42
SAT	34	15	13	8	8	8	10	8	5	5	12	43	69	35	27	15	11	11	5	10	7	18	33	30
SUN	23	25	12	15	13	15	6	8	9	10	16	28	52	43	14	18	5	11	10	15	12	23	23	24

Hour (UTC)

Vessel Call Frequency, San Francisco, CA, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	35	18	10	9	10	9	8	4	4	11	12	27	33	30	14	11	16	14	10	11	19	35	49	58
TUE	37	25	18	11	7	5	9	5	11	8	17	54	97	37	10	13	16	15	12	11	21	20	37	50
WED	25	22	12	8	12	12	5	8	13	7	8	33	49	32	9	27	11	12	10	15	15	20	47	34
THU	27	17	9	11	7	6	11	6	9	3	16	41	49	31	14	13	12	11	17	17	9	19	17	24
FRI	20	17	12	11	11	8	14	8	6	4	11	44	42	27	21	18	9	9	8	9	6	24	26	22
SAT	25	11	10	12	6	15	18	8	8	8	16	39	45	22	8	10	15	14	10	12	13	15	23	41
SUN	29	22	7	10	7	11	8	9	8	11	24	48	58	31	16	10	18	15	12	13	12	32	28	34

Hour (UTC)

San Francisco, CA Interarrival Times
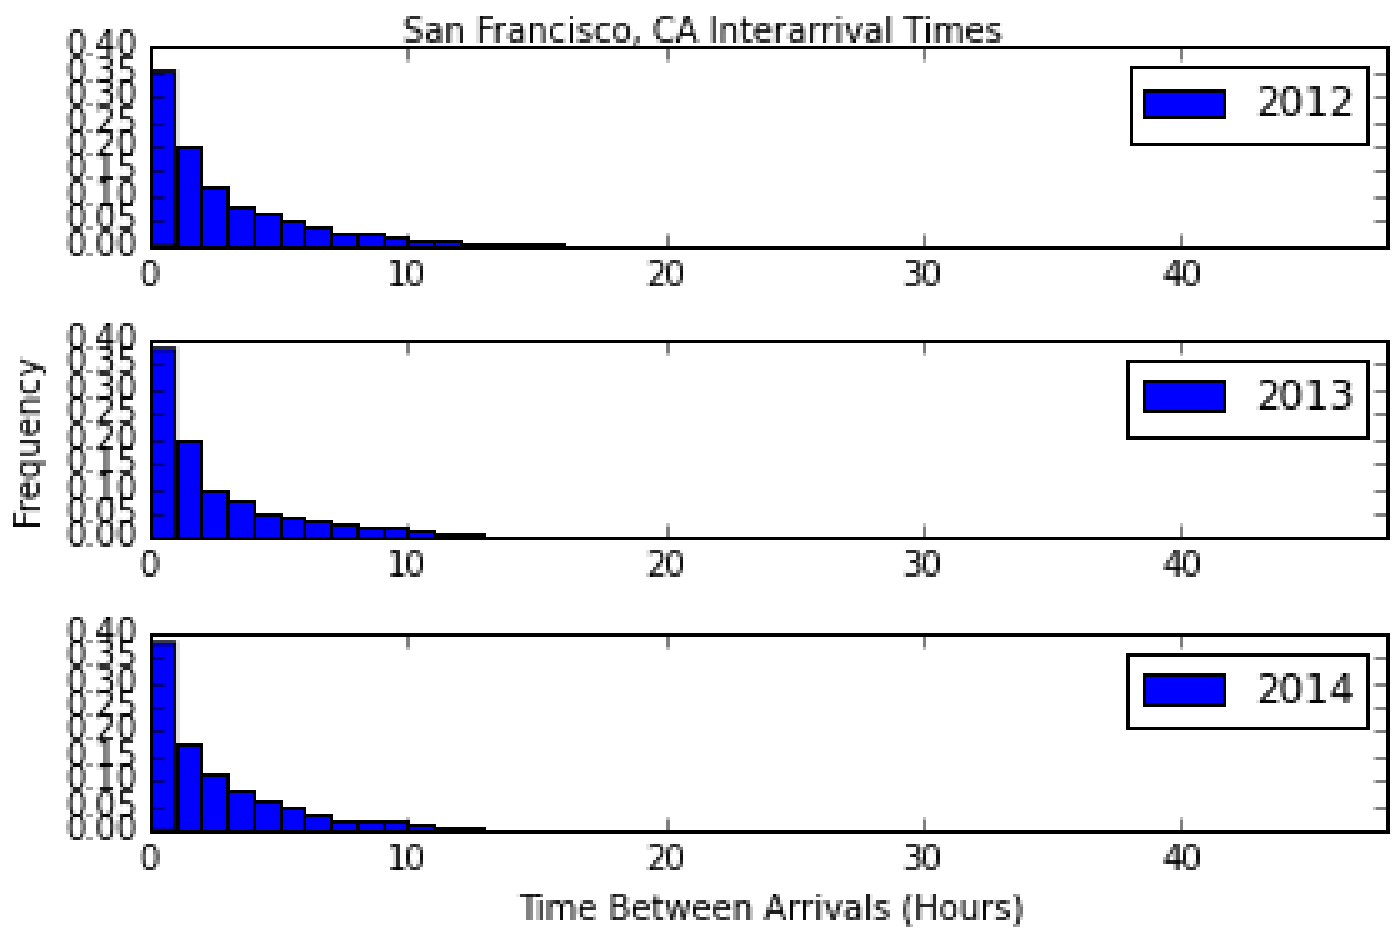
San Francisco, CA Vessel Arrival Water Surface Elevation
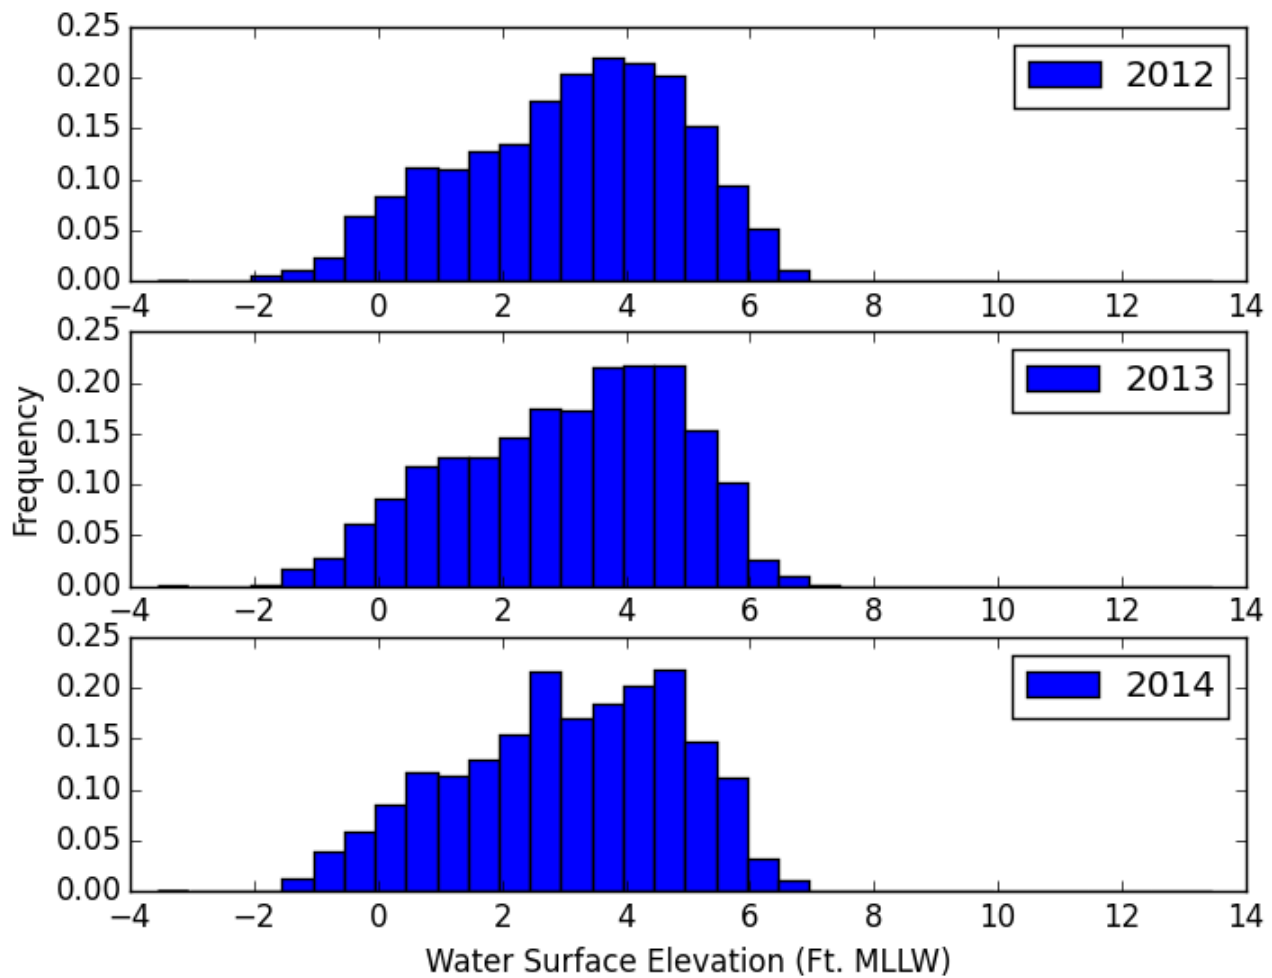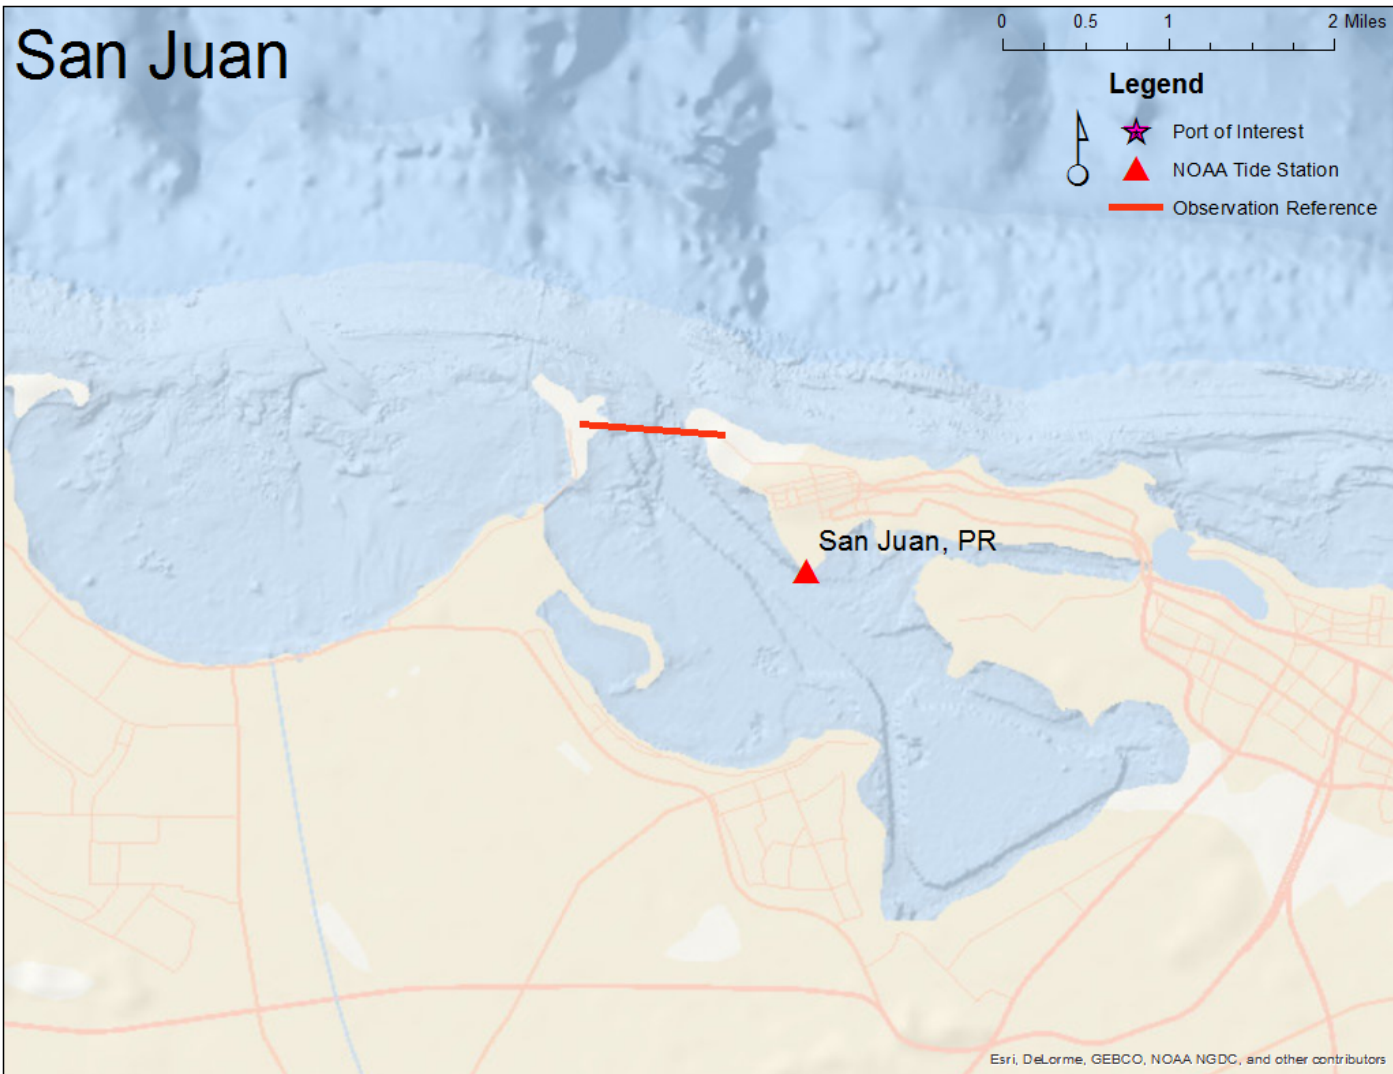
San Juan

Port of Interest:	**San Juan, PR**
Tide Station Number:	9755371

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	2.71	0.41	1.12	0.26	0.50	0.25	-0.02	1293
2013	2.62	0.41	1.12	0.26	0.50	0.24	-0.05	1141
2014	2.53	0.41	1.12	0.26	0.52	0.23	-0.05	1265

Vessel Call Frequency, San Juan, PR, 2012
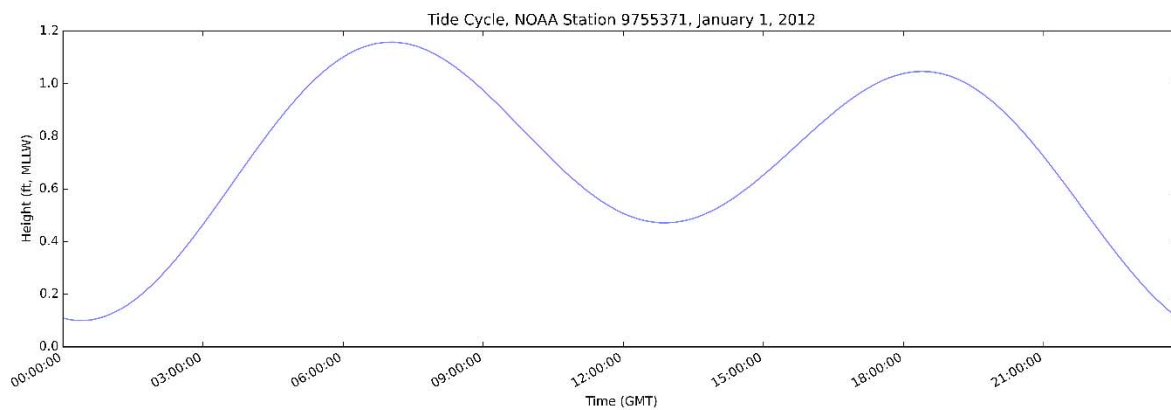
Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	4	2	0	8	10	4	5	5	24	41	64	28	52	19	15	11	3	3	2	5	7	6	2	3
TUE	5	2	2	3	6	3	1	0	6	34	25	12	8	6	10	3	2	3	4	0	3	4	4	2
WED	3	1	2	2	3	5	2	2	9	8	20	25	22	6	7	2	3	10	7	1	2	3	7	3
THU	1	4	6	10	2	4	1	0	14	33	2	10	10	7	10	7	3	7	6	1	4	6	2	4
FRI	6	5	9	9	7	4	3	4	12	50	56	17	23	18	12	12	9	5	4	5	8	7	2	1
SAT	9	2	4	7	4	3	1	0	6	12	12	8	7	1	4	4	8	6	8	4	3	3	2	1
SUN	3	1	4	2	3	2	0	3	1	2	15	9	9	6	6	9	5	3	2	3	2	9	3	4

Vessel Call Frequency, San Juan, PR, 2013

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	2	4	0	5	3	3	2	4	18	68	62	17	22	22	9	10	5	9	4	3	3	3	2	2
TUE	7	2	1	5	3	2	0	0	4	23	8	5	5	3	3	7	1	2	0	4	6	4	1	5
WED	1	3	1	2	2	1	1	0	3	10	5	10	22	5	19	12	7	6	5	1	4	5	5	2
THU	5	4	12	15	8	2	0	0	12	19	14	7	6	7	2	6	3	5	4	3	4	3	2	5
FRI	4	5	2	4	2	5	1	2	17	58	28	20	22	20	16	9	6	8	2	3	5	8	0	5
SAT	5	1	3	1	2	0	0	0	0	11	7	6	4	4	5	7	3	6	3	2	3	6	7	3
SUN	0	7	2	4	2	1	1	0	0	4	15	6	12	2	4	29	2	6	5	5	8	9	8	5

Vessel Call Frequency, San Juan, PR, 2014

Hour (UTC)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	4	2	1	1	2	1	1	0	4	50	73	19	25	16	5	9	7	11	8	6	5	9	0	4
TUE	4	1	2	1	5	2	3	1	17	36	8	6	7	4	5	6	4	2	0	1	3	1	1	4
WED	3	3	4	0	2	1	1	2	2	5	3	4	17	8	4	3	9	9	4	4	7	24	4	6
THU	3	6	9	11	6	5	0	1	4	6	19	7	13	11	10	9	12	9	4	6	3	9	7	10
FRI	5	18	11	12	5	0	1	0	22	55	29	16	21	15	8	8	10	6	9	5	6	11	4	4
SAT	13	6	7	10	5	8	4	4	1	6	8	3	7	4	7	12	8	5	6	4	7	6	6	1
SUN	0	5	18	9	5	2	1	0	0	4	14	8	2	2	1	9	8	7	4	11	15	3	8	4

San Juan,PR Interarrival Times

Frequency

Time Between Arrivals (Hours)
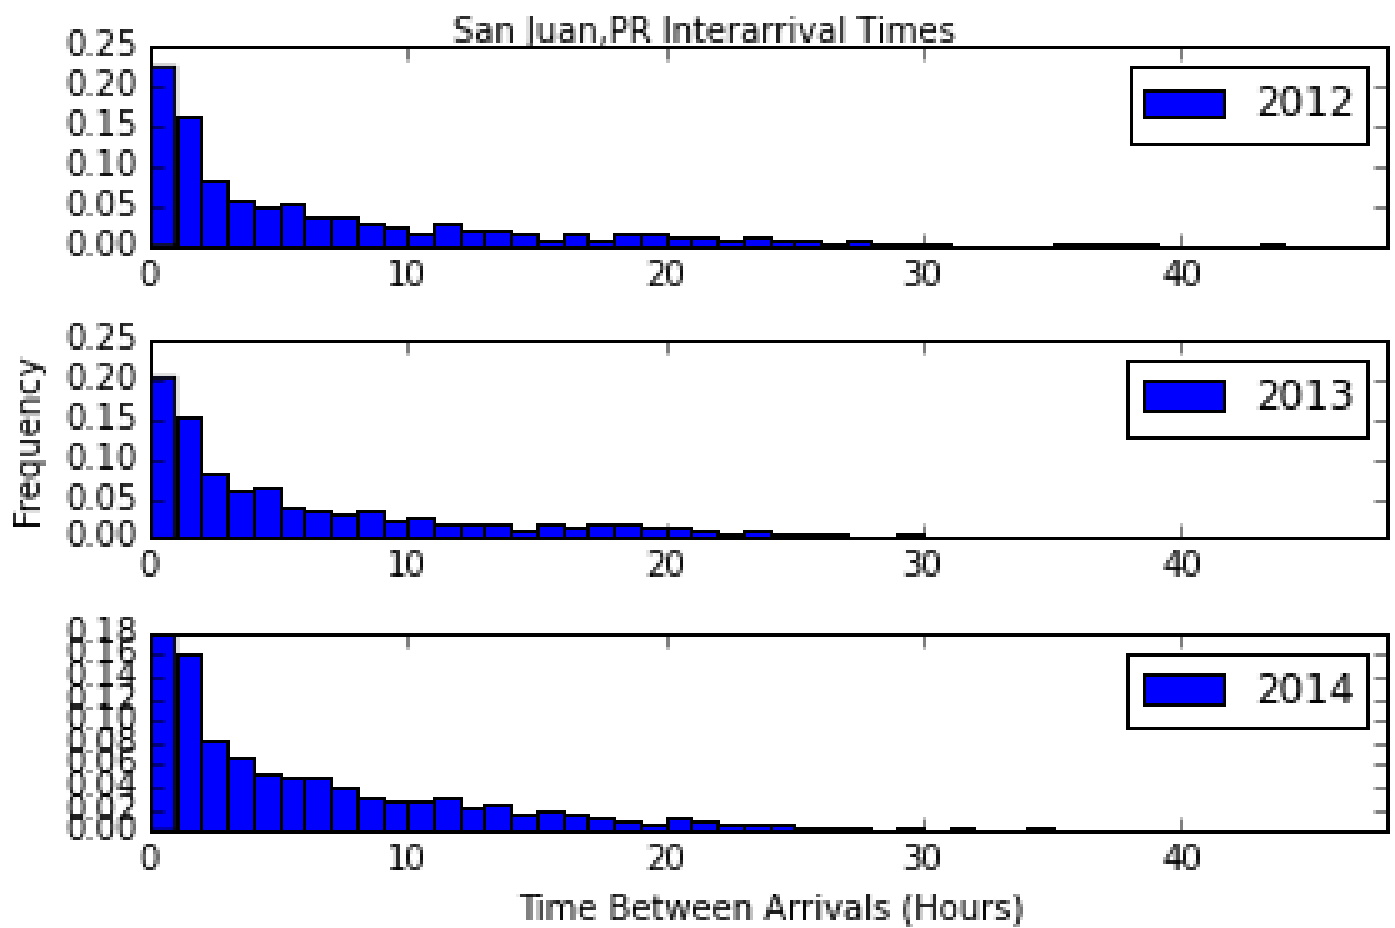
San Juan, PR Vessel Arrival Water Surface Elevation

Savannah

Legend
- ⬠ Port of Interest
- ▲ NOAA Tide Station
- ▬ Observation Reference

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors
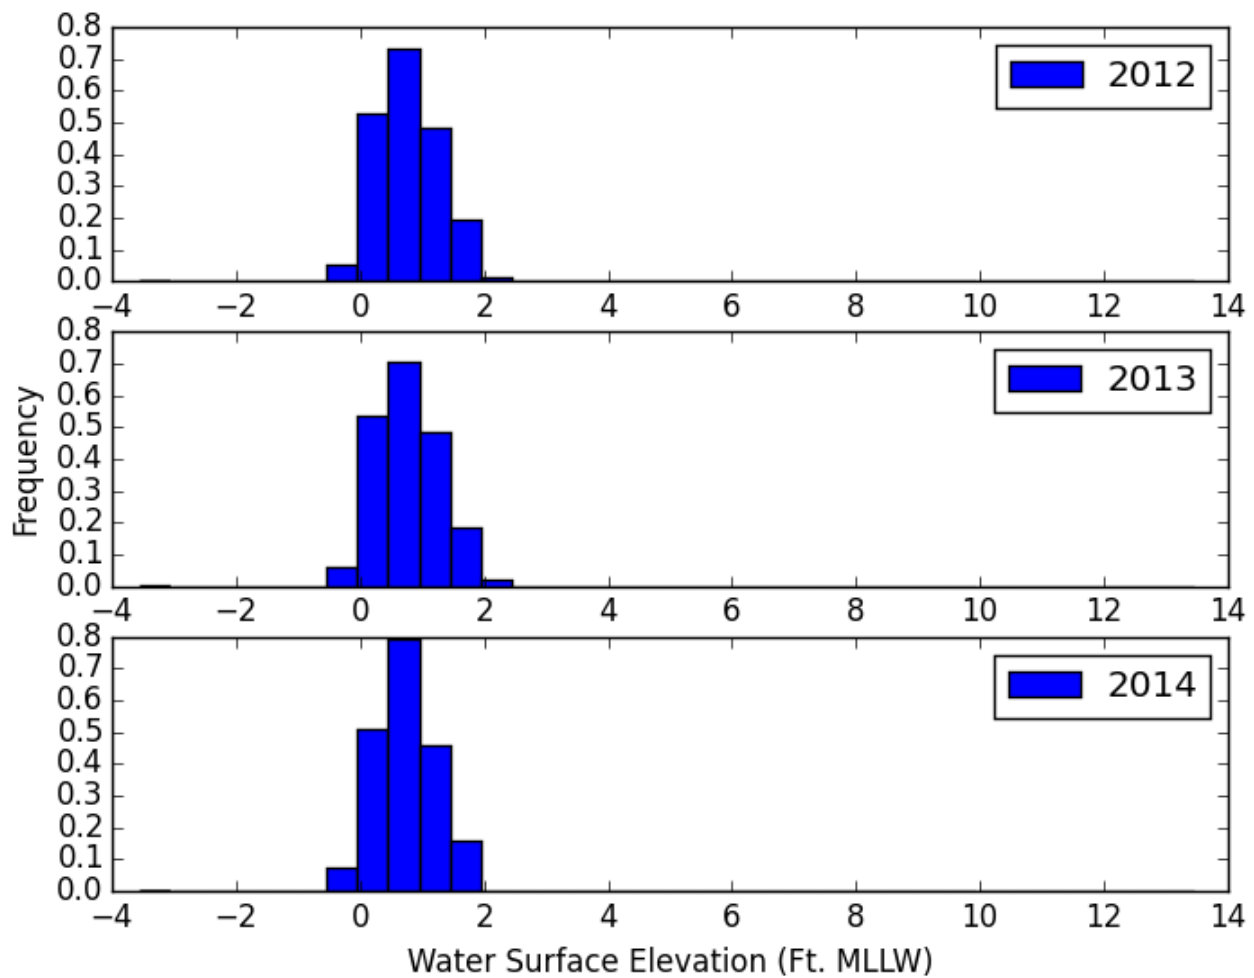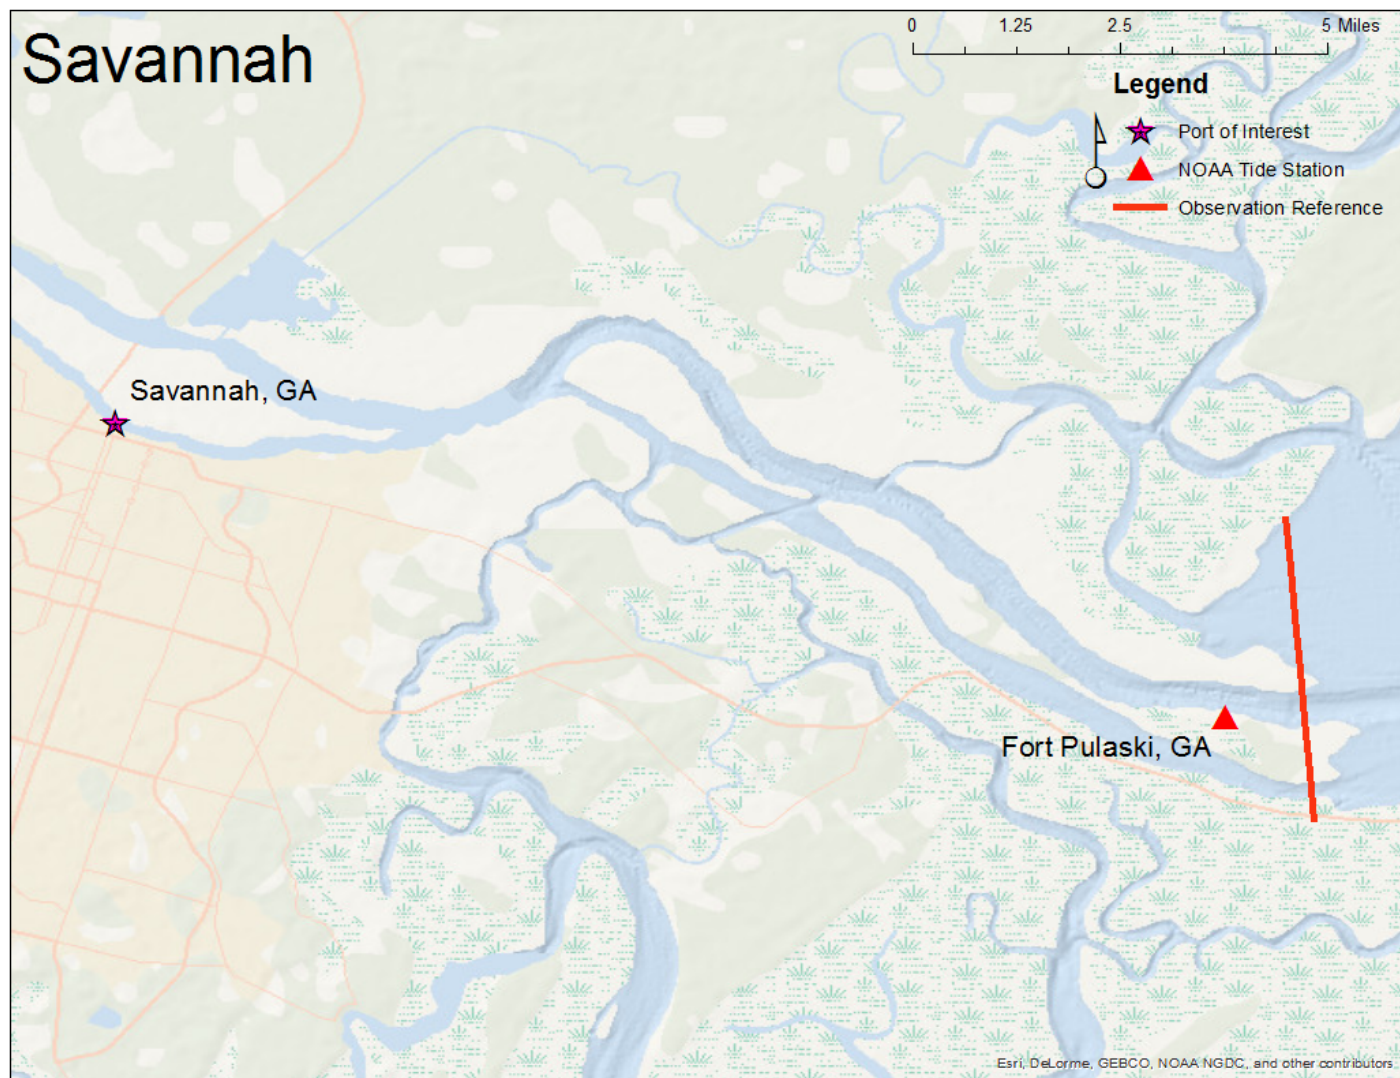
Port of Interest:	Savannah, GA
Tide Station Number:	8670870

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	10.40	1.51	6.09	0.24	0.52	0.24	0.00	2802
2013	10.29	1.50	6.13	0.23	0.50	0.27	0.07	2253
2014	10.75	1.48	6.15	0.22	0.51	0.27	0.11	2358

Tide Cycle, NOAA Station 8670870, January 1, 2012
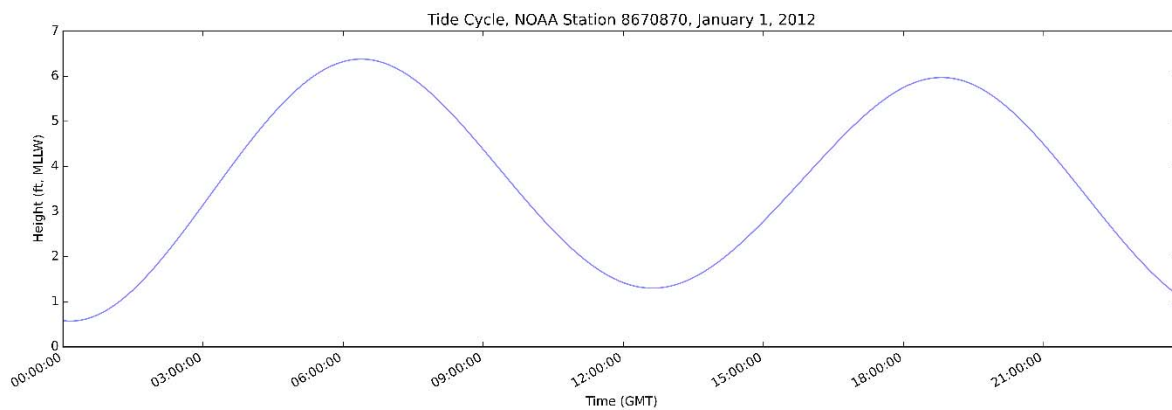
Vessel Call Frequency, Savannah, GA, 2012

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	6	5	4	9	10	16	34	25	24	11	10	16	12	15	6	10	6	23	35	26	16	11	13
TUE	14	4	6	7	9	18	24	41	37	24	13	14	17	30	19	15	19	11	15	28	20	22	14	13
WED	8	6	6	8	11	6	17	58	55	29	23	13	14	21	11	17	14	10	14	20	21	17	11	14
THU	10	11	1	6	12	8	19	41	42	31	26	16	24	24	14	13	11	15	25	52	25	18	12	8
FRI	10	10	5	5	8	14	18	38	52	21	12	17	22	26	14	15	9	12	15	39	26	8	11	5
SAT	12	7	7	4	8	11	29	37	35	32	16	15	19	31	26	18	12	15	31	22	24	15	14	14
SUN	4	4	5	5	7	8	16	24	23	15	7	10	9	15	12	7	5	11	12	19	13	14	12	6

Hour (UTC)

Vessel Call Frequency, Savannah, GA, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	5	4	4	3	2	25	32	39	18	19	10	18	24	18	11	6	11	9	17	14	14	6	5
TUE	8	4	4	4	5	3	26	34	36	21	9	8	13	29	13	9	4	8	7	22	22	13	6	5
WED	8	8	7	4	2	9	26	31	47	20	18	8	15	16	7	11	4	7	14	31	15	8	6	4
THU	6	3	6	4	1	8	15	38	57	17	15	15	30	33	20	12	9	9	10	20	15	11	3	10
FRI	11	5	9	2	10	11	17	27	44	22	19	11	24	22	13	18	9	10	17	19	15	8	6	3
SAT	6	8	6	4	6	4	16	35	34	15	12	7	16	17	20	20	9	13	16	21	18	18	8	6
SUN	3	15	5	5	10	5	15	18	21	14	7	11	19	14	11	6	5	5	6	12	11	7	9	4

Hour (UTC)

Vessel Call Frequency, Savannah, GA, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	6	5	3	9	11	13	29	32	12	7	11	30	24	9	18	4	11	18	22	20	11	7	9
TUE	10	12	7	5	5	6	10	33	24	15	12	14	18	26	20	12	9	7	12	19	16	15	5	6
WED	15	5	11	7	7	4	25	35	34	31	11	7	11	23	16	11	5	9	9	17	17	17	13	12
THU	8	7	9	9	4	11	21	51	40	22	11	11	17	33	24	9	4	12	10	23	18	6	8	9
FRI	4	9	7	7	9	14	28	58	61	24	10	13	14	28	18	11	3	7	13	19	11	15	4	12
SAT	3	7	6	3	3	7	22	41	30	22	5	13	14	18	22	11	4	7	18	13	12	8	6	9
SUN	10	6	2	12	8	4	19	20	23	14	8	10	15	19	8	8	4	7	17	21	20	7	14	6

Hour (UTC)

Savannah, GA Interarrival Times
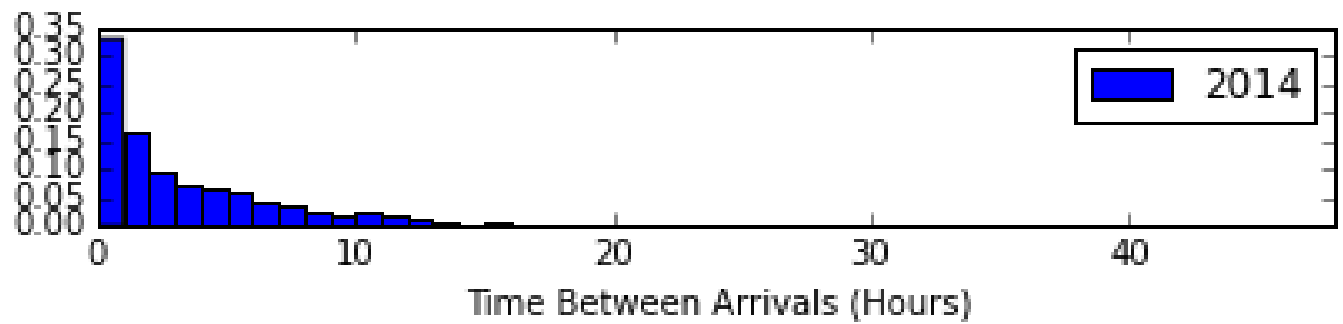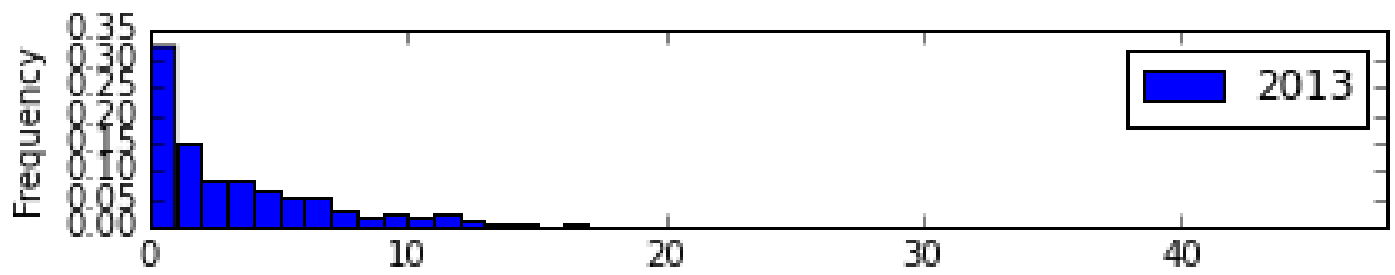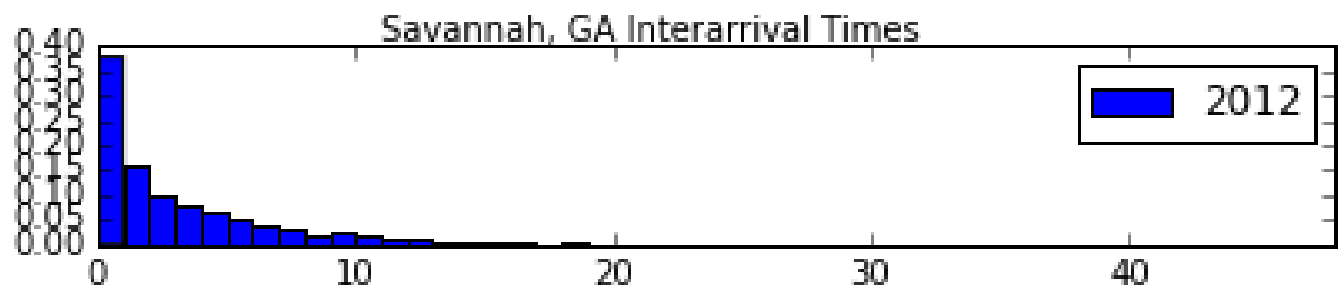
Savannah, GA Vessel Arrival Water Surface Elevation

Seattle & Tacoma

Seattle, Puget Sound, WA, WA

Seattle, WA

Tacoma, WA

Esri, DeLorme, GEBCO, NOAA NGDC, and other contributors

Legend
- ★ Port of Interest
- ▲ NOAA Tide Station
- — Observation Reference
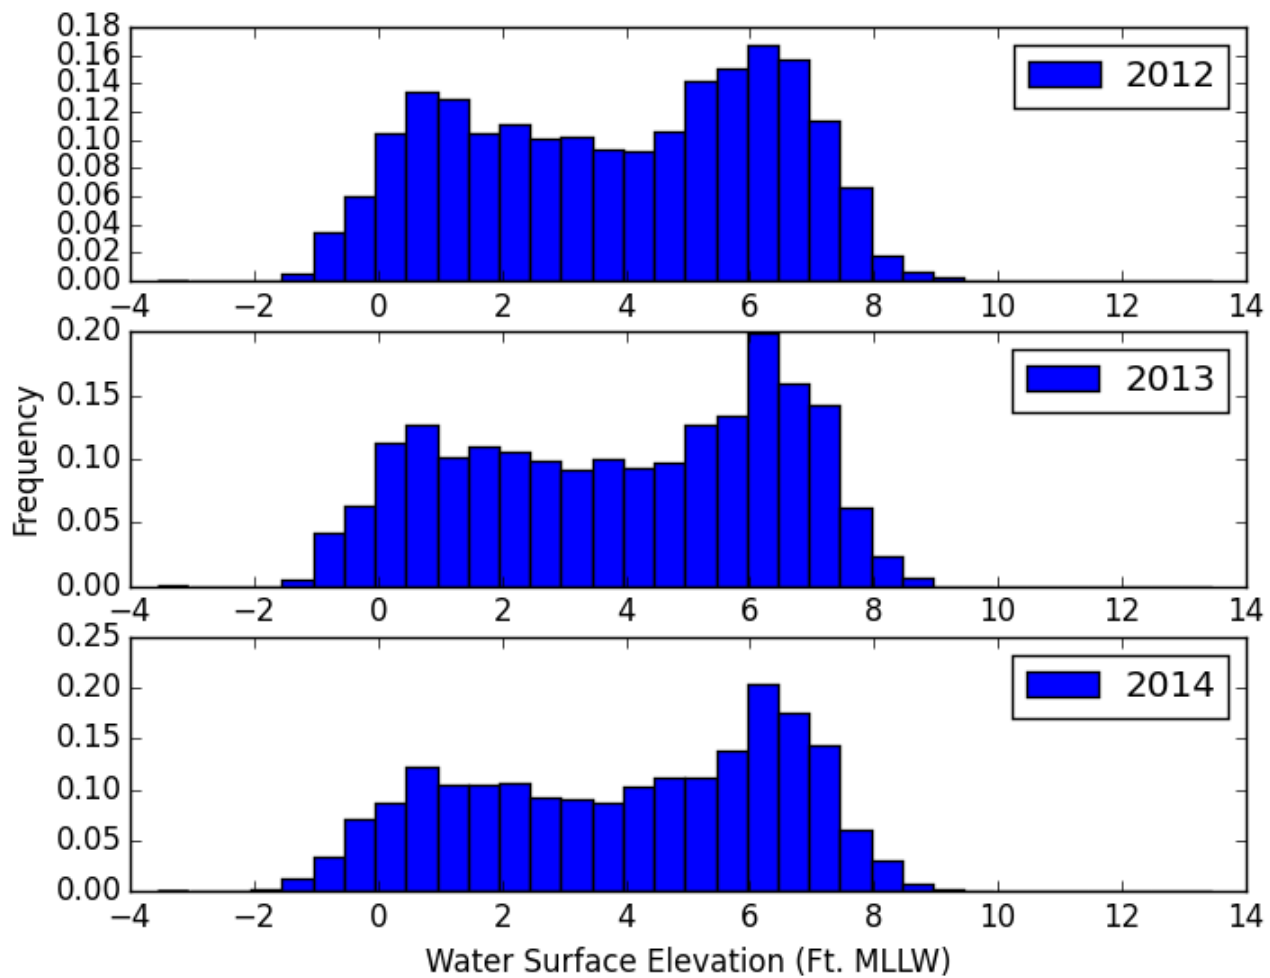
Port of Interest: Seattle & Tacoma, WA
Tide Station Number: 9447130

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	16.80	4.27	9.37	0.25	0.49	0.26	0.00	1937
2013	16.76	4.31	9.36	0.26	0.50	0.25	-0.03	1787
2014	16.58	4.33	9.36	0.26	0.50	0.24	-0.03	1738

Tide Cycle, NOAA Station 9447130, January 1, 2012

Vessel Call Frequency, Seattle & Tacoma, WA, 2012
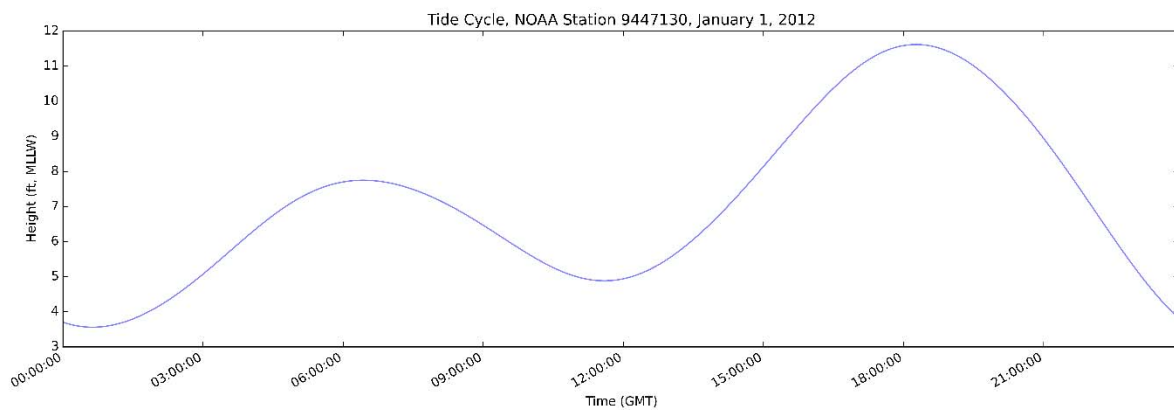
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	13	6	11	8	10	6	9	21	11	15	21	13	14	9	8	3	8	9	12	19	25	31	35	18
TUE	14	7	7	9	3	11	10	13	13	26	18	21	14	11	6	4	7	10	8	7	11	6	10	20
WED	10	4	4	7	7	1	10	15	4	12	14	23	13	12	5	13	5	2	6	14	35	17	31	21
THU	9	2	5	4	2	5	8	23	14	18	12	11	9	8	12	5	6	7	6	6	9	20	23	18
FRI	7	9	8	7	5	17	17	22	14	20	15	11	10	14	14	5	4	6	10	28	24	15	13	10
SAT	9	4	3	5	2	14	21	23	11	11	10	8	9	9	10	10	10	2	4	6	5	13	16	3
SUN	7	5	4	13	9	13	6	13	5	12	24	17	14	7	6	5	4	6	9	14	27	26	22	18

Hour (UTC)

Vessel Call Frequency, Seattle & Tacoma, WA, 2013

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	11	3	1	6	5	4	4	5	6	12	25	28	23	6	5	3	1	5	0	32	16	14	32	24
TUE	6	0	3	5	5	6	3	7	16	21	23	9	9	7	4	10	5	5	7	12	15	17	14	8
WED	4	3	7	5	4	8	6	16	10	17	22	39	16	16	8	4	6	3	10	16	31	27	21	25
THU	13	13	6	1	2	4	5	12	13	12	12	21	20	12	2	5	4	3	0	3	2	24	27	5
FRI	11	6	5	6	19	8	17	16	15	17	17	18	22	14	2	1	5	5	10	14	30	18	14	5
SAT	2	5	2	2	3	4	16	27	12	10	11	12	13	10	7	3	8	5	8	2	7	12	6	8
SUN	4	4	1	7	5	10	7	10	13	12	18	10	13	5	3	4	5	10	4	14	42	31	20	12

Hour (UTC)

Vessel Call Frequency, Seattle & Tacoma, WA, 2014

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	2	5	4	2	4	4	4	7	9	13	21	24	6	4	3	3	2	2	6	7	23	14	19	16
TUE	3	4	0	3	3	4	4	6	10	15	19	18	8	6	7	3	6	4	9	24	20	13	10	12
WED	9	3	5	3	5	4	9	20	20	19	37	31	18	9	2	10	9	1	15	21	34	23	16	13
THU	9	3	6	4	10	6	5	15	13	17	27	13	12	3	6	6	6	6	8	9	9	10	13	12
FRI	9	10	11	10	14	8	6	15	12	22	16	18	30	8	6	3	5	6	5	21	25	19	21	20
SAT	6	7	6	5	10	13	10	12	21	14	19	14	13	7	6	5	4	7	4	5	12	8	16	10
SUN	5	3	2	5	12	2	5	6	9	17	20	12	13	2	1	4	11	3	6	16	24	12	8	7

Hour (UTC)

Seattle & Tacoma, WA Interarrival Times
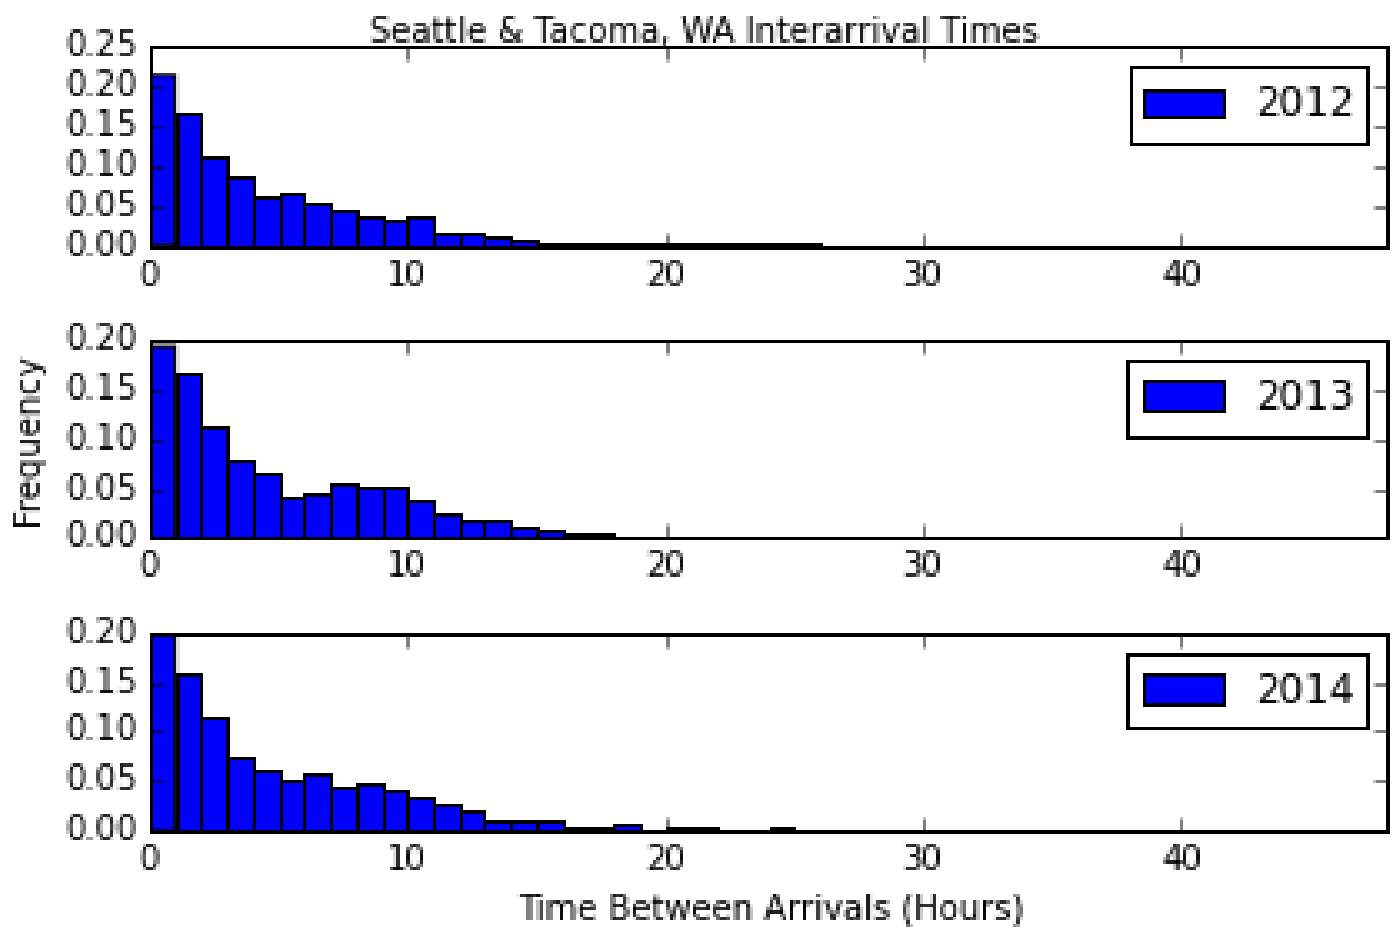
Seattle & Tacoma, WA Vessel Arrival Water Surface Elevation
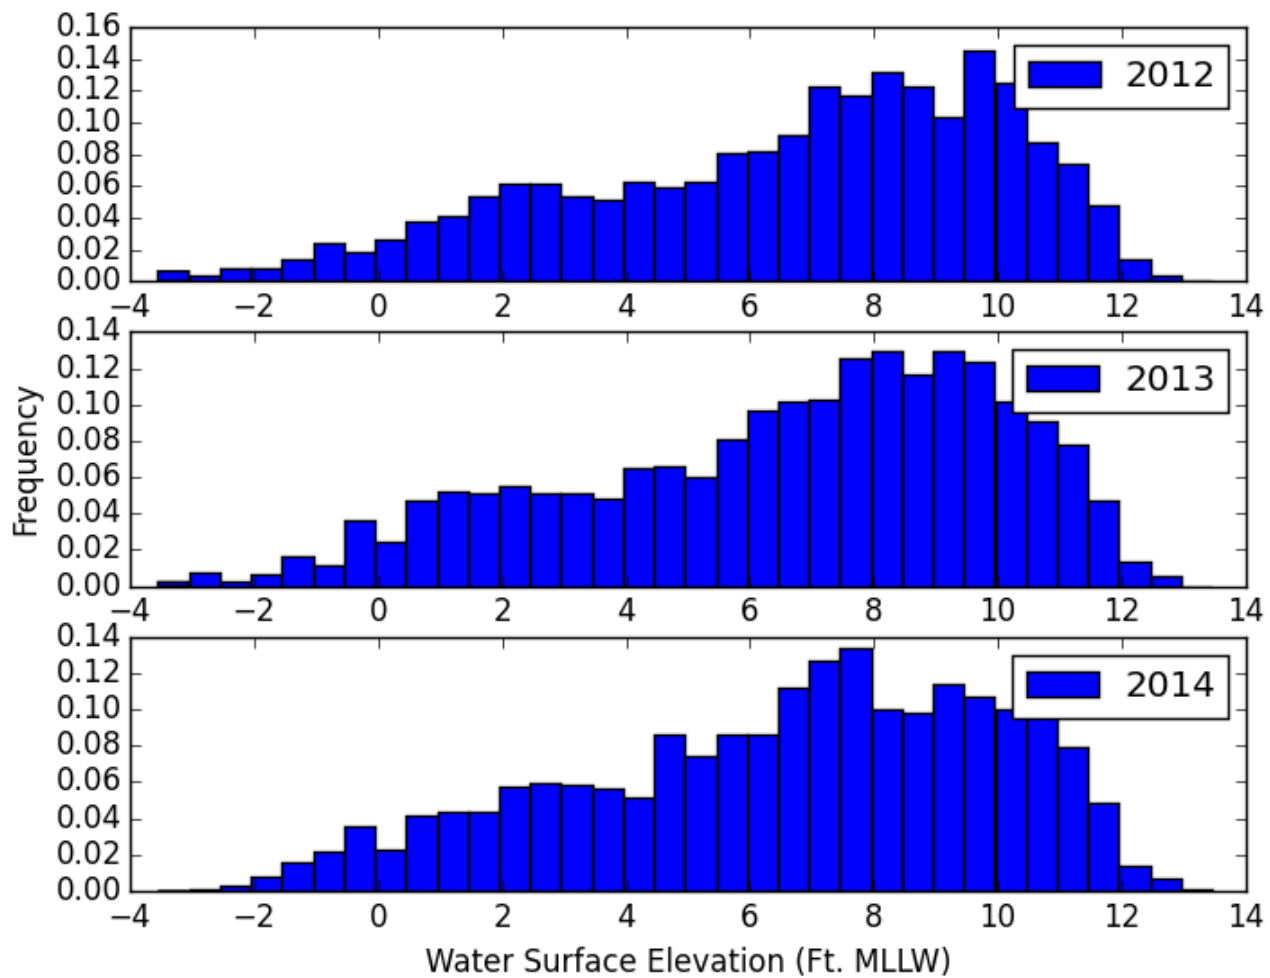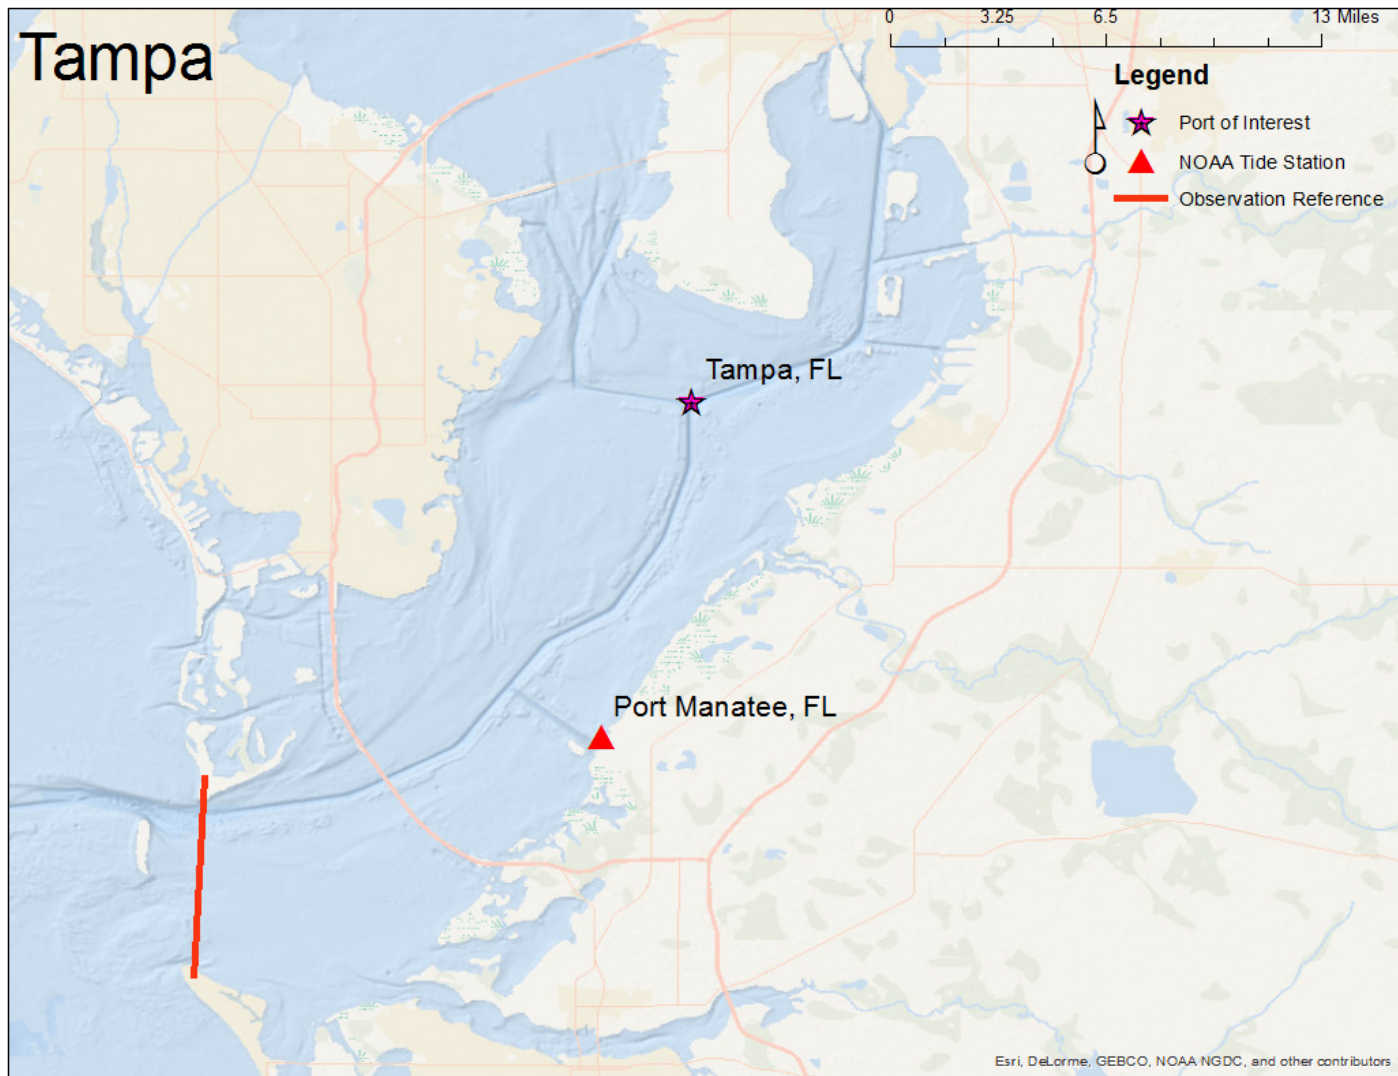
Tampa

Port of Interest:	Tampa, FL
Tide Station Number:	8726384

Year	Tide Range (Ft.)	Z_{25} (Ft.)	Z_{75} (Ft.)	T_{25}	T_{50}	T_{75}	TD	Arrivals
2012	3.74	0.70	1.65	0.27	0.49	0.24	-0.05	726
2013	3.78	0.71	1.64	0.25	0.52	0.23	-0.04	1150
2014	3.74	0.72	1.63	0.25	0.51	0.24	-0.02	1146

Vessel Call Frequency, Tampa, FL, 2012
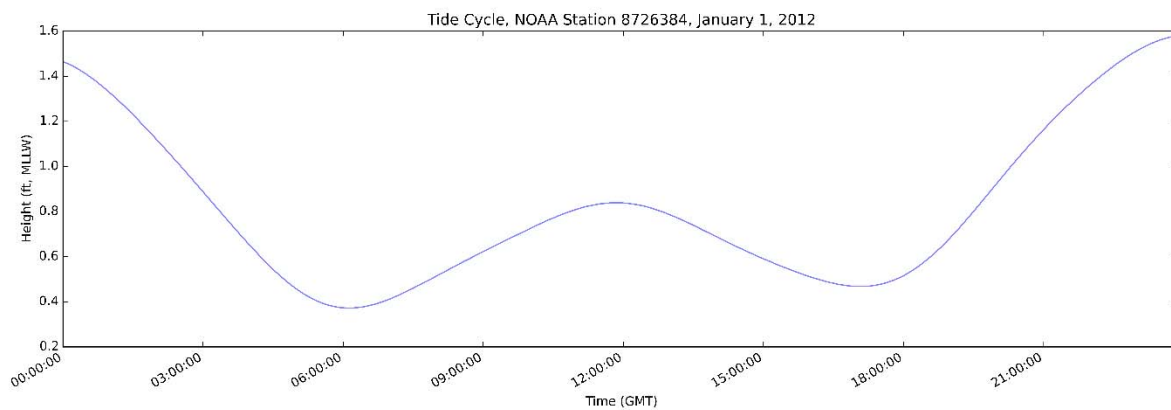
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	8	5	4	7	6	5	14	9	7	15	6	9	10	5	4	3	8	4	3	2	2	1	6	4
TUE	4	3	3	2	3	4	6	9	8	3	3	5	9	4	3	3	5	5	2	6	2	1	7	2
WED	4	1	2	1	7	3	6	5	9	3	4	7	6	3	6	3	4	4	2	4	2	3	1	2
THU	2	4	4	2	2	4	8	2	4	8	5	5	4	1	5	4	11	6	8	2	1	1	2	3
FRI	5	2	4	4	1	2	4	1	1	2	3	8	5	8	4	5	4	4	3	1	5	2	1	1
SAT	3	2	1	3	1	1	5	4	3	6	3	7	6	4	7	1	4	5	2	4	3	0	1	3
SUN	1	2	6	1	6	24	13	8	1	5	6	9	6	4	6	5	2	5	2	6	0	1	4	5

Hour (UTC)

Vessel Call Frequency, Tampa, FL, 2013

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	11	5	12	10	9	9	11	11	14	6	11	6	8	10	11	9	13	2	4	7	5	2	11	12
TUE	10	4	5	4	6	7	12	6	8	6	6	6	6	7	7	8	11	10	4	4	3	6	4	8
WED	9	6	3	2	3	5	5	3	4	8	3	9	10	10	9	10	5	5	6	3	6	5	4	5
THU	7	9	7	1	6	3	2	4	2	12	10	6	10	12	12	1	4	4	4	2	3	1	7	7
FRI	6	5	3	7	1	6	12	8	4	5	7	12	12	9	6	6	5	9	7	10	7	2	4	9
SAT	9	6	7	3	3	11	12	9	12	10	9	14	10	7	11	4	4	4	13	8	7	5	9	6
SUN	8	3	8	1	3	4	5	11	4	7	7	4	13	6	5	9	10	7	4	7	10	5	2	11

Hour (UTC)

Vessel Call Frequency, Tampa, FL, 2014

Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
MON	5	3	5	5	3	5	8	13	10	11	5	8	12	11	13	10	10	6	9	13	8	4	4	13
TUE	7	4	2	4	5	4	4	10	5	7	2	8	5	19	8	7	6	13	6	9	7	3	3	5
WED	1	3	9	3	5	6	5	12	13	3	8	8	9	6	2	4	8	5	5	5	6	3	5	2
THU	4	9	2	4	2	6	7	9	3	10	7	9	9	4	8	8	6	4	5	4	2	2	4	5
FRI	7	5	5	3	3	7	8	14	6	8	7	11	12	10	6	6	7	11	6	12	6	6	7	7
SAT	6	2	3	10	0	5	15	10	6	9	4	9	11	16	8	7	5	3	4	9	6	0	6	11
SUN	7	10	7	4	7	9	5	4	4	6	7	7	8	13	11	7	10	16	2	9	5	5	8	14

Hour (UTC)

Tampa, FL Interarrival Times
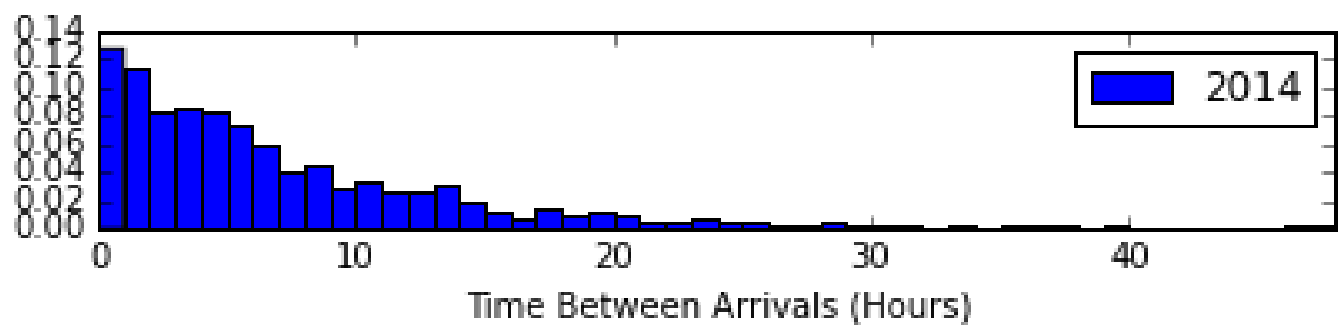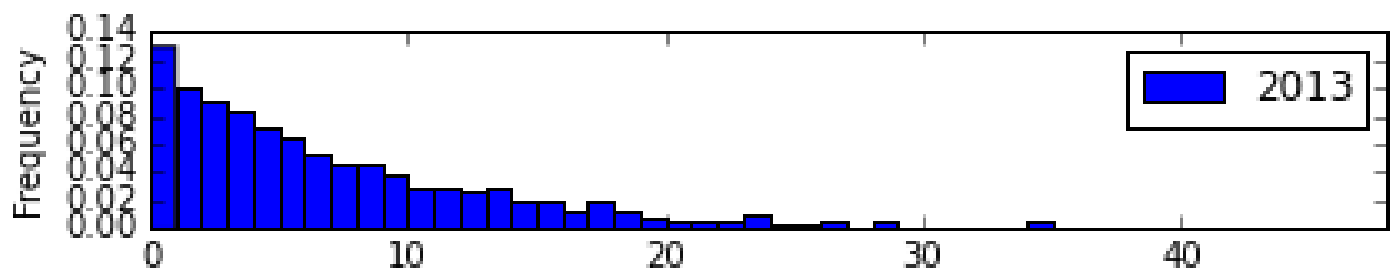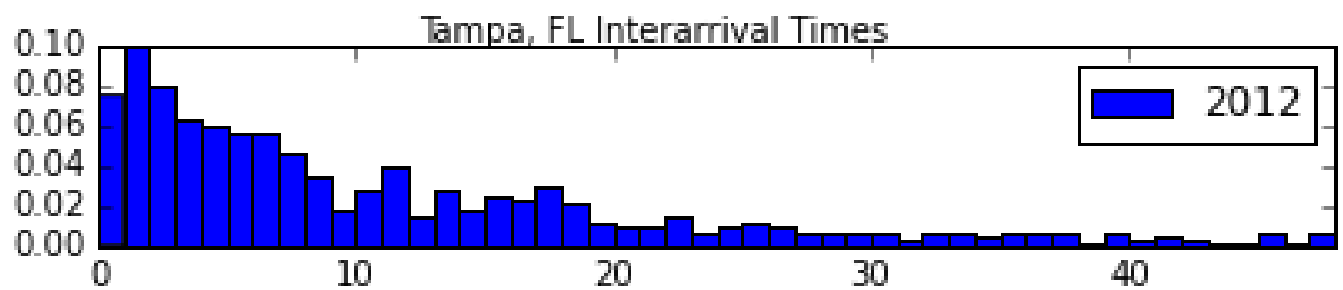
Tampa, FL Vessel Arrival Water Surface Elevation
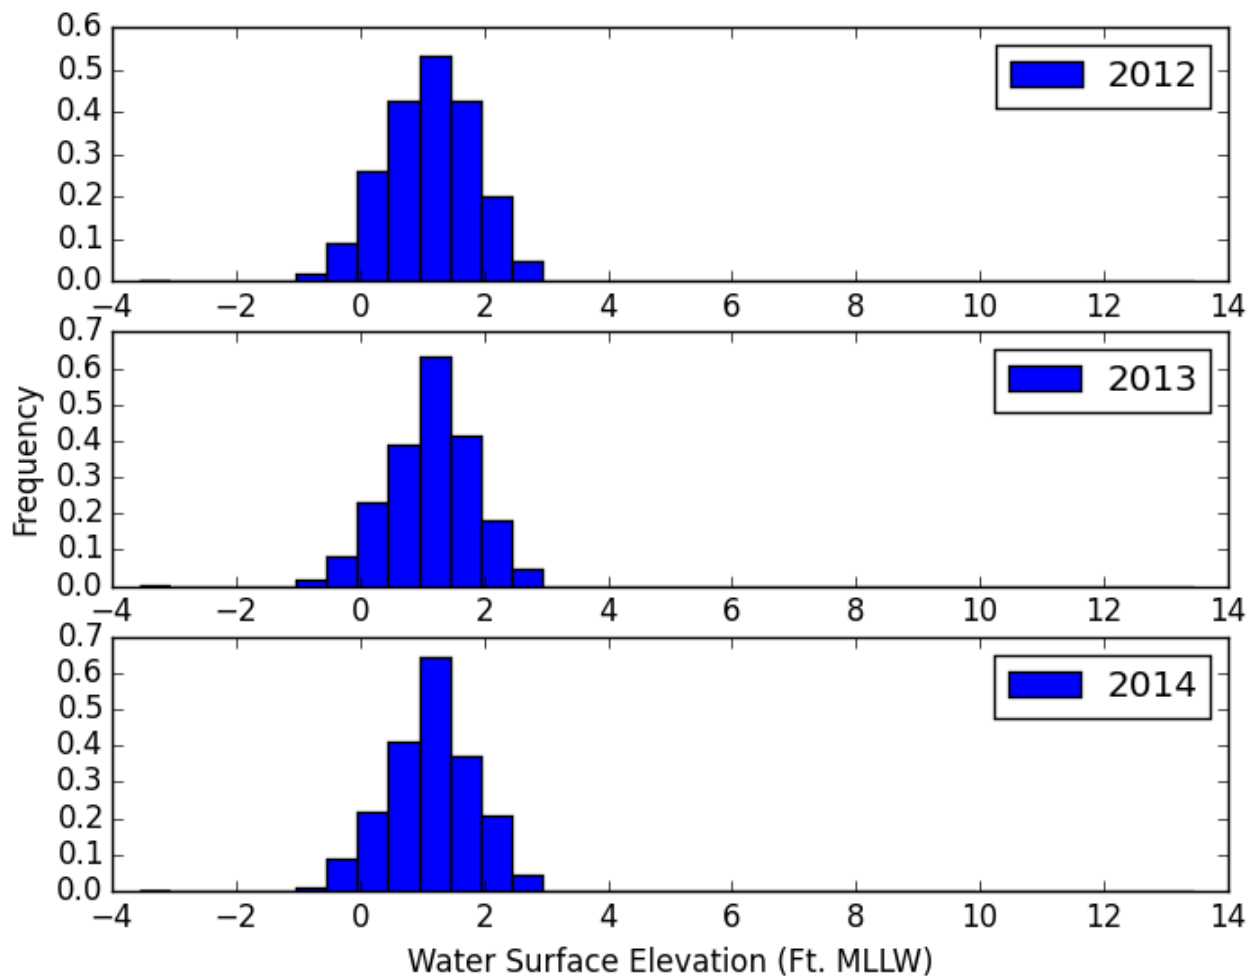
REPORT DOCUMENTATION PAGE

1. REPORT DATE	2. REPORT TYPE	3. DATES COVERED (From - To)
January 2017	Final	

4. TITLE AND SUBTITLE
Tidal analysis and Arrival Process Mining Using Automatic Identification System (AIS) Data

5a. CONTRACT NUMBER

5b. GRANT NUMBER

5c. PROGRAM ELEMENT NUMBER

6. AUTHOR(S)
Brandan Scully

5d. PROJECT NUMBER
454634

5e. TASK NUMBER

5f. WORK UNIT NUMBER

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
U.S. Army Engineer Research and Development Center
Coastal and Hydraulics Laboratory
3909 Halls Ferry Rd.
Vicksburg, MS 39180-6199

8. PERFORMING ORGANIZATION REPORT NUMBER
ERDC/CHL TR-17-2

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)
U.S. Army Corps of Engineers
Washington, DC 20314-1000

10. SPONSOR/MONITOR'S ACRONYM(S)
HQUSACE

11. SPONSOR/MONITOR'S REPORT NUMBER(S)

12. DISTRIBUTION/AVAILABILITY STATEMENT
Approved for public release; distribution is unlimited.

13. SUPPLEMENTARY NOTES

14. ABSTRACT

This work presents a method for extracting vessel arrival times and arrival processes from Automatic Identification System (AIS) data. This work employs the methodology presented by Mitchell and Scully (2014) for inferring tidal elevation at the time of vessel movement and calculating the tidal dependence (TD) parameter to 23 U.S. port areas for the years 2012–2014. Tidal prediction stations and observation reference lines are catalogued for considered ports. AIS data obtained from the U.S. Coast Guard, and 6-minute tide predictions, obtained from the National Oceanographic and Atmospheric Administration, are used to rank relative tidal dependence for arriving cargo and tank vessel traffic in studied locations. Results include relevant tide range and elevation threshold observations for each year and location studied. AIS-derived arrival processes, including arrival frequency, arrival rate, and interarrival time are visualized using several techniques with comparative discussion between ports to highlight implications for understanding seasonal traffic trends or port resiliency. The ports with the highest and lowest TD value, Portland, ME, and Los Angeles, CA, respectively, are discussed with regard to weekly arrival patterns and interarrival time. Cargo composition and value obtained through the Channel Portfolio Tool is also considered.

15. SUBJECT TERMS
Channels, Data processing, Dredging—Planning, Harbors, Inland navigation, Remote sensing, Ships—Automatic identification systems, Tides

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE	SAR	134	Brandan M. Scully
Unlimited	Unlimited	Unlimited			19b. TELEPHONE NUMBER (Include area code) 843-329-8168